



ENGLISH

Datasheet

AA Rechargeable Battery Packs

Nickel Metal Hydride Battery Pack

[RS Stock No. 777-0374](#)





RS Article : 7770374		AA x 5
Nominal Voltage		6.0V
Capacity	Typical	1300 mAh/0.2 CmA
	Minimum	1200 mAh/0.2 CmA
Charge	Standard	0.1 CmA for 16 hrs.
		1CmA for 1.2hrs.(approx.)
	Rapid	(With- V, Temp., Time charging control)
	Trickle	0.03 CmA (1 month)
Maximum Discharge Current		1 CmA
Discharge Cut-off Voltage		5.0 V
Cycle Life		500 cycles (condition as para 4-3)
Applicable	Standard Charge	0~+45°C
Temperature	Rapid Charge	0~+40°C
	Discharge	-10~+60°C
	Within one year	-20°C~+35°C
Storage	Within 3 months	-20°C~+45°C
	Within 1 month	-20°C~+55°C
Relative Humidity Range		65%±20%
Weight		Approx. 105 g

1. Scope of Application

This specification is applied to Nickel-Metal Hydride Rechargeable battery packs, AA x 5

(This specification is available only for the testing within one month since receipt of battery packs.)



2. General

(1) Type	: AA x 5
(2) Nominal Voltage	: 6.0 V
(3) Typical Capacity	: 1300 mAh (0.1CmA for 16hrs/0.2CmA discharge)
(4) Minimum Capacity	: 1200 mAh (0.1CmA for 16hrs/0.2CmA discharge)
(5) Standard Charge	: 0.1C mA x 16 hrs.
(6) Rapid Charge	: 1.0 CmA 1.2 hrs.(Maximum) : (with- V charging control,- V=5~10mV/cell)
(7) Trickle Charge	: 0.03 CmA(1 month)
(8) Cycles Life	: 500 cycles
(9) Maximum Discharge Current	: 1.0 CmA
(10) Discharge Cut-off Voltage	: 5.0 V
(11) Applicable Temp. Range	
Standard Charge	: 0°C~+45°C
Rapid Charge	: 0°C~+40°C
Discharge	: -10°C~+60°C
(12) Storage	
Within one year	: -20°C~+35°C
Within 3 months	: -20°C~+45°C
Within 1 month	: -20°C~+55°C
(13) Applicable Relative Humidity Range	: 65%±20%
(14) Weight	: approx. 105 g



3. Construction and Design

The battery pack is consisted of five (5) AA cells connected in series. The design, construction and physical dimensions are shown in the product drawing.

4. Electrical Characteristics

4-1. Terminal Voltage

Open circuit voltage (O.C.V.) shall be 6.25 V (minimum) within two weeks at room temperature after full charge.

4-2. Capacity

The battery packs deliver 1300mAh capacity at 0.1CmA charge rate for 16 hrs, then 0.2CmA discharge rate to 5.0 V. And the capacity of the battery packs are over 1200 mAh at 0.2CmA discharge. The actual capacity depends on the operating temperature and the cycling conditions.

4-3. Cycle-life

The battery pack is capable of 500 cycles under the following conditions:

Cycle number	Charge	Rest	Discharge
1	0.10CmA for 16 hrs	0.5hr	0.25CmA for 2 hrs 20 mins
2~48	0.25CmA for 3 hrs 10 mins	0.5hr	0.25CmA for 2 hrs 20 mins
49	0.25CmA for 3 hrs 10 mins	0.5hr	0.25CmA to 1.0V/cell
50	0.10CmA for 16 hrs	1.0hr	0.20CmA to 1.0V/cell

50 cycles test as per above table is repeated. The discharge time of the 100th, 200th, 300th, 400th, 500th should be more than 3 hours respectively. After 500 cycles, the capacity is still over 70% of rated capacity. The actual cycle life depends on the operating temperature and cycling conditions.



4-4. Overcharge

1. The battery packs are charged at 0.5 CmA for 2.4 hours. After charging, the packs show no change in the cell appearance, no leakage, and no fire or explosion.
2. The battery packs are charged at less than 0.03 CmA for a long term (over one month). After charging, the packs show no change in the cell appearance, no leakage, and no fire or explosion.

4-5. Short Test

The battery packs are fully charged, then shorted by connecting the positive to the negative terminals. The battery discharging is cut off by the fuse. The battery has no leakage observed, no change in the battery appearance, and no fire or explosion.

4-6. Self Discharge

1. After one-month storage of a fully charged battery pack at room temperature (25°C), the capacity of battery pack has 70% of rated capacity, 0.2 CmA discharge to 5.0 V.
2. After one-week storage of a fully charged battery pack at 45°C, the capacity of battery Pack has 70% of rated capacity, 0.2 CmA discharge to 5.0 V.

4-7. Welding strength of the nickel terminals

Welding strength of nickel terminals is tested in perpendicular direction. The welding strengths are over 1 kgf.

4-8. Vibration Test

Cells are tested as follows:

(1) Amplitude	: 3.6mm peak to peak
(2) Frequency	: 1000cpm
(3) Direction and time	: Arbitrary direction continuously for 1 hour.
(4) Performance	: The cell shall be normality in appearance and no leakage.



4.9. Shock Test






Cells are tested as follows:

(1) Dropping Distance	: 0.45m (spontaneous dropping)
(2) Shock board	: Made of hard wood (Thickness : over 10mm)
(3) Dropping Time	: Arbitrary direction for 3 times.
(4) Performance	: The cell shall be normality in appearance and no leakage.

5. Safety Requirement for User

Please keep in mind the following points when operating, designing, or manufacturing your equipment.

1. Avoid short-circuiting of the battery pack. Do not connect the positive and the negative terminals with a wire or other metal items, as this will cause a large flow of current through the battery pack. It may damage the cells in the pack.
2. Do not attempt to take battery pack apart or subject to pressure or impact. The parts of the pack will be damaged, when the cells in the pack have ruptured, heat may be generated or fire may result. The alkaline electrolyte may harm the skin or eyes or damage clothing upon contact.
3. Do not heat or incinerate the battery pack. The battery may swell or rupture and it may explode or release alkaline electrolyte
4. Do not solder directly to the battery. It may damage the battery.
5. If any abnormally or problem is found while using the battery pack, stop its use, and bring it to your local dealer. Please do not attempt to fix or take the battery pack apart. It may cause dangerous to you.
6. Charge the battery only with a charger specified with a charger that meets our specified conditions. Charging under other conditions can cause overcharging and loss of charging control, and can cause the battery to leak, overcharging and loss of charging control, and can cause the battery to leak, overheat, burst, or catch fire.

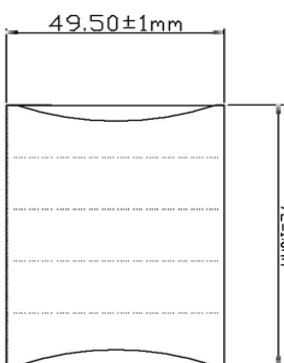

ITEM	Name	Spec.	Quantity	
A	Battery	Nexcell Ni-NH AA 1.2V 1300mAh	5	
B	contact strip	4*17*0.1±	4	
C	contact strip	∅2*0.2±	2	
D	single cell seelve	PVC GREEN	5	
E	PACK JACKET	PVC GREEN	1	
ELECTROCHEM AUTOMATIKNKSHANGHADCEI,LTD				
Drawing No.	5440188	v0	Name	AAx5
Drawing	Linda lin		Check	
date	2013/5/07		date	