



## B-06 Series

### Probe

50 MIL CENTERS  
1.27 mm pitch



### Spec

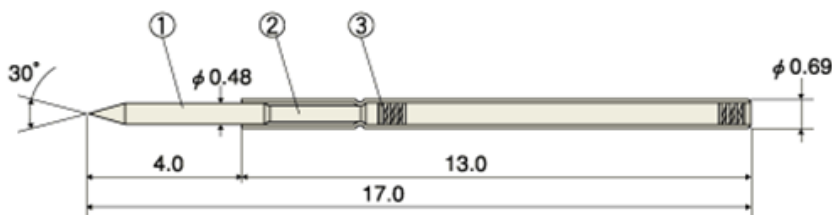


<b>●B-06PO-00</b> 	<b>●B-06OW-02</b> 	<b>●B-06OW-00</b> 	<b>●B-06RA-00</b> 
<b>●B-06SAH-10</b> 	<b>●B-06ENH-10</b> 	<b>●B-06CUH-10</b> 	<b>●B-06CU-00</b> 
<b>●B-06FL-00</b> 	<b>●B-06DAH-08</b> 	<b>●B-06FLH-08</b> 	<b>●B-06OWH-08</b> 

- Allowable current: 3A
- Resistance: 50mΩ
- A pressure of 2/3 strokes: 80g
- Stroke: 2.0mm
- . 1 Plunger: beryllium copper (rhodium plating)
- . 2 barrel: white copper (gold plated)
- . 3 Spring: piano wire (gold plated)


SS-06H-6

Socket



Spec

SS-06H-6

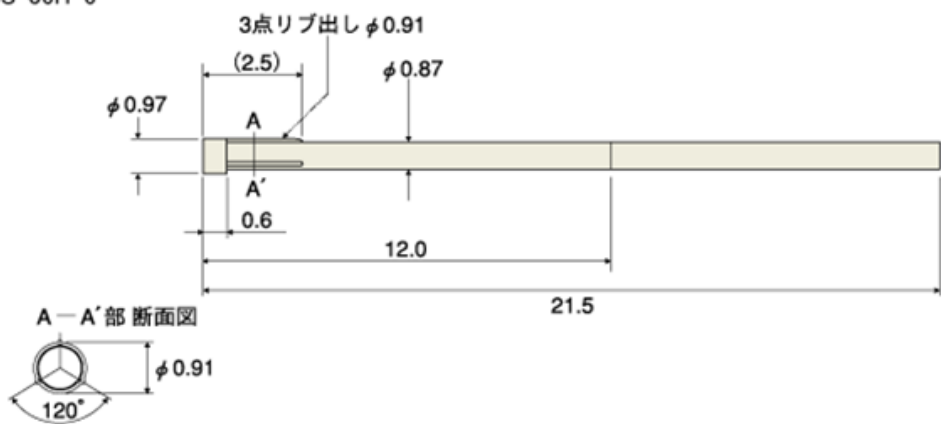


- Mounting Hole Size:  $\phi 0.9\text{mm}$
- Mounting holes minimum center-to-center spacing: 1.27mm
- And surface treatment material: brass pipe (gold plated)
- Connection method: Solder


## B-10 Series

### Probe

75 MIL CENTERS  
1.91 mm pitch



### Spec

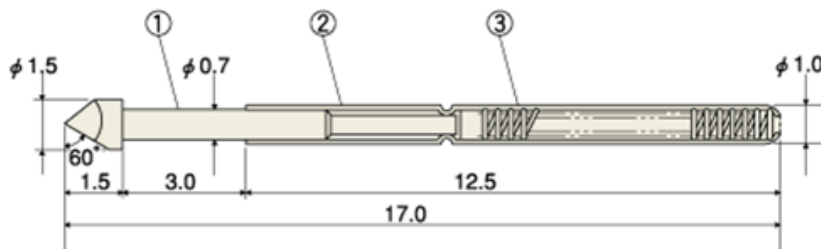


<b>●B-10CUH-15</b> 	<b>●B-10CU-00</b> 	<b>●B-10PO-00</b> 	<b>●B-10DAH-15</b> 
<b>●B-10FL-00</b> 	<b>●B-10RA-00</b> 	<b>●B-10RAH-10</b> 	<b>●B-10SAH-15</b> 
<b>●B-10OWH-15</b> 	<b>●B-10ENH-15</b> 	<b>●B-10FLH-15</b> 	

- Allowable current: 3A
- Resistance: 50mΩ
- A pressure of 2/3 strokes: 60g
- Stroke: 2.0mm
- . 1 Plunger: beryllium copper (rhodium plating)
- . 2 barrel: nickel silver (gold plated)
- . 3 Spring: piano wire (gold plated)

**S-10H-0(3R)**

**Socket**


---



**Spec**

---

**S-10H-0(3R)**

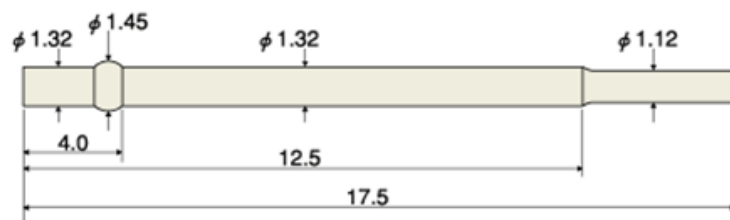


- Mounting Hole Size: 1.40mm
- Mounting holes minimum center-to-center spacing: 1.91mm
- And surface treatment material: brass pipe (gold plated)
- Connection method: Solder


## B-13 Series

### Probe

100 MIL CENTERS  
2.54 mm pitch



### Spec

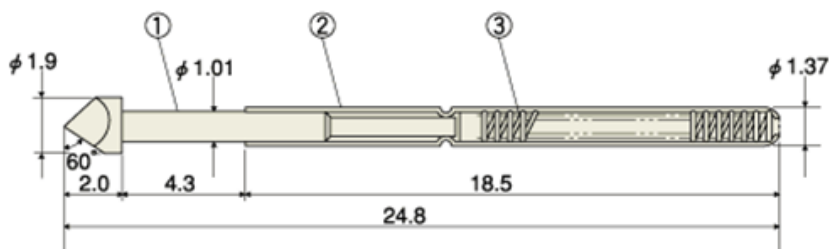


<b>●B-13PO-00</b> 	<b>●B-13ENH-15</b> 	<b>●B-13ENH-19</b> 	<b>●B-13CIH-18</b> 
<b>●B-13RA-00</b> 	<b>●B-13SAH-15</b> 	<b>●B-13SAH-19</b> 	<b>●B-13SCH-18</b> 
<b>●B-13CUH-19</b> 	<b>●B-13CU-00</b> 	<b>●B-13DAH-19</b> 	<b>●B-13FL-00</b> 
<b>●B-13RAH-12</b> 	<b>●B-13OWH-19</b> 	<b>●B-13FLH-19</b> 	

- Allowable current: 3A
- Resistance: 50mΩ
- A pressure of 2/3 strokes: 80g
- Stroke: 4.3mm
- . 1 Plunger: beryllium copper (rhodium plating)
- . 2 barrel: brass (gold plated)
- . 3 Spring: piano wire (gold plated)

## S-13 Series

### Socket


---




### Spec

---


#### S-13H- $\phi 1.75$

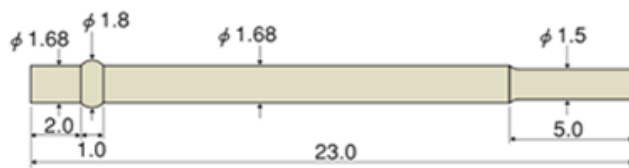

#### S-13P- $\phi 1.75$



#### S-13J- $\phi 1.75$




- Mounting Hole Size:  $\phi 1.70\text{mm}$  /  $\phi 1.75\text{mm}$
- Mounting holes minimum center-to-center spacing: 2.54mm
- And surface treatment material: brass pipe (gold plated)
- 703104-2M-500 S-13J- $\phi 1.75$  solder S-13H- $\phi 1.75$ , wrapping S-13P- $\phi 1.75$ , post terminal terminal lead wire with: Wiring method



## BL-04 Series

### Probe

40 MIL CENTERS  
0.9 mm pitch



### Spec

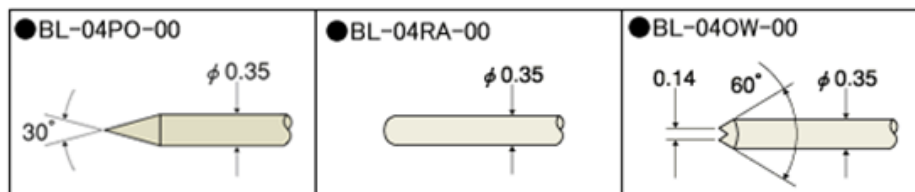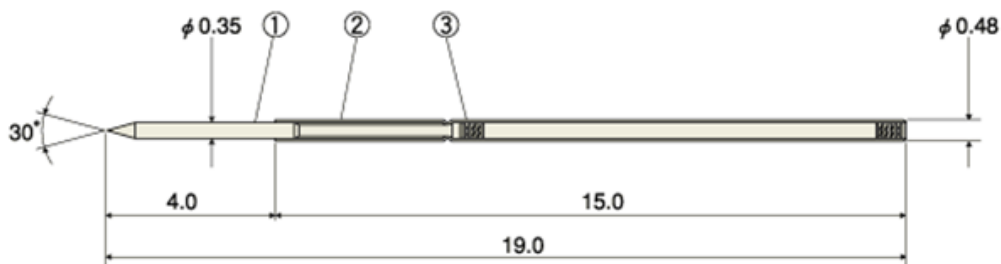


- Allowable current: 3A
- Resistance: 50mΩ
- A pressure of 2/3 strokes: 40g
- Stroke: 1.3mm
- . 1 plunger: carbon tool steel (rhodium plating)
- . 2 barrel: Phosphor bronze (gold plated)
- . 3 Spring: piano wire (gold plated)

## SL-04H-1

### Socket


---



### Spec

---

#### SL-04H-1

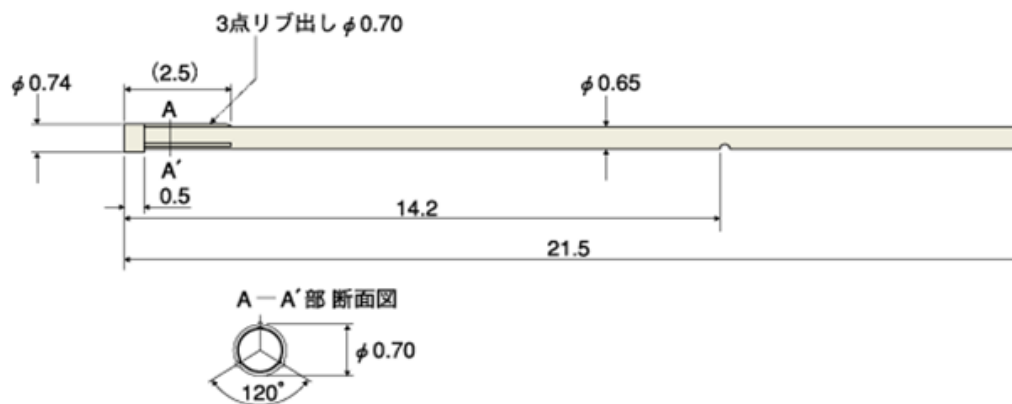

- Mounting Hole Size:  $\phi 0.70 \pm 0.01\text{mm}$
- Mounting holes minimum center-to-center spacing: 0.9mm
- And surface treatment material: phosphor bronze (gold plated)
- Connection method: Solder


- Mounting Hole Size:  $\phi 1.70\text{mm} / \phi 1.75\text{mm}$
- Mounting holes minimum center-to-center spacing: 2.54mm
- And surface treatment material: brass pipe (gold plating), the SL-13H3 (7R) SL-13U-1 (7R), SL-13P-  $\phi 1.75$ , SL-13J-  $\phi 1.75$  nickel copper alloy pipe (gold plated)
- 703104-2M-500SL-13J  $\phi 1.75$  solder SL-13U-1 (7R) • SL-13H-3 (7R), wrapping SL-13P-  $\phi 1.75$ , post terminal terminal lead wire with: Wiring method




## BL-13 Series

### Probe


100 MIL CENTERS  
2.54 mm pitch




### Spec

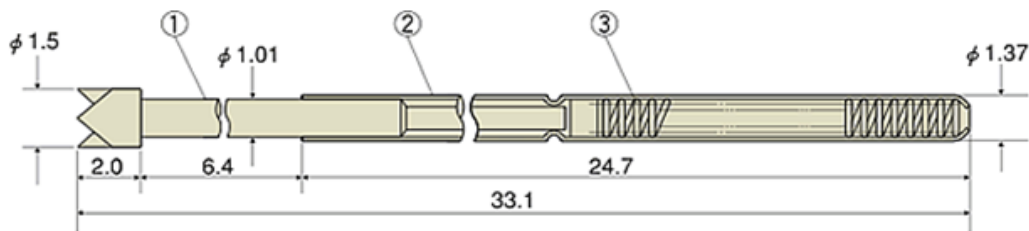


#### ●BL-13PO-00




#### ●BL-13OW-00




#### ●BL-13DA-00




#### ●BL-13SAH-14




#### ●BL-13OWH-15



#### ●BL-13DAH-15



#### ●BL-13CUH-15



- Allowable current: 3A
- Resistance: 50mΩ
- A pressure of 2/3 strokes: 100g
- Stroke: 6.4mm
- 1 Plunger: beryllium copper (rhodium plating)
- 2 barrel: brass (gold plated)
- 3 Spring: piano wire (gold plated)


## SL-13 Series

### Socket





## Spec

SL-13U-1(7R)

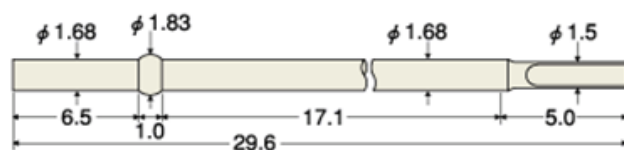

SL-13H-3(7R)

A—A'部 断面图

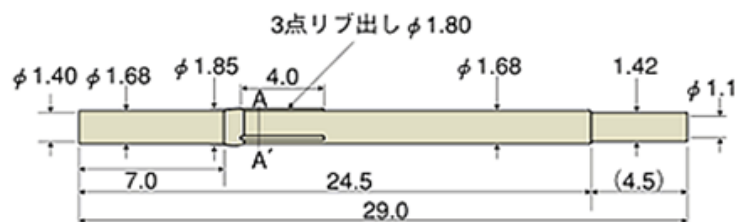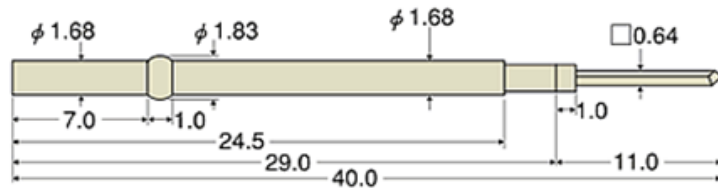SL-13P- $\phi$  1.75SL-13J- $\phi$  1.75