

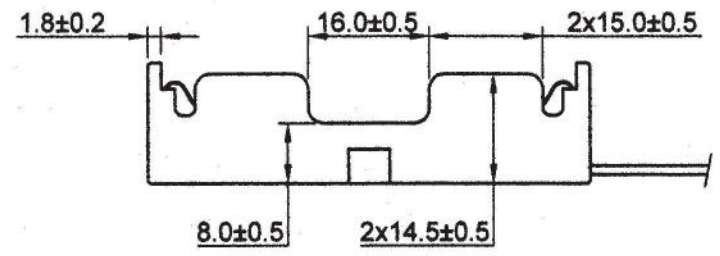



1392


CONTACT & WIRE ASSEMBLY

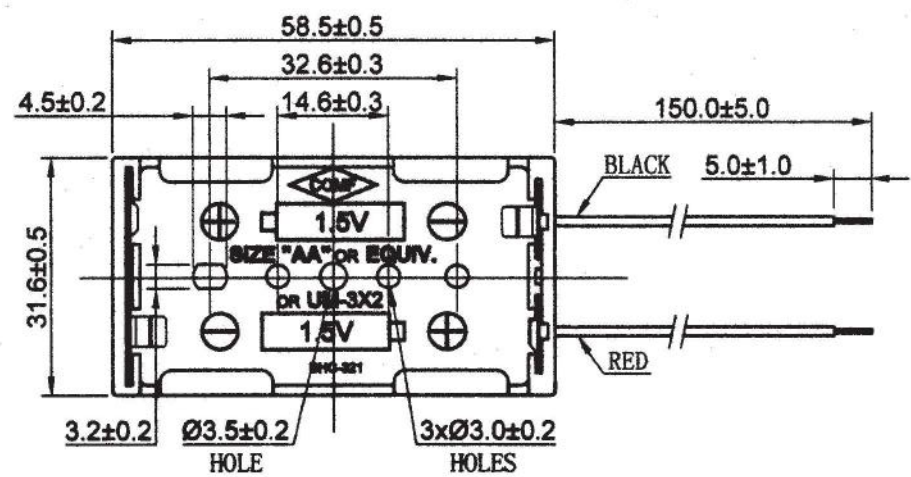


1. ANODE CONTACT & WIRE COMBINATION
MATERIAL: BRASS NICKEL PLATED



2. CATHODE CONTACT & WIRE COMBINATION
MATERIAL: PHOSPHOR BRONZE NICKEL PLATED



3. CATHODE ANODE: SPRING STEEL NICKEL PLATED



SPECIFICATION

- (1) ITEM NO.: BHC-321A150MM
- (2) WIRE: UL1007 AWG #26
BLACK & RED: 150MM±5MM
STRIP & TIN: 5MM±1MM
- (3) HOLDER MATERIAL: PP UL94HB RESIN, BLACK COLOR
- (4) CONTACT MATERIAL:
ANODE: 0.25MM THICK BRASS NICKEL PLATED
CATHODE: 0.25MM THICK PHOSPHOR BRONZE NICKEL PLATED
CATHODE ANODE: 0.20MM THICK SPRING STEEL NICKEL PLATED
- (5) RoHS COMPLIANT

3								
2								
1			NAME	BATTERY HOLDER: BHC-321A150MM				
NO.	MODIFICATION	DATE	SCALE	1:1	APPD	游原正		
General Tolerances			 The Third Angle Projection	UNIT	MM	CHKD	黄永连	
0 ~ >3	± 0.10	30 ~ >120		± 0.30	MAT'L	SEE SPEC.	DWN	RAOXIANHUI
3 ~ >6	± 0.10	120 ~ >400		± 0.50	DATE	NOV. 10. 2014	DR NO	321A-1114
6 ~ >30	± 0.20	Angle: ± 3°						