


C0562-XXMBAXXR

**ELECTRICAL CHARACTERISTICS**

Contact Current Rating:3Ampères.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:25Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

**Material**

Contact :Copper Alloy.  
 Insulator:PBT. [Select PA6T /LCP /PA9T]  
 Shell: SPCC.  
 Z-Piece: Copper Alloy.  
 Screw: Copper Alloy.  
 Rivet: Copper Alloy. or Zinc.

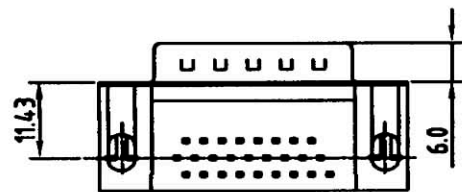


**Note:**

No.	A	B	C	E	F	H
15	16.92	24.99	30.81	2.29	1.145	7.04
26	25.25	33.32	39.14	2.29	1.145	6.88
44	38.96	47.04	53.04	2.29	1.145	6.88
62	55.42	63.50	69.32	2.41	1.205	7.00

S:C0562-XXMACXXR  
 L:C0562-XXMAEXXR



S:C0562-XXMBCXXR  
 L:C0562-XXMBEXXR

S:C0562-XXMBBXXR  
 L:C0562-XXMBDXXR

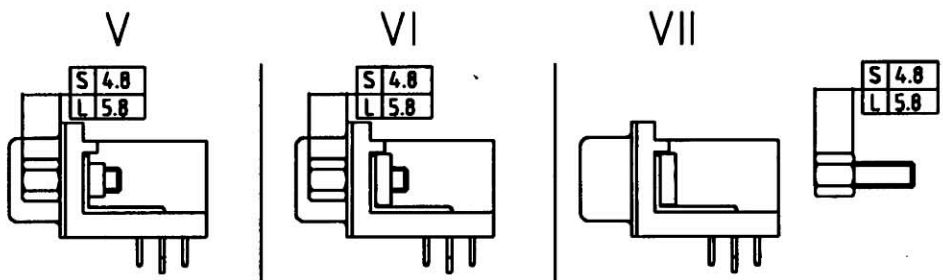

Re Layout P.C.B.  
 15 POSITION

Re Layout P.C.B.  
 26 /44 /62POSITION

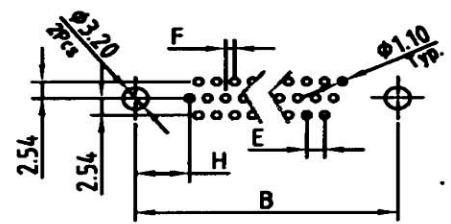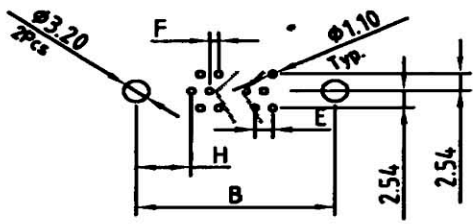

**RoHS  
 Compliant**

C0562-15MACASBR

APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名 HIGH DENSITY D-SUB PCB RIGHT ANGLE STAMPED XXP MALE TYPE ROSH LOW-LEAD
DWG. 製圖 HELEN		0.00 ± 0.25 ANG ± 2°	
DATE 制表日 2008/8/12	UNIT 單位 MM	SIZE. 線規尺寸 A4	
	PAGE 張數 1 OF 1	REV. 版本 A	