


1 2 3 4 5 6 7 8

A

A

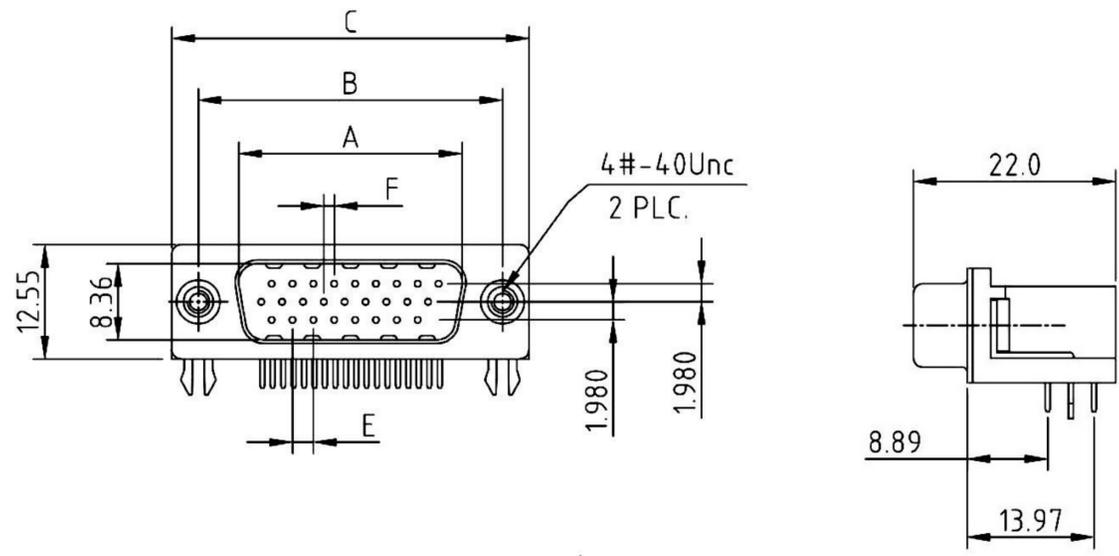

ELECTRICAL CHARACTERISTICS


Contact Current Rating:3Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:25Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.
 Insulator:PBT. (Select PA6T /LCP /PA9T)
 Shell: SPCC.
 Z-Piece: SPCC.
 Screw: Copper Alloy.
 Rivet: Copper Alloy. or Zinc.

B

B

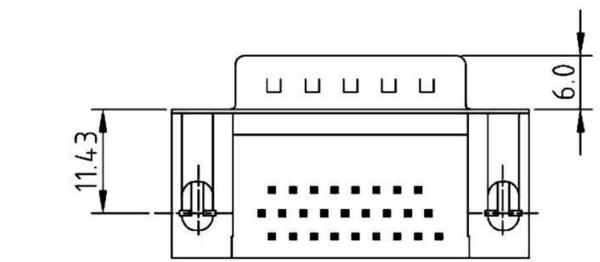

C0562-XXMBAXXR

C

C



No.	A	B	C	E	F	H
15	16.92	24.99	30.81	2.29	1.145	7.04
26	25.25	33.32	39.14	2.29	1.145	6.88
44	38.96	47.04	53.04	2.29	1.145	6.88
62	55.42	63.50	69.32	2.41	1.205	7.00

D

D

Re Layout P.C.B.
15 POSITION




Re Layout P.C.B.
26 /44 /62POSITION

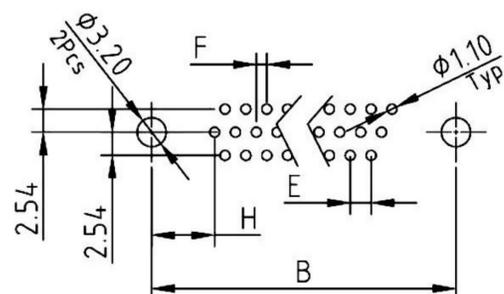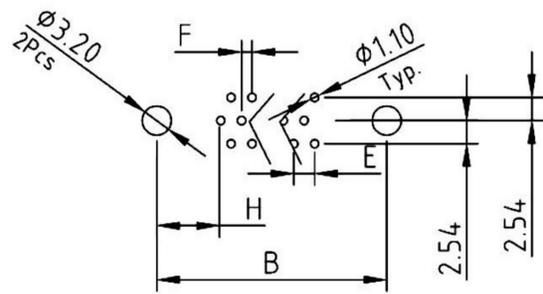

S:C0562-XXMACXXXR
L:C0562-XXMAEXXR

S:C0562-XXMBCXXXR
L:C0562-XXMBEXXR

S:C0562-XXMBBXXXR
L:C0562-XXMBDXXR

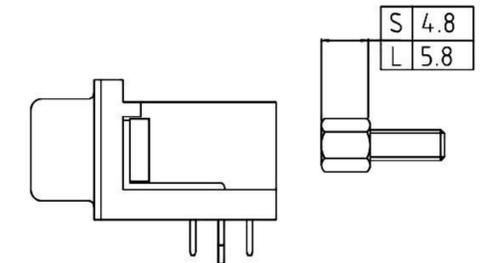

E

E

F

F

G

G

C **0562** — **15** **M** **B** **A** **B** **G** **B** **R**

- 1. PRODUCTS:
C:Connector
- 2. SERIES NO.:
0562
- 3. CONTACT NO.:
15,26,44,62
- 4. CONTACT TYPE:
M:Male
- 5. MOUNTING OPTION:
A:Boardlock(Z-Shape)
B:Rivet W/Boardlock (Z-Shape)
- 6. ACCESSORIES:
A:Non Accessories
B:Add Screws(4.8*11.8)
C:Fix Screws(4.8*11.8)
D:Add Screws(5.8*12.0)
E:Fix Screws(5.8*12.0)
- 7. SHELL PLATING:
A:Tin+Dimple
B:Nickel+Dimple
- 8. CONTACT PLATING:
G:Gold Flash
- 9. OTHERS:
B:Black Insulator
- 10. R:ROHS

RoHS
Compliant



APPD. 核准 HELEN	TOLERANCE 容許公差 .X ±0.30 .XX ±0.25 .XXX ±0.15 Ang. ±2°	PART NAME 品名 HIGH DENSITY D-SUB PCB RIGHT ANGLE STAMPED PIN XXP MALE ROHS
DWG. 製圖 ABBY		
DATE 制表日 2019/05/29	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	REV. 版次 B
PART NO. 料號 C0562-15MACBGBR		

H

H

1 2 3 4 5 6 7 8