


継手 FITTINGS

エルボ ELBOW


90°エルボ

90°Elbow

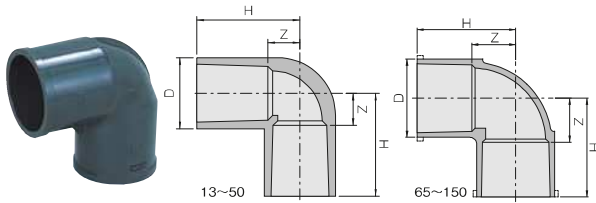

HI-PVC

呼び径 Size	D	H	Z	重量 Weight (kg)
13	24	36	10	0.022
16	29	43	13	0.036
20	33	52	17	0.050
25	40	60	20	0.076
30	46	67	22	0.105
40	58	82	29	0.201
50	70	99	36	0.309
65	87	114	48	0.536
75	102	125	59	0.803
100	130	156	70	1.653
125	160	186	82	2.760
150	189	229	98	4.584
200	243	262	117	6.600
250	300	318	143	10.800
300	356	355	170	15.500



破線はFRP補強品の1.0MPa仕様です。
Dashed shape for Fiber Reinforced 1.0MPa fitting.



HT(C-PVC)

呼び径 Size	D	H	Z	重量 Weight (kg)
16	31	38.5	13	0.041
20	36	50	15	0.069
25	42	58.5	18	0.094
30	48	63	22.5	0.122
40	58	73.5	28	0.183
50	70	85.5	35	0.272
65	87	112.5	43.5	0.551
75	102	124	45.5	0.856
100	130	155	60	1.740
125	157	189	83	2.970
150	186	229	96	5.047

90°ベンド

90°Bend




破線はFRP補強品の1.0MPa仕様です。
Dashed shape for Fiber Reinforced 1.0MPa fitting.

HI-PVC

呼び径 Size	H	Z	R	重量 Weight (kg)
200	341	196	196	7.370
250	428	253	242	13.970
300	441	256	242	19.690


45°エルボ

45°Elbow

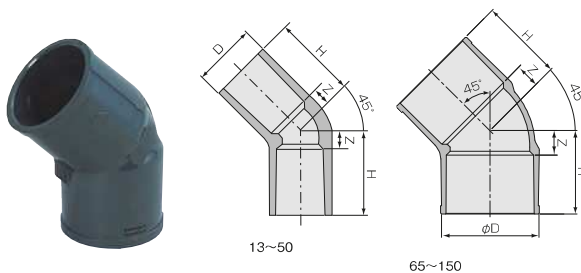


HI-PVC

呼び径 Size	D	H	Z	重量 Weight (kg)
13	24	36	10	0.018
20	33	44	9	0.039
25	40	51	11	0.065
30	46	56	12	0.078
40	57	69	14	0.133
50	70	81	18	0.245
65	87	94	33	0.460
75	102	98	34	0.660
100	130	123	39	1.262
125	160	149	44	1.700
150	190	184	51	3.120
200	243	205	60	5.600
250	300	254	79	8.760
300	356	280	95	13.200



破線はFRP補強品の1.0MPa仕様です。
Dashed shape for Fiber Reinforced 1.0MPa fitting.

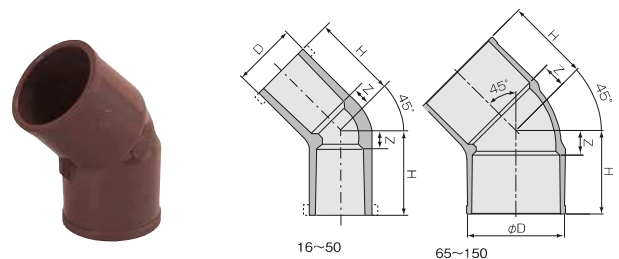

HT(C-PVC)

呼び径 Size	D	H	Z	重量 Weight (kg)
16	29	33	8	0.041
20	34	44	9	0.067
25	41	50	10	0.090
30	46	53	13	0.110
40	56	61	16	0.155
50	69	80	30	0.296
65	91	94	24	0.495
75	106	98	26	0.740
100	134	123	31	1.330
125	166	149	44	1.800
150	189	184	51	3.300