
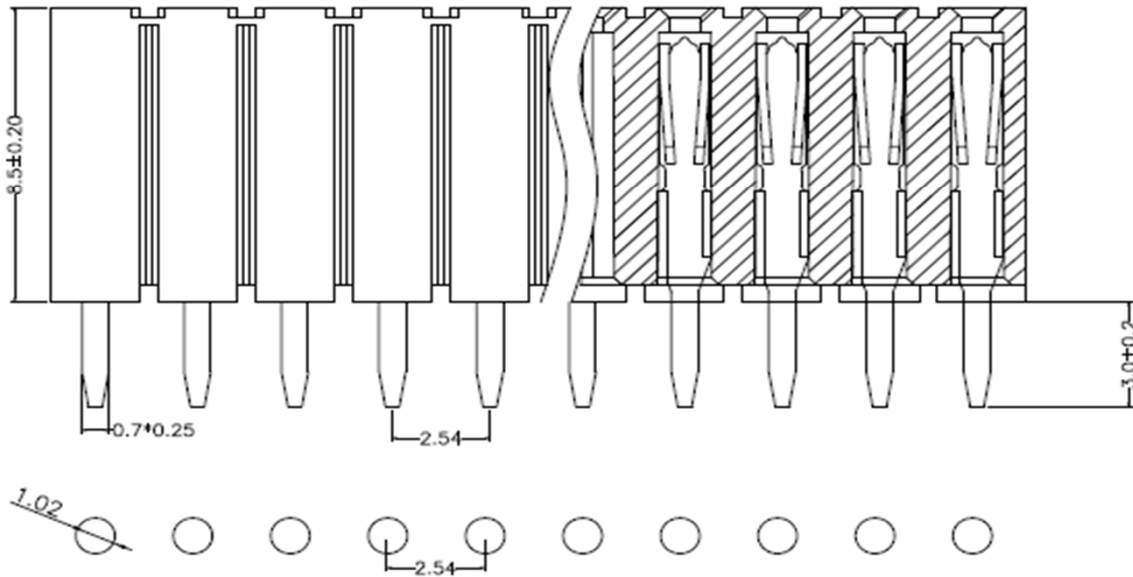


RoHS Compliant

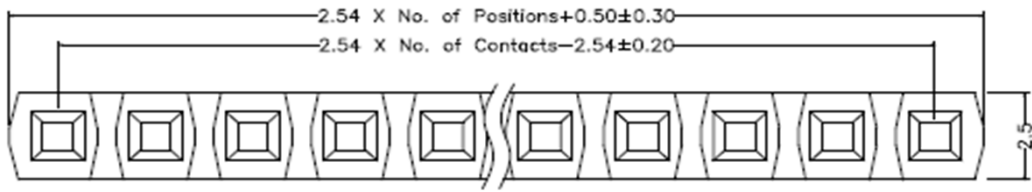

P.C.B LAYOUT

Material

Insulator: PBT + 30%G.F, UL94V-0

Contact: Brass

Gold plated over 50u" Ni.

Specification

Current rating: 3.0Amps/contact max.


Contact resistance: 20m ohm max.

Insulation resistance: 1,000M ohm min.

withstanding voltage: 1,000V AC per minute

Operating temperature: - 55°C ~ + 105°C

Soldering temperature: +220°C max.

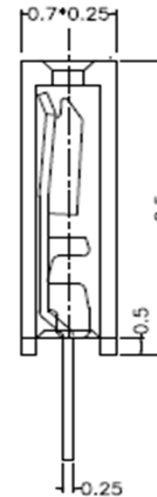

Order Information

FHU - 1 x XX S G

- * Contacts plating
- * S - Straight
- R - Right Angle
- * Contacts No.
- 1 ~ 42
- * Single row

Akizuki P/N	Useconn P/N	No of contact
C-05779	FHU-1x42SG	1x42

E				Drawn:	General Tolerance		
D				Jack Lin	.0	.00	.000
C				Checked:	±0.20	±0.15	±0.10
B	31-May-12	Change Logo	David	Ivy Lee	Unit : mm		
A	20-Nov-11	new release	Jack	Appraisal:	Scale :		
Rev.	Date	File	BY	Simon Chen	Sheet : 1/1		



**Useconn
Electronics Ltd.**

Part No.
FHU - 1xXXSG
File No.: RMFHU-1xXXSG

Title: 2.54mm Female PCB Header, U shape contacts
Insulator height 8.5mm, Straight, Single row