
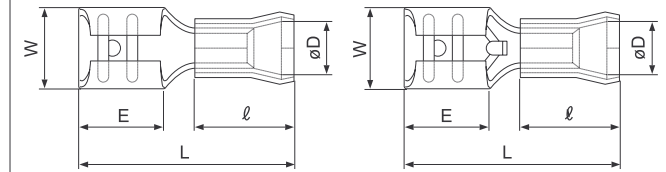
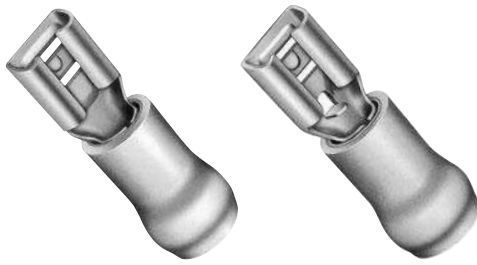


QUICK DISCONNECT

Female, Vinyl-insulated with copper sleeve



Without wire-stop

File No.: E70188 LR20812

	Applicable Wire AWG#(mm²)	Part No.	Standard	Dimensions mm (in.)							Color	Tool No.							Qty/box	
				W	L	E	ø D	ℓ	Material Thickness	Mating Tab Thickness		YNT-2622	YNT-2216	YNT-1614	YNT-1210S	YA-1	YA-2	YA-4		BCT-0514
110	26 to 22 (0.2 to 0.5)	FVDDF0.5-110A-5*	UL SP	3.7 (.146)	16.4 (.646)	6.4 (.252)	2.2 (.087)	8.0 (.315)	0.25(.010)	0.5 (.020)	Yellow	o				o	o		o	1,000
		FVDDF0.5-110A-8*	UL SP	3.7 (.146)	16.4 (.646)	6.4 (.252)	2.2 (.087)	8.0 (.315)	0.25(.010)	0.8 (.031)										
187	22 to 16 (0.25 to 1.65)	FVDDF1.25-110A-5	UL SP	3.7 (.146)	17.9 (.705)	6.4 (.252)	3.5 (.138)	9.5 (.374)	0.25(.010)	0.5 (.020)	Red		o			o	o	o	o	1,000
		FVDDF1.25-110A-8	UL SP	3.7 (.146)	17.9 (.705)	6.4 (.252)	3.5 (.138)	9.5 (.374)	0.25(.010)	0.8 (.031)										
		FVDDF1.25-187A-5	UL SP	5.7 (.224)	18.7 (.736)	6.0 (.236)	3.5 (.138)	9.5 (.374)	0.35(.014)	0.5 (.020)										
		FVDDF1.25-187A-8	UL SP	5.7 (.224)	18.7 (.736)	6.0 (.236)	3.5 (.138)	9.5 (.374)	0.35(.014)	0.8 (.031)										
	16 to 14 (1.04 to 2.63)	FVDDF2 -187A-5	UL SP	5.7 (.224)	18.7 (.736)	6.0 (.236)	4.3 (.169)	9.5 (.374)	0.35(.014)	0.5 (.020)	Blue			o		o	o	o	o	1,000
		FVDDF2 -187A-8	UL SP	5.7 (.224)	18.7 (.736)	6.0 (.236)	4.3 (.169)	9.5 (.374)	0.35(.014)	0.8 (.031)										
205	22 to 16 (0.25 to 1.65)	FVDDF1.25-205A-5*	UL SP	6.3 (.248)	18.7 (.736)	6.4 (.252)	3.5 (.138)	9.5 (.374)	0.4 (.016)	0.5 (.020)	Red		o			o	o	o	o	1,000
		FVDDF1.25-205A-8*	UL SP	6.3 (.248)	18.7 (.736)	6.4 (.252)	3.5 (.138)	9.5 (.374)	0.4 (.016)	0.8 (.031)										
	16 to 14 (1.04 to 2.63)	FVDDF2 -205A-5*	UL SP	6.3 (.248)	18.7 (.736)	6.4 (.252)	4.3 (.169)	9.5 (.374)	0.4 (.016)	0.5 (.020)	Blue			o		o	o	o	o	1,000
		FVDDF2 -205A-8*	UL SP	6.3 (.248)	18.7 (.736)	6.4 (.252)	4.3 (.169)	9.5 (.374)	0.4 (.016)	0.8 (.031)										
250	22 to 16 (0.25 to 1.65)	FVDDF1.25-250A	UL SP	7.4 (.291)	20.5 (.807)	7.8 (.307)	3.5 (.138)	9.5 (.374)	0.4 (.016)	0.8 (.031)	Red		o			o	o	o	o	1,000
	16 to 14 (1.04 to 2.63)	FVDDF2 -250A	UL SP	7.4 (.291)	20.5 (.807)	7.8 (.307)	4.3 (.169)	9.5 (.374)	0.4 (.016)	0.8 (.031)	Blue			o			o	o	o	1,000
	12 to 10 (2.63 to 6.64)	FVDDF5.5 -250A	UL SP	7.4 (.291)	24.5 (.965)	7.8 (.307)	6.2 (.244)	13.5 (.531)	0.4 (.016)	0.8 (.031)	Yellow				o			o	o	500
	22 to 16 (0.25 to 1.65)	FVDDF1.25-250B*	UL SP	7.6 (.299)	20.5 (.807)	8.0 (.315)	3.5 (.138)	9.5 (.374)	0.45(.018)	0.8 (.031)	Red		o			o	o	o	o	1,000
	16 to 14 (1.04 to 2.63)	FVDDF2 -250B*	UL SP	7.6 (.299)	20.5 (.807)	8.0 (.315)	4.3 (.169)	9.5 (.374)	0.45(.018)	0.8 (.031)	Blue			o			o	o	o	1,000
	12 to 10 (2.63 to 6.64)	FVDDF5.5 -250B*	UL SP	7.6 (.299)	24.5 (.965)	8.0 (.315)	6.2 (.244)	13.5 (.531)	0.45(.018)	0.8 (.031)	Yellow				o			o	o	500
375	16 to 14 (1.04 to 2.63)	FVDDF2 -375A*		11.0 (.433)	25.2 (.992)	12.0 (.472)	4.3 (.169)	9.5 (.374)	0.5 (.020)	1.1 (.043)	Blue			o		o	o	o	o	500
	12 to 10 (2.63 to 6.64)	FVDDF5.5 -375A*		11.0 (.433)	29.2(1.150)	12.0 (.472)	6.2 (.244)	13.5 (.531)	0.5 (.020)	1.1 (.043)	Yellow				o			o	o	250

Note: 1) Products marked with * are without wire-stop.

2) Delivery lead times may vary depending on the product. Contact JST for details.