

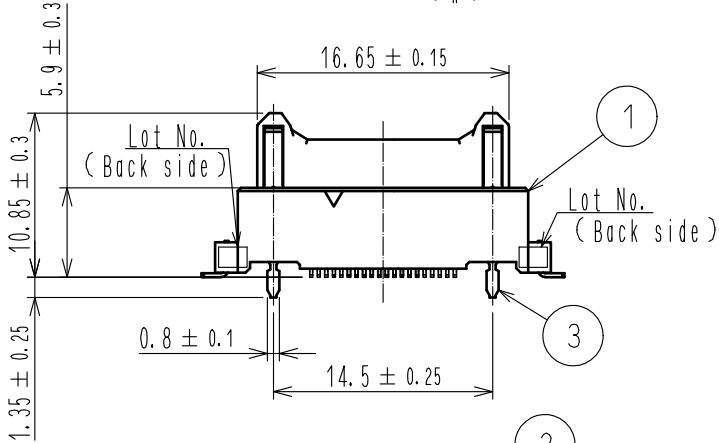
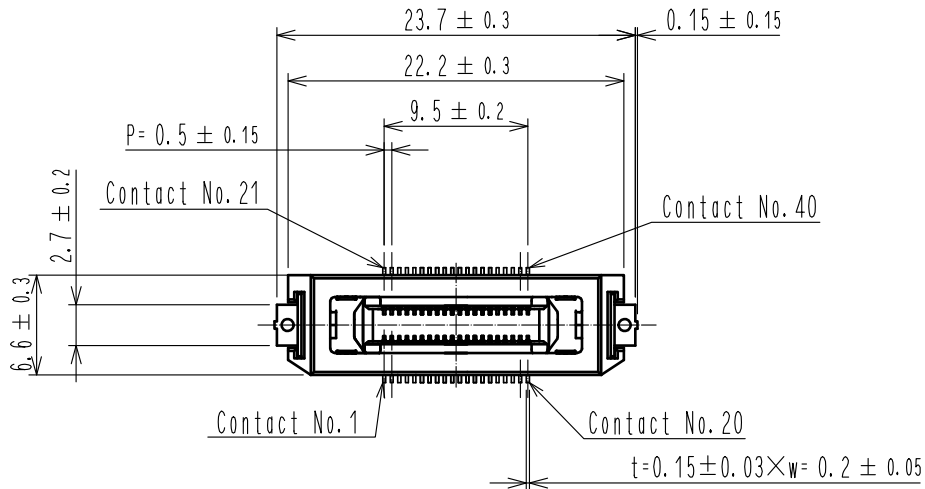
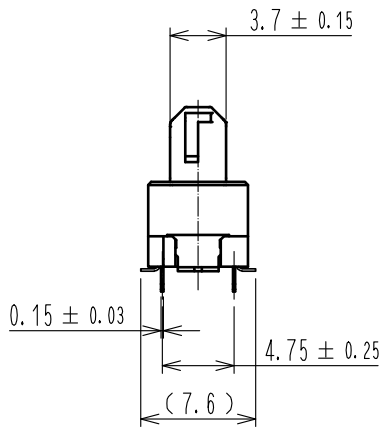


2 DRAWING FOR PACKING (No scale)

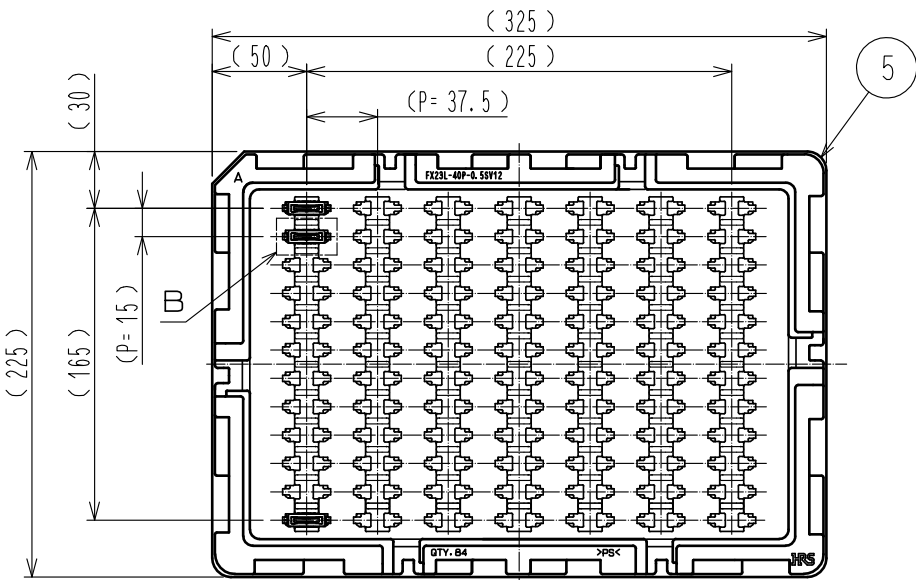


B (1 : 1)




RECOMMENDED LAND PATTERN DIMENSION OF PCB


(PCB THICKNESS: t = 1.6mm)

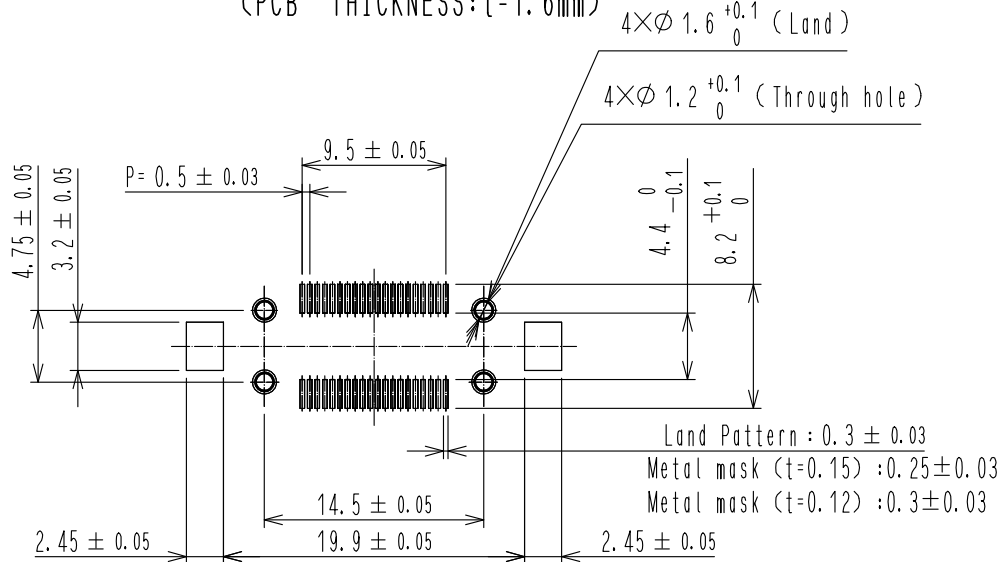

6 PCB DISTANCE (No scale)

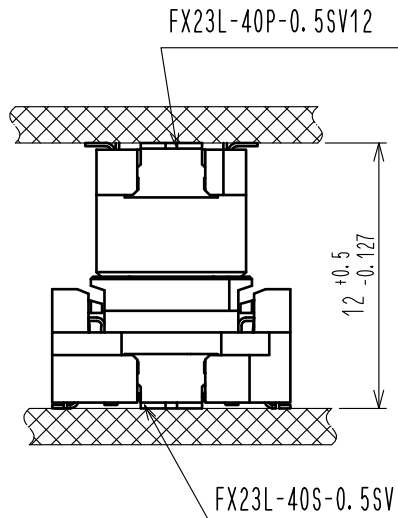

- Note
- 1 Lead CO—Planarity is 0.1mm MAX.
 - 2 This is packaged in tray. (84pcs/tray)
 - 3 It shows the vacuum pickup area. Remove the mylar tape before mating connectors.
 - 4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.
 - 5 The dimensions in parentheses are for references.
 - 6 Please use the connectors within the specified PCB distance.

			6	POLYIMIDE	(TAPE FOR VACUUM PICKUP)					
			5	POLYSTYRENE	(TRAY)					
2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm	4	BRASS	TIN-PLATING 1 μm					
		LEAD AREA:GOLD 0.03 μm	3	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm					
		UNDER PLATING:NICKEL 1.3 μm			LEAD AREA:TIN-PLATING 1 μm					
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3 μm					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA	15.02.24	DRAWING NO.	EDC3-358058-00			
				CHECKED : KN. SHIBUYA	15.02.24	PART NO.	FX23L-40P-0.5SV12			
				DESIGNED : AH. EDASHIGE	15.02.24	CODE NO.	CL573-2202-7-00			
				DRAWN : AH. EDASHIGE	15.02.24	 1/1				