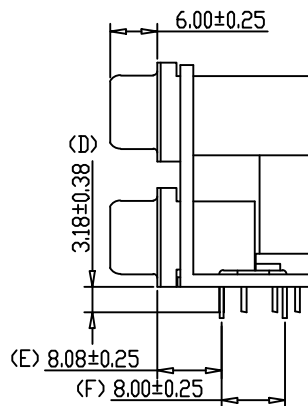
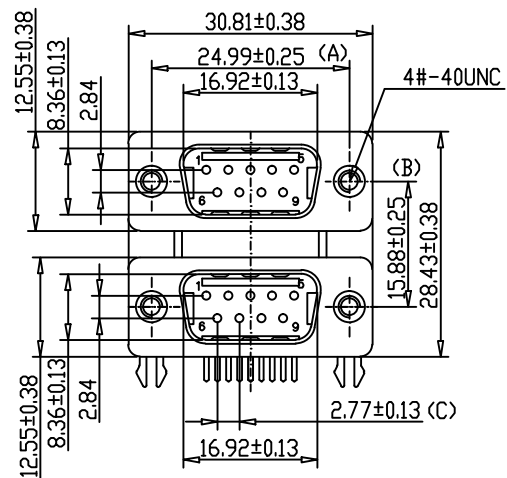


RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(J)

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:1000 Megohms Minimum.at DC 500V.
Contact Resistance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.

Insulator: PBT Or High Temperature Plastic
UL 94V-0 Rated.

Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash Or Full Gold.
Shell:Tin Or Nickel Plated.

B	Add Inspection Dimension		2006.10.20			
A	An issue.		2006.03.02			
REV.	CONTENTS			DATE		Title: D-SUB CONNECTOR 9 MALE/9 MALE DUAL PORT
 UNLESS OTHERWISE SPECIFIED TOLERANCE mm: .00 = ±0.25 .000 = ±0.13 Ang: 0.0 = ±2°	Drawn					
	Designed					
	Approval					
	Scale	1:1	Size	A4		
SHEET	1	Units	mm	File NO.		
				Drawing NO.		