


## GL5539

## Schematic Drawing

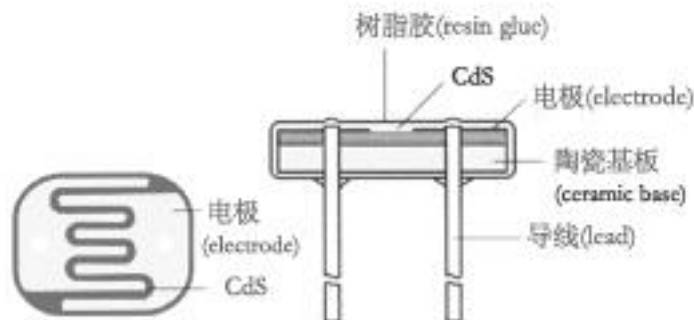

## Performances and Features

Coated with epoxy

Small volume

Quick response

Good reliability

High sensitivity

Good spectrum characteristic

## Typical Applications

Camera automation photometry

Indoor sunlight control

Industrial control

Optical control lamp

Photoelectric control

Annunciator

Optical control switch

Electronic toy

## Standard Type and Specifications

Specification	Type	Maximum Voltage	Maximum power	Environmental temperature	Spectrum peak value
Φ5	GL5539	150	100	-30~+70	540

Specification	Light resistance (10Lux) (KΩ)	Dark resistance (MΩ)	$\gamma_{10}^{100}$	Response time (ms)		Illuminance resistance characteristic
				Increase	Decrease	
Φ5	50-100	5	0.8	20	30	

## Testing Conditions

**Max external voltage:** Maximum voltage to be continuously given to component in the dark.

**Max power consumption:** Maximum power at the environmental temperature 25°C.

**Light resistance** Irradiate by 400-600Lux light for two hours, then test with 10Lux under standard light source A(as colour temperature 2856K)


**Dark resistance** Refer to the resistance value ten seconds after the 10Lux light is shut up.

## Packaging and Notice

1000PCS/ Bag


20000PCS/ Carton

## Main Characteristics Curve and Dimensions

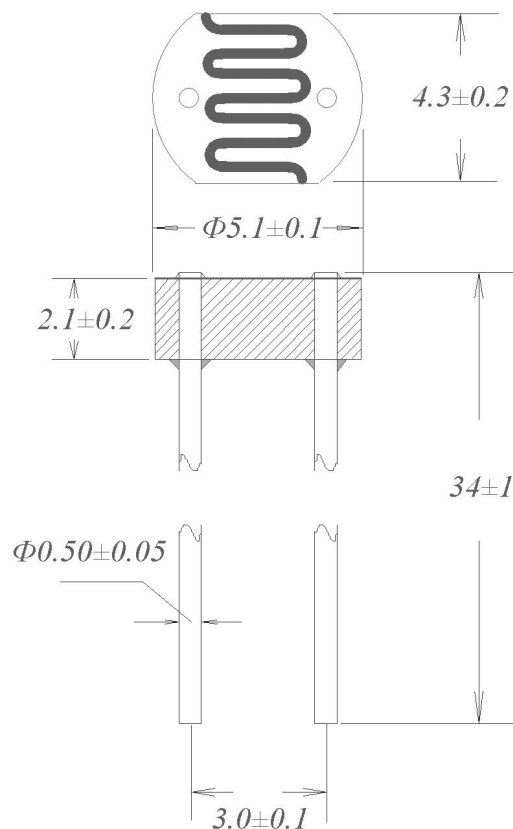

Specification unit: mm


Relative Resistance (%)

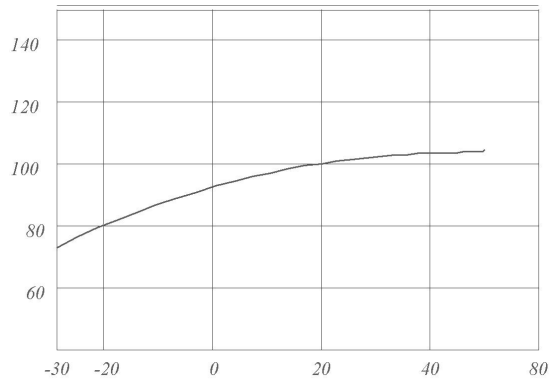

Temperature (°C)

Temperature-Property


Relative Response (%)

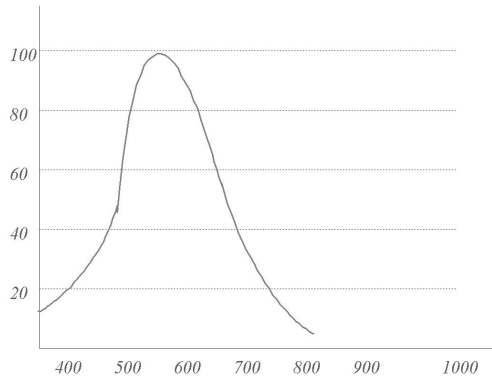

Wavelength λ (nm)

Spectrum Response Characteristic

### Illuminance-Resistance Characteristics Curve

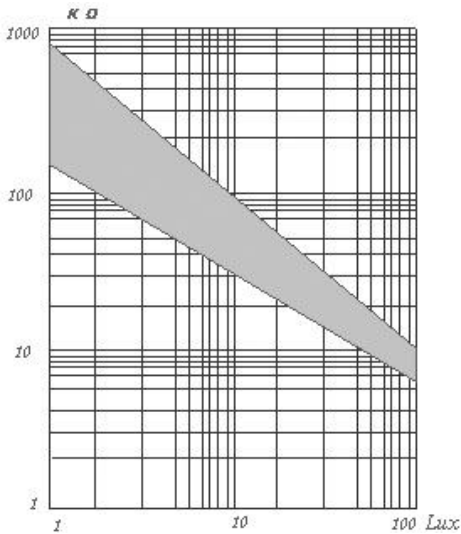

Illuminance -Resistance Curve

### Packing and Precaution

1. This product is packed with the environmental protection material, 100pcs per small package, 1000pcs per big package.
2. Avoid high temperature and humidity for storing.
3. Soldering should be completed in the shortest possible time.
4. It is recommended that the soldering should keep 4mm away from ceramic substrate. If with wave soldering, the furnace temperature shall not be higher than 250°C.



**Senba Sensing Technology Co., Ltd.**

**Add:** 2nd Floor, #D Building, HuaWan Industrial Zone, GuShu, XiXiang Street, Bao'an Dist., ShenZhen City, GuangDong Province, China (518102)

**Tel:** : +86-755-82594732 / 86-16620455140

**Fax:** +86-755-82594762

**Email:** [haily@nysenba.com](mailto:haily@nysenba.com)

**Website:** <http://www.senbasensor.com>