




- ⊙ Φ 22mm Diameter
- ⊙ Switch Rating: Ith:5A, Ui:250V
- ⊙ Contact Configuration: 1NO 1NC
- ⊙ Operation Type(■): Momentary /Latching(Z)
- ⊙ The Crust Material(⊙): Stainless steel(S)Anodized(A)
- ⊙ IP Degree: IP65(IP67 made to order),IK10

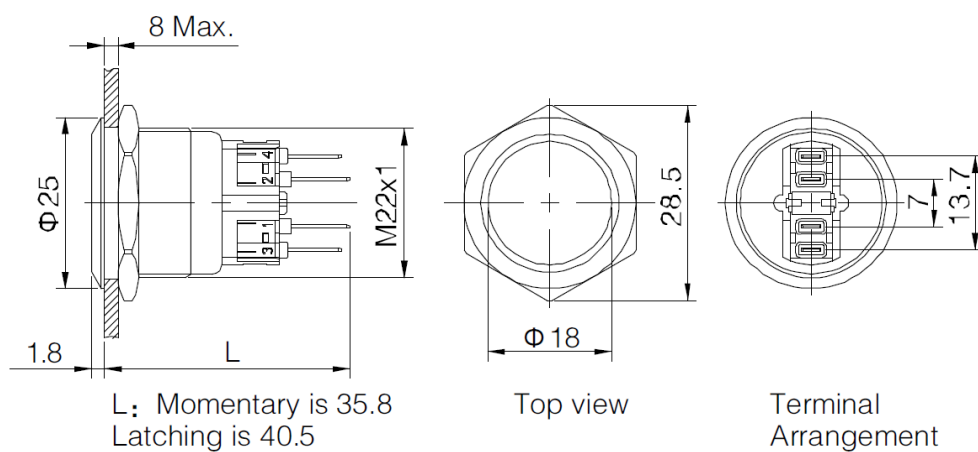

Switching	Za(double-break fast-motion changeover contact)	Material	Button	Stainless steel/Anodized
Panel Thickness	1 ~ 8mm		Body	Stainless steel/Anodized
Mechanical Life	1,000,000 cycles		Base	PA
Electrical Life	50,000 cycles		Operation Pressure	About4N
Terminal Type	Pin Terminal(2.8 × 0.5mm)		Operation Travel	About2.8mm
Torque	1.0Nm		RoHS	Made to order