KTK Series

13/32" x 1-1/2" 600Vac Fast-acting supplemental fuses





600Vac 1/10 to 30A

Description

Fast-acting supplemental fuse.

For superior protection, Bussmann recommends upgrading to Low-Peak Class CC fuses. See data sheet # 1023.

Catalog symbol / color code

· KTK - Black (600Vac maximum voltage)

Ratings

Fuse Amp	Interrupting Rating at Rated Voltage	Agency Information	
Range	600Vac	UL	CSA
1/10 to 30	100kA	Χ	Χ

Agency information

- · CE, RoHS compliant
- UL Listed, Std. 248-14, Guide JDYX, File E19180
- CSA Certified: C22.2 No. 248.14, Class 1422-01, File 53787, HRC-MISC


Catalog numbers (amps)

KTK-1/10	KTK-3/4	KTK-4	KTK-12
KTK-1/8	KTK-1	KTK-5	KTK-15
KTK-2/10	KTK-1-1/4	KTK-6	KTK-20
KTK-1/4	KTK-1-1/2	KTK-7	KTK-25
KTK-3/10	KTK-2	KTK-7-1/2	KTK-30
KTK-4/10	KTK-2-1/2	KTK-8	
KTK-1/2	KTK-3	KTK-9	
KTK-6/10	KTK-3-1/2	KTK-10	

Carton quantity

Amps	Qty.
1/10 to 30	10

Dimensions - in (mm)



Features

- · Color coded black for 600Vac voltage rating
- · Fast-acting for resistive loads
- · Melamine tube construction
- · Nickel-plated bronze endcaps

Typical applications


- · Control circuits
- · Lighting circuit protection
- Meter circuits

Recommended fuse blocks/fuse holders

Series	Description	Data Sheet #				
Blocks						
BMM Series	1-, 2- & 3-Pole modular blocks with optional covers	10235				
BM Series	1-, 2- & 3-Pole blocks	1104				
DIN-Rail Holders / Switches						
CCP30M	1-, 2- & 3-Pole switch	1157				
CHM Series	1-, 2- & 3-Pole	3185				
Optima NG	3-Pole protection module	1109				
Optima	3-Pole holder	1102				
Optima	3-Pole holder + switch	1103				
	Panel Mount Holders					
HPM & HPM-D	1-Pole holder	2112				
HPC-D	1-Pole holder	2109				
HPS2	2-Pole holder	2140				
HPF, HPF-C & HPF-WT	1-Pole holder	2114				
HPS	1-Pole holder	2113				
HPG & HPD	1-Pole holder	2108				
In-line Holders						
HEB	1-Pole holder	2127				
HEX	2-Pole holder	2126				
Fuseclips						
1A3400, 5956 & 5960 Series	PCB Fuseclips	2132				
Fuse Covers						
SAMI-7	Finger-safe fuse cover	1204				

Bussmann
by FAT•N

Time-current characteristic curves - average melt

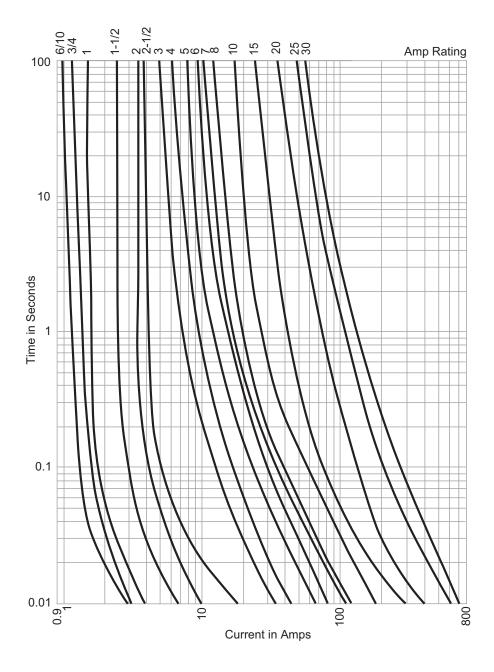


The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



114 Old State Road Ellisville, MO 63021 United States www.Bussmann.com

© 2014 Eaton All Rights Reserved Publication No. 1011 - BU-SB14285 April 2014



All other trademarks are property of their respective owners.

