

KW1-521ABB

DATA SHEET




QC:

ENG:

Prepared By:

Part No.	KW1-521ABB	Spec No.	S/N-050127003D	Page	1 of 4
----------	------------	----------	----------------	------	--------

Package Dimension:

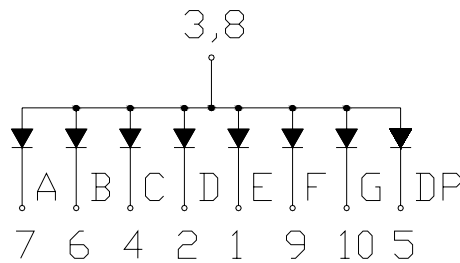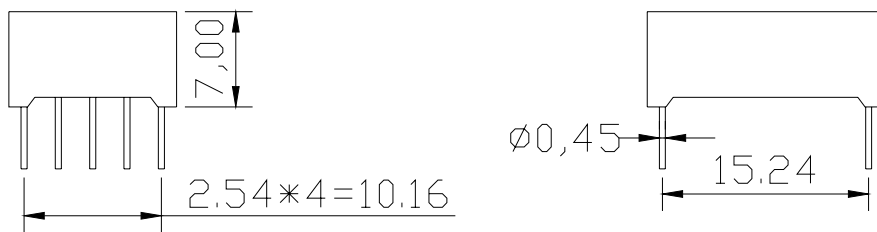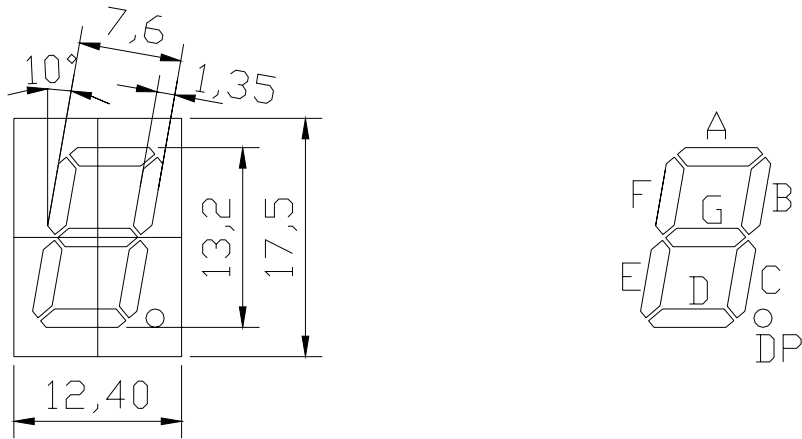

Part NO.	Chip Material	Source Color
KW1-521ABB	GaInN	Blue

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25 (.010)$ mm unless otherwise noted.
3. Specifications are subject to change without notice.

Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	35	mA
Derating Linear From 50	0.4	mA/
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [1.6mm(.063") From Body]	260 for 5 Seconds	

Electrical Optical Characteristics at Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	15	30	45	mcd	I _F =20mA (Note 1)
Peak Emission Wavelength	λ	460	468	472	nm	I _F =20mA
Spectral Line Half-Width		35	40	45	nm	I _F =20mA
Forward Voltage	V _F	3.0	3.5	4.0	V	I _F =20mA
Reverse Current	I _R	---	---	100	μA	V _R =5V

Note:


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

Typical Electrical / Optical Characteristics Curves


Part No.	KW1-521ABB	Spec No.	S/N-050127003D	Page	3 of 4
----------	------------	----------	----------------	------	--------

(25 Ambient Temperature Unless Otherwise Noted)

Spectral Radiance (Peak @ 468nm)

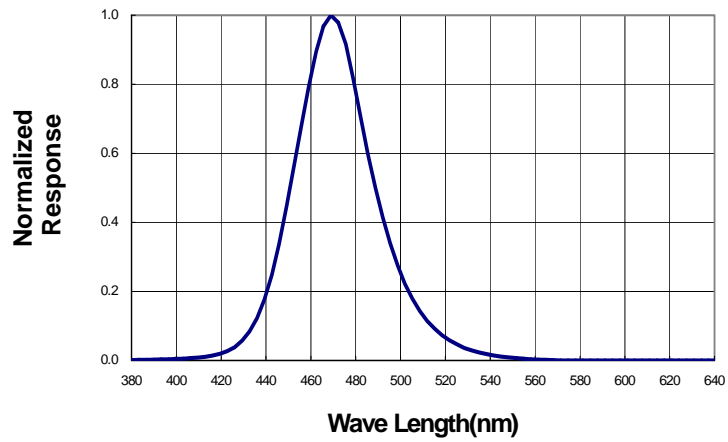

Forward Current vs Forward Voltage

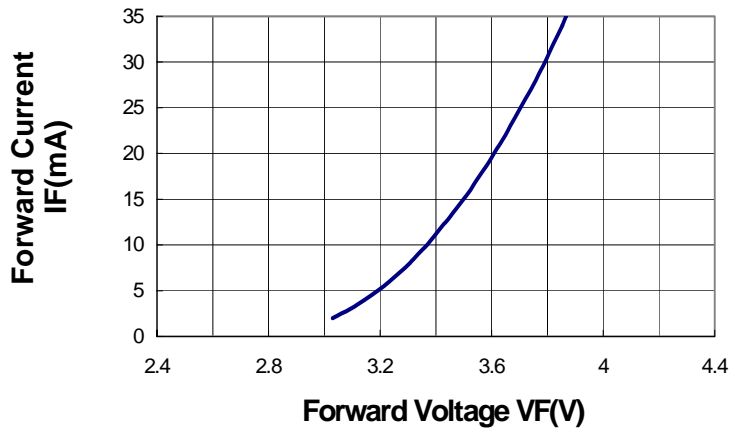

Relative Luminous Intensity vs Forward Current

