

SPECIFICATIONS

Circuit:1,2,3,4,6,9,12,15

Voltage rating:300V AC,DC


Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute


Insulation resistance:1000M Ω HM min

Temperature range:-25 C~+90 C


Material:UL94V-2 nylon 66

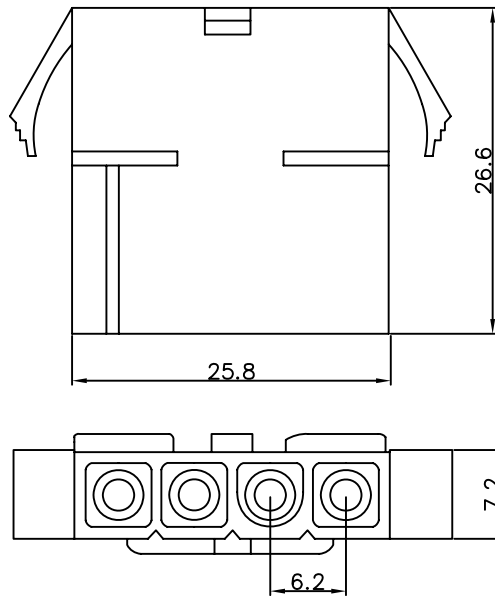

L-PE-1X04

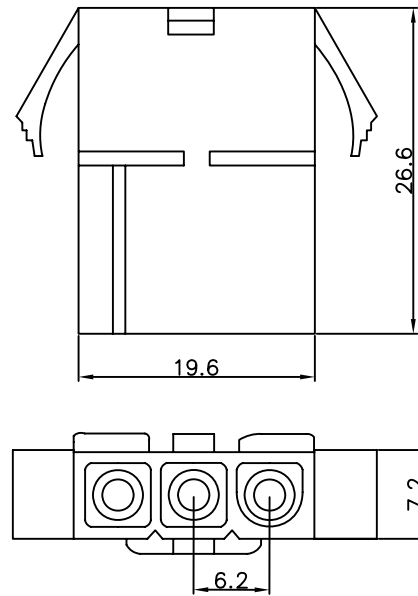

L-PE-1X03

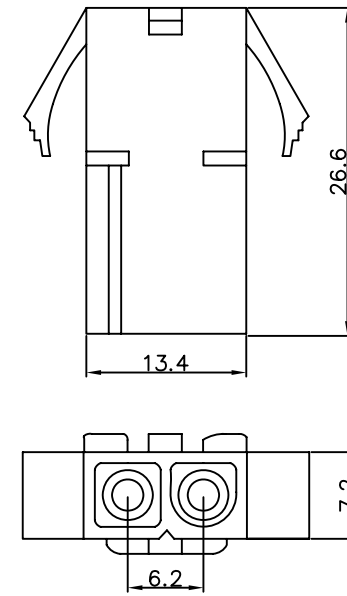

L-PE-1X02



RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

.X, $\pm$

UNIT / mm

SCALE 1 : 1

.XX, $\pm$


DATE

.XXX, $\pm$

SIZE A4

PPOJECTION

ANG, $\pm$



ORDER INFORMATION

L-PE-1Xxx-LF
 SERIES | LEADFREE
 1X02:02 WAY
 1X04:04 WAY
 EAR
 MALE

DESCRIPTION: