
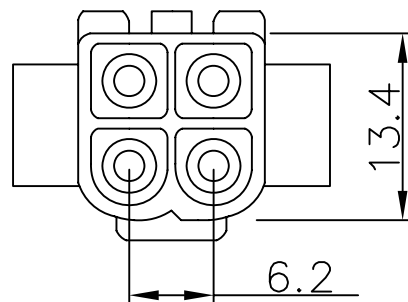
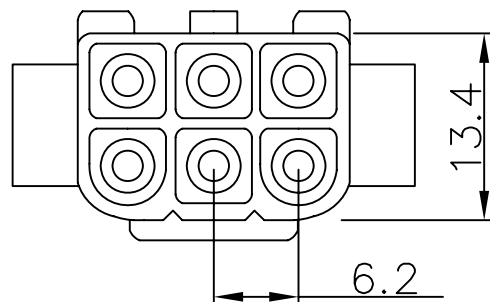
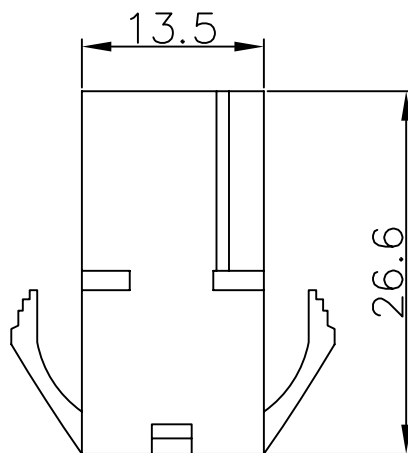


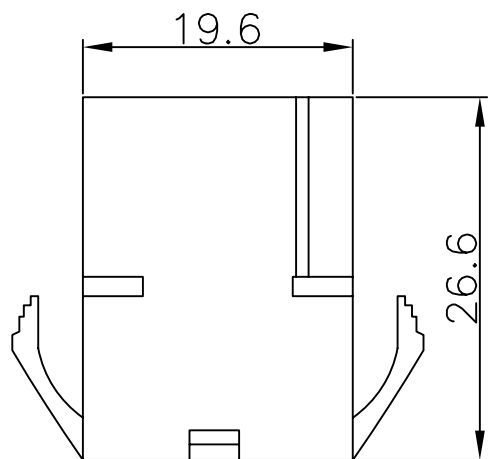

L-PE-2X03

L-PE-2X02

## SPECIFICATIONS

Circuit:1,2,3,4,6,9,12,15

Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M  $\Omega$ HM min

Temperature range:-25 C~+90 C

Material:UL94V-2 nylon 66



**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

X,  $\pm$

CHECKED BY GENIUS

.X,  $\pm$

UNIT / mm

SCALE 1 : 1


.XXX,  $\pm$

DATE

ANG,  $\pm$

SIZE A4

PROJECTION



## ORDER INFORMATION

L-PE-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04 WAY  
 2X03:06 WAY  
 EAR  
 MALE

DESCRIPTION: