


Product data sheet

Specifications

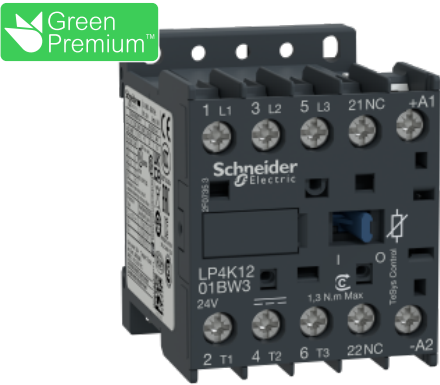

TeSys K contactor, 3P,AC-3, 440V, 12A, 1NC aux, 24V DC coil, low consumption coil, screw clamp terminals

LP4K1201BW3

Main

| | |
|--------------------------------|---|
| Range | TeSys |
| Range of product | TeSys K |
| Product or component type | Contactor |
| Device short name | LP4K |
| Contactor application | Resistive load Motor control |
| Utilisation category | AC-1 AC-4 AC-3 |
| Poles description | 3P |
| Pole contact composition | 3 NO |
| [Ie] rated operational current | 20 A (at <50 °C) at <= 440 V AC AC-1 for power circuit 12 A at <= 440 V AC AC-3 for power circuit 16 A (at <70 °C) at 690 V AC AC-1 for power circuit |
| Auxiliary contact composition | 1 NC |

Complementary

| | |
|--|--|
| Coil technology | Built-in bidirectional peak limiting diode suppressor |
| Auxiliary contacts type | type instantaneous 1 NC |
| Control circuit voltage limits | Operational: 0.7...1.30 Uc (at <50 °C) Drop-out: 0.1...0.7 Uc (at <50 °C) |
| [Ui] rated insulation voltage | Power circuit: 600 V conforming to UL 508 Power circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-5-1 Signalling circuit: 600 V conforming to UL 508 Power circuit: 600 V conforming to CSA C22.2 No 14 Signalling circuit: 600 V conforming to CSA C22.2 No 14 |
| [Uimp] rated impulse withstand voltage | 8 kV |
| Overvoltage category | III |
| Mounting support | Rail Plate |
| Flame retardance | V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102 |
| Tightening torque | 1.3 N.m - on screw clamp terminals - with screwdriver Philips No 2 1.3 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm 1.3 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 |

| | |
|---|---|
| [Ue] rated operational voltage | Power circuit: 690 V AC 50/60 Hz Signalling circuit: <= 690 V AC 50/60 Hz |
| [Ith] conventional free air thermal current | 20 A (at 50 °C) for power circuit 10 A (at 50 °C) for signalling circuit |
| Irms rated making capacity | 110 A AC for signalling circuit conforming to IEC 60947 144 A AC for power circuit conforming to NF C 63-110 144 A AC for power circuit conforming to IEC 60947 |
| Rated breaking capacity | 110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947 |
| Associated fuse rating | 25 A gG at <= 440 V for power circuit 25 A aM for power circuit 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660 |
| Average impedance | 3 mOhm - Ith 20 A 50 Hz for power circuit |
| Inrush power in W | 1.8 W (at 20 °C) |
| Hold-in power consumption in W | 1.8 W at 20 °C |
| Operating time | 10...20 ms coil de-energisation and NO opening 30...40 ms coil energisation and NO closing |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1 |
| Mechanical durability | 30 Mcycles |
| Maximum operating rate | 3600 cyc/h |
| Minimum switching current | 5 mA for signalling circuit |
| Minimum switching voltage | 17 V for signalling circuit |
| Insulation resistance | > 10 MOhm for signalling circuit |
| Height | 58 mm |
| Width | 45 mm |
| Depth | 57 mm |
| Net weight | 0.235 kg |

Environment

| | |
|---------------------------------------|-------------------------|
| Product certifications | UL CSA UKCA |
| Ambient air temperature for operation | -25...50 °C |
| Ambient air temperature for storage | -50...80 °C |
| Operating altitude | 2000 m without derating |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 219.0 g |
| Package 1 Height | 4.8 cm |
| Package 1 width | 6.2 cm |
| Package 1 Length | 6.6 cm |
| Unit Type of Package 2 | P06 |
| Number of Units in Package 2 | 320 |
| Package 2 Weight | 82.22 kg |

| | |
|------------------------------|----------|
| Package 2 Height | 45.0 cm |
| Package 2 width | 80.0 cm |
| Package 2 Length | 60.0 cm |
| Unit Type of Package 3 | S02 |
| Number of Units in Package 3 | 40 |
| Package 3 Weight | 9.192 kg |
| Package 3 Height | 15.0 cm |
| Package 3 width | 30.0 cm |
| Package 3 Length | 40.0 cm |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope) |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|