

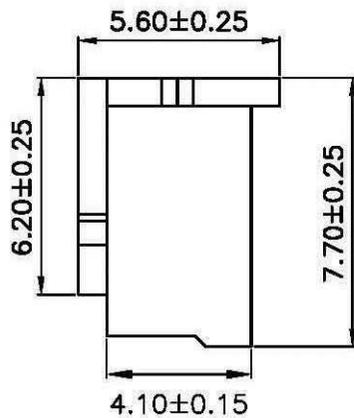
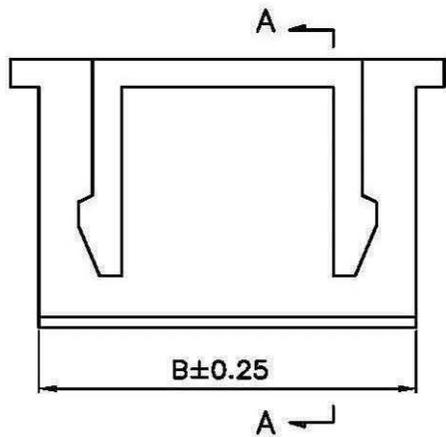


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

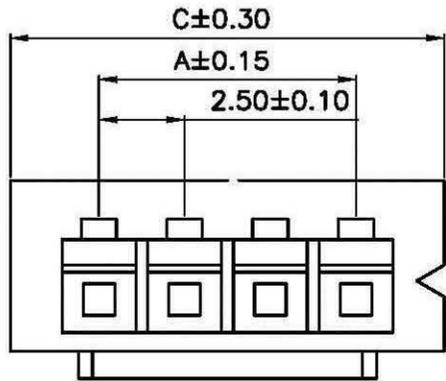

SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Poles: 2-16
 Material: Nylon 66, UL94V-2

NO	DIMENSION		
	A	B	C
02	2.50	5.70	7.30
03	5.00	8.20	9.80
04	7.50	10.70	12.30
05	10.00	13.20	14.80
06	12.50	15.70	17.30
07	15.00	18.20	19.80
08	17.50	20.70	22.30
09	20.00	23.20	24.80
10	22.50	25.70	27.30
11	25.00	28.20	29.80
12	27.50	30.70	32.30
13	30.00	33.20	34.80
14	32.50	35.70	37.30
15	35.00	38.20	39.80
16	37.50	40.70	42.30

						OPERATION	DRAW			SCALE				
						~ 10 ±0.15	DESIGN			UNIT	mm			
						20 ~ 30 ±0.30	CHECK			SIZE	A4			
0		NEW				30 ~ ±0.50	APPROVE			SHEET	1/1		PART NO.	LXH-SXX
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 2°				PROJ.	↔	DRAWING NO.		
						DM TOL								

1 2 3 4 5 6 7 8 9 10