

# RPE-F SERIES


## SPECIFICATIONS

Items	Model		RPE-2003F01/02, RPE-2003F01L/02L	RPE-2006F01/02, RPE-2006F01L/02L
	1	Rated Voltage (AC, DC)	V	250
2	Rated Current (AC, DC) *1	A	3	6
3	Test Voltage (terminals to base plate, 1min AC)	V	1500 at 20±15°C, 65± 20 %	
4	Isolation Resistance (terminals to base plate, 500V DC)	M Ω	100 min. at 20±15°C, 65± 20 %	
5	Leakage Current	250V, 60Hz	mA -20xxF01/02: 0.5 max., -20xxF01/02L: 0.01 max.	
6	DC Resistance (both lines)	m Ω	150	100
7	Temperature Rise	°C	30 max.	
8	Operating Temperature	°C	-25 ~ +85	
9	Operating Humidity	-	15 ~ 85 % RH	
10	Storage Temperature	°C	-25 ~ +85	
11	Storage Humidity	-	5 ~ 85 % RH	
12	Vibration	-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.	
13	Safety Standards *2	-	Compliant with EN60939 (SEMKO) ,UL1283 and CSA C22.2 No.8	
14	Weight	g	70	

### NOTE

\*1 Value for Ta less than 55 °C (include 55 °C)  
 For Ta more than 55 °C (not include 55 °C)  
 According to the derating curve shown on the right.

\*2 Before approval

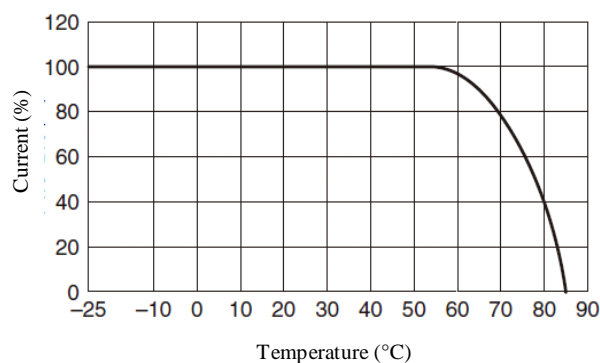

### CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.