

RSEL-AL SERIES

SPECIFICATIONS




RSEL-AL SERIES

SPECIFICATIONS

	Model Items		RSEL-20R5AL	RSEL-2001AL	RSEL-2002AL	RSEL-2003AL	RSEL-2006AL	
1	Rated Voltage (AC, DC)		V	250				
2	Rated Current (AC, DC) *1		A	0.5	1	2	3	6
3	Test Voltage (terminals to base plate, 1min AC)		V	2500 at 20±15°C, 65± 20 %				
4	Isolation Resistance (terminals to base plate, 500V DC)		M Ω	100 min. at 20±15°C, 65± 20 %				
5	Leakage Current	250V, 60Hz	mA	0.01 max.				
6	DC Resistance (both lines)		m Ω	700	600	250	150	80
7	Temperature Rise		°C	30 max.				
8	Operating Temperature		°C	-25 ~ +85				
9	Operating Humidity		-	15 ~ 85 % RH				
10	Storage Temperature		°C	-25 ~ +85				
11	Storage Humidity		-	5 ~ 85 % RH				
12	Vibration		-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.				
13	Safety Standards		-	EN60939 (SEMKO), UL1283, CSA C22.2 No.8				
14	Weight		g	41	41	44	44	44

NOTE

- *1 Value for Ta less than 55 °C (include 55 °C)
For Ta more than 55 °C (not include 55 °C)
According to the derating curve shown on the right.

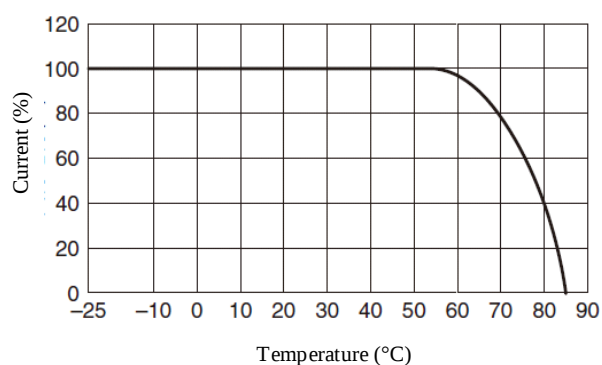

CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RSEL-AL-001 200801