

# **RSEL-2\*\*\*M SERIES**

## **SPECIFICATIONS**




A575NAA-RSEL-M-001 201410

# **RSEL-2\*\*\*M SERIES**

Item	Model		RSEL-20R5M	RSEL-2001M	RSEL-2002M	RSEL-2003M	RSEL-2005M
	1	Rated Voltage (AC, DC)	V	250			
2	Rated Current (AC, DC) *1	A	0.5	1	2	3	5
3	Test Voltage (terminals to base plate, 1min AC)	V	2500 at 20±15°C, 65± 20 %				
4	Isolation Resistance (terminals to base plate, 500V DC)	M Ω	100 min. at 20±15°C, 65± 20 %				
5	Leakage Current	250V, 60Hz	1 max.				
6	DC Resistance (both lines)	Ω	5max.	1.5max.	0.6max.	0.3max.	0.2max.
7	Temperature Rise	°C	30 max.				
8	Operating Temperature	°C	-25 ~ +85				
9	Operating Humidity	-	30 ~ 95 % RH				
10	Storage Temperature	°C	-40 ~ +85				
11	Storage Humidity	-	10 ~ 95 % RH				
12	Vibration	-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.				
13	Safety Standards	-	EN60939 , UL1283 , CSA C22.2 No.8				
14	Weight	g	95	95	95	160	160

## NOTE

- \*1 Value for Ta less than 55 °C (include 55 °C)  
For Ta more than 55 °C (not include 55 °C)  
According to the derating curve shown on the right.

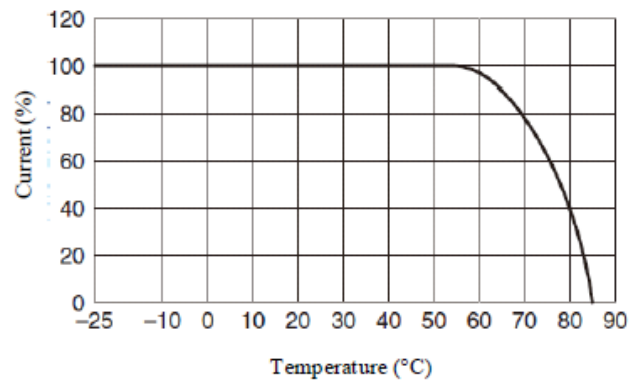

## CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.