

RSKN SERIES

SPECIFICATIONS



A575NAA-RSKN-001 201410


RSKN SERIES

	Model		RSKN-2006	RSKN-2010	RSKN-2020	RSKN-2030	
	Item						
1	Rated Voltage (AC, DC)		V	250			
2	Rated Current (AC, DC) *1		A	6	10	20	30
3	Test Voltage (terminals to base plate, 1min AC)		V	2500 at 20±15°C, 65± 20 %			
4	Isolation Resistance (terminals to base plate, 500V DC)		M Ω	100 min. at 20±15°C, 65± 20 %			
5	Leakage Current	250V, 60Hz	mA	1 max.			
6	DC Resistance (both lines)		Ω	0.3 max.	0.1 max.	0.02 max.	0.01 max.
7	Temperature Rise		°C	35 max.		40 max.	
8	Operating Temperature		°C	-25 ~ +85			
9	Operating Humidity		-	30 ~ 90 % RH			
10	Storage Temperature		°C	-30 ~ +85			
11	Storage Humidity		-	10 ~ 95 % RH			
12	Vibration		-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.			
13	Safety Standards		-	EN60939 , UL1283 , CSA C22.2 No.8			
14	Weight		g	220	310	530	660

NOTE *1


<RSKN-2006 / RSKN-2010>

Value for Ta less than 50 °C (include 50 °C)
For Ta more than 50 °C (not include 50 °C)
According to the derating curve shown on the bellow.

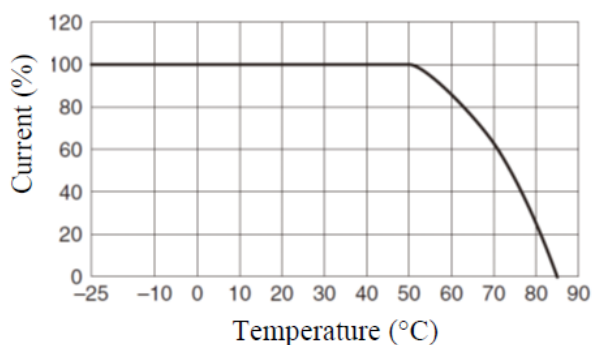

<RSKN-2020 / RSKN-2030>

Value for Ta less than 45 °C (include 45 °C)
For Ta more than 45 °C (not include 45 °C)
According to the derating curve shown on the bellow.

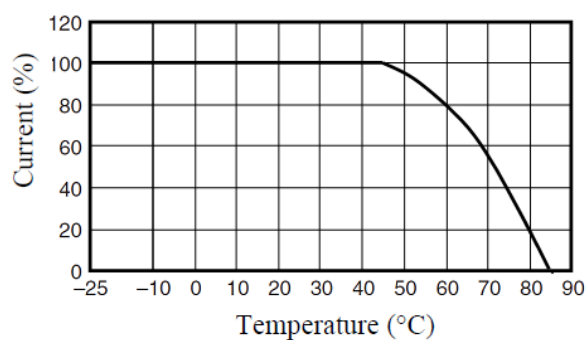

CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RSEL-M-001 201410