



SANKO M35 スプロケット

(単位：mm)




A型 (材質SS400)
酸洗材



新B型 (材質機械構造用炭素鋼)

40Tまでヤキ入鍛造品
B型歯数*印に溝があります。
溝の外径は
9T：16φ
10T：18φ
11T：22φ
12T：24φ
13T：28φ

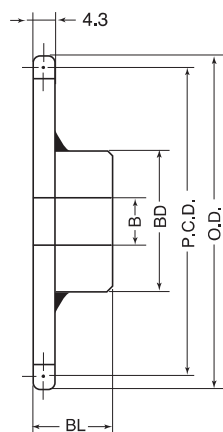

新BW型 (材質SS400)
41T～溶接品

歯数	外径 O.D.	ピッチ径 P.C.D.	歯底円 直径	新B型					A 型	
				軸孔径B		ボス		概略 重量 kg	下孔	概略 重量 kg
				下孔	最大	径B.D	長さB.L			
* 9	32	27.85	22.77	8	11.0	22	20	0.06		0.01
* 10	34	30.82	25.74	8	12.0	25	20	0.08		0.02
* 11	38	33.81	28.73	8	14.0	27	20	0.09		0.03
* 12	40	36.80	31.72	8	17.0	31	20	0.12		0.03
* 13	44	39.80	34.72	9	17.0	32	20	0.12		0.04
14	47	42.80	37.72	9	17.0	30	20	0.12		0.04
15	50	45.81	40.73	9	20.0	35	20	0.16		0.05
16	53	48.82	43.74	9	22.0	37	20	0.19		0.05
17	56	51.84	46.76	11	25.0	41	20	0.22		0.07
18	59	54.85	49.77	11	25.0	44	20	0.25		0.07
19	62	57.87	52.79	11	28.5	47	20	0.28		0.09
20	65	60.89	55.81	11	30	50	20	0.32		0.09
21	68	63.91	58.83	11	32	53	20	0.36		0.11
22	71	66.93	61.85	11	32	53	20	0.37		0.11
23	75	69.95	64.87	11	32	53	20	0.38		0.11
24	78	72.97	67.89	11	32	53	22	0.43		0.14
25	81	76.00	70.92	11	32	53	22	0.44		0.16
26	84	79.02	73.94	11	32	53	22	0.45		0.16
27	87	82.05	76.97	11	32	53	22	0.46		0.17
28	90	85.07	79.99	11	32	53	22	0.48		0.18
29	93	88.10	83.02	11	32	53	22	0.49		0.20
30	96	91.12	86.04	11	32	53	22	0.51		0.23
31	99	94.15	89.07	11	32	53	22	0.52		0.24
32	102	97.18	92.10	11	32	53	22	0.54		0.27
33	105	100.20	95.12	11	32	53	22	0.55		0.28
34	108	103.23	98.15	11	32	53	22	0.57		0.29
35	111	106.26	101.18	11	32	53	22	0.59		0.30
36	114	109.29	104.21	11	32	53	22	0.61		0.32
37	117	112.32	107.24	11	42	63	22	0.82		0.37
38	120	115.34	110.26	11	42	63	25	0.82		0.41
39	123	118.37	113.29	11	42	63	25	0.83		0.42
40	126	121.40	116.32	11	42	63	25	0.85		0.43
41	129	124.43	119.35	12	42	63	25	0.85		0.45
42	132	127.46	122.38	12	42	63	25	0.86		0.47
43	135	130.49	125.41	12	42	63	25	0.87		0.48
44	138	133.52	128.44	12	42	63	25	0.90		0.49
45	142	136.55	131.47	12	42	63	25	0.95		0.50
46	144	139.58	134.50	12	42	63	25	0.96		0.52
47	148	142.61	137.53	12	42	63	25	1.00		0.53
48	151	145.64	140.56	12	42	63	25	1.00		0.55
49	154	148.67	143.59	12	42	63	25	1.04		0.57
50	157	151.69	146.61	12	42	63	25	1.05		0.59
51	160	154.72	149.64	12	42	63	25	1.08		0.60
52	163	157.75	152.67	12	42	63	25	1.11		0.62
53	166	160.78	155.70	12	42	63	25	1.18		0.65
54	169	163.82	158.74	12	42	63	25	1.20		0.68
55	172	166.85	161.77	12	42	63	25	1.22		0.70
56	175	169.88	164.80	12	42	63	25	1.23		0.72
57	178	172.91	167.83	12	42	63	25	1.25		0.75
58	181	175.94	170.86	12	42	63	25	1.27		0.78
59	184	178.97	173.89	12	42	63	25	1.29		0.80
60	187	182.00	176.92	12	42	63	25	1.3		0.87
62	193	188.06	182.98	12	42	63	25			
64	199	194.12	189.04	12	42	63	25			
65	202	197.15	192.07	12	45	68	25	1.5		
66	205	200.18	195.10	12	45	68	25			
68	211	206.24	201.16	12	45	68	25			
70	218	212.30	207.22	12	45	68	25	1.7		
72	223	218.37	213.29	12	45	68	25			
74	229	224.43	219.35	12	45	68	25			
75	233	227.46	222.38	12	45	68	25	1.8		
76	236	230.49	225.41	12	45	68	25			
78	242	236.55	231.47	12	45	68	25			
80	248	242.61	237.53	12	45	68	25			

○上表の着色部分は歯先硬化を施しています。