



SANKO M40 スプロケット

(単位:mm)




A型 (材質SS400)



新B型(材質機械構造用炭素鋼)

35Tまでヤキ入鍛造品
B型歯数*印に溝があります。
溝の外径は
9T : 21φ
10T : 25φ
11T : 30φ
12T : 36φ

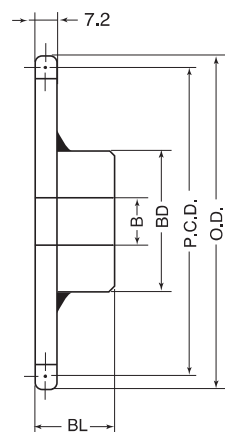

新BW型 (材質SS400)

36T～溶接品

歯 数	外 径 O.D.	ピッチ径 P.C.D.	歯底円 直 径	新B型					A 型	
				軸孔径B		ボ ス		概 略 重 量 kg	下 孔	概 略 重 量 kg
				下孔	最大	径B.D	長さB.L			
* 9	42	37.13	29.18	9	15	28	22	0.11	9	0.04
* 10	46	41.10	33.15	9	18	32	22	0.14	9	0.05
* 11	50	45.08	37.13	10	20	36	22	0.19	10	0.06
* 12	55	49.07	41.12	10	22	40	22	0.22	10	0.10
13	59	53.07	45.12	12	22	37	22	0.23	13	0.10
14	63	57.07	49.12	12	25	42	22	0.28	13	0.11
15	67	61.08	53.13	12	30	46	22	0.34	13	0.15
16	71	65.10	57.15	13	32	50	22	0.40	13	0.17
17	75	69.12	61.17	13	35	54	22	0.46	13	0.20
18	79	73.14	65.19	13	35	57	22	0.51	13	0.20
19	83	77.16	69.21	13	40	62	22	0.59	13	0.20
20	87	81.18	73.23	14	45	67	25	0.76	14	0.26
21	91	85.21	77.26	14	45	71	25	0.85	14	0.30
22	95	89.24	81.29	14	50	75	25	0.95	14	0.30
23	99	93.27	85.32	14	50	77	25	1.0	14	0.35
24	103	97.30	89.35	14	42	63	25	0.81	14	0.37
25	108	101.33	93.38	14	42	63	25	0.88	14	0.40
26	112	105.36	97.41	14	42	63	25	0.92	14	0.45
27	116	109.40	101.45	14	42	63	25	0.96	14	0.50
28	120	113.43	105.48	14	42	63	25	1.0	14	0.51
29	124	117.46	109.51	14	42	63	25	1.1	14	0.51
30	128	121.50	113.55	14	42	63	25	1.1	14	0.60
31	132	125.53	117.58	14	45	63	25	1.2	14	0.61
32	136	129.57	121.62	14	45	68	28	1.3	14	0.68
33	140	133.61	125.66	14	45	68	28	1.3	14	0.70
34	145	137.64	129.69	14	45	68	28	1.3	14	0.75
35	149	141.68	133.73	14	45	68	28	1.4	14	0.83
36	153	145.72	137.77	17	45	68	28	1.4	17	0.90
37	157	149.75	141.80	17	45	68	28	1.5	17	0.93
38	161	153.79	145.84	17	45	68	28	1.5	17	0.95
39	165	157.83	149.88	17	45	68	28	1.6	17	1.05
40	169	161.87	153.92	17	45	68	28	1.6	17	1.06
41	173	165.91	157.96	17	45	73	32	1.7	17	1.15
42	177	169.94	161.99	17	48	73	32	2.0	17	1.20
43	181	173.98	166.03	17	48	73	32	2.1	17	1.23
44	185	178.02	170.07	17	48	73	32	2.2	17	1.30
45	189	182.06	174.11	17	48	73	32	2.2	17	1.36
46	193	186.10	178.15	17	48	73	32	2.3	17	1.40
47	197	190.14	182.19	17	48	73	32	2.3	17	1.50
48	201	194.18	186.23	17	48	73	32	2.3	17	1.53
49	205	198.22	190.27	17	48	73	32	2.3	17	1.65
50	209	202.26	194.31	17	48	73	32	2.4	17	1.70
51	214	206.30	198.35	17	48	73	32	2.5	17	1.71
52	218	210.34	202.39	17	48	73	32	2.6	17	1.80
53	222	214.38	206.43	17	48	73	32	2.7	17	1.90
54	226	218.42	210.47	17	48	73	32	2.8	17	2.00
55	230	222.46	214.51	17	48	73	32	2.9	17	2.15
56	234	226.50	218.55	17	48	73	32	3.0	17	2.17
57	238	230.54	222.59	17	48	73	32	3.0	17	2.25
58	242	234.58	226.63	17	48	73	32	3.1	17	2.30
59	246	238.62	230.67	17	48	73	32	3.2	17	2.40
60	250	242.66	234.71	17	48	73	32	3.2	17	2.50
62	258	250.74	242.79	17	48	73	32	3.5	17	2.70
64	266	258.83	250.88	17	48	73	32	3.7	17	2.80
65	270	262.87	254.92	17	55	83	32	3.9	17	2.87
66	274	266.91	258.96	17	55	83	32		17	2.95
68	282	274.99	267.04	17	55	83	32		17	3.15
70	290	283.07	275.12	19	55	83	32	4.3	19	3.30
72	299	291.15	283.20	19	55	83	32		19	3.40
74	307	299.24	291.29	19	55	83	32		19	
75	311	303.28	295.33	19	55	83	32	4.8	19	4.50
76	315	307.32	299.37	19	55	83	32	5.00	19	
78	323	315.40	307.45	19	55	83	32	5.10	19	
80	331	323.49	315.54	19	60	87	35	5.90	19	5.50
85	351	343.69	335.74	19	60	87	35	6.50	19	
90	371	363.90	355.95	19	60	87	35	7.15	19	6.00

○上表の着色部分は歯先硬化を施しています。