



SANKO M50 スプロケット

(単位: mm)



A型 (材質SS400)



新B型 (材質機械構造用炭素鋼)

35Tまでヤキ入鍛造品
B型歯数*印に溝があります。
溝の外径は


9T : 27φ

10T : 32φ

11T : 37φ

12T : 42φ

13T : 47φ

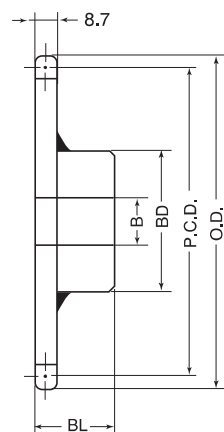

新BW型 (材質SS400)

36T～溶接品

歯数	外径 O.D.	ピッチ径 P.C.D.	歯底円 直径	B型					A型	
				軸孔径B		ボス		概略 重量 kg	下孔	概略 重量 kg
				下孔	最大	径B.D	長さB.L			
* 9	53	46.42	36.26	10	19	34	25	0.20	10	0.08
* 10	58	51.37	41.21	10	25	40	25	0.27	10	0.11
* 11	63	56.35	46.19	12	25	45	25	0.33	13	0.15
* 12	68	61.34	51.18	12	32	50	25	0.41	13	0.18
* 13	73	66.33	56.17	12	32	51	25	0.46	13	0.18
14	79	71.34	61.18	12	35	52	25	0.52	13	0.20
15	84	76.35	66.19	12	38	57	25	0.62	13	0.26
16	89	81.37	71.21	13	40	62	25	0.72	13	0.30
17	94	86.39	76.23	13	45	67	25	0.83	13	0.35
18	99	91.42	81.26	13	47	72	28	1.0	13	0.40
19	104	96.45	86.29	13	47	73	28	1.1	13	0.44
20	109	101.48	91.32	14	47	73	28	1.2	14	0.50
21	114	106.51	96.35	14	47	73	28	1.2	14	0.54
22	119	111.55	101.39	16	47	73	28	1.3	16	0.59
23	124	116.59	106.43	16	47	73	28	1.3	16	0.65
24	129	121.62	111.46	16	47	73	28	1.4	16	0.70
25	134	126.66	116.50	16	47	73	28	1.5	16	0.80
26	139	131.70	121.54	16	48	73	28	1.5	16	0.85
27	144	136.74	126.58	16	48	73	28	1.5	16	0.90
28	149	141.79	131.63	16	48	73	28	1.6	16	1.00
29	154	146.83	136.67	16	48	73	28	1.6	16	1.10
30	160	151.87	141.71	16	48	73	28	1.7	16	1.15
31	165	156.92	146.76	16	48	73	28	1.8	16	1.20
32	170	161.96	151.80	16	48	73	28	1.8	16	1.26
33	175	167.01	156.85	16	48	73	28	1.9	16	1.35
34	180	172.05	161.89	16	48	73	28	2.1	16	1.45
35	185	177.10	166.94	16	48	73	28	2.2	16	1.55
36	191	182.15	171.99	19	55	83	35	2.7	19	1.67
37	196	187.19	177.03	19	55	83	35	2.8	19	1.80
38	201	192.24	182.08	19	55	83	35	2.9	19	1.85
39	206	197.29	187.13	19	55	83	35	2.9	19	2.00
40	211	202.33	192.17	19	55	83	35	3.1	19	2.05
41	216	207.38	197.22	19	55	83	35	3.2	19	2.12
42	221	212.43	202.27	19	55	83	35	3.3	19	2.30
43	226	217.48	207.32	19	55	83	35	3.4	19	2.43
44	231	222.53	212.37	19	55	83	35	3.5	19	2.60
45	237	227.58	217.42	19	55	83	35	3.6	19	2.60
46	242	232.63	222.47	19	55	83	35	3.8	19	2.70
47	247	237.68	227.52	19	55	83	35	3.9	19	2.90
48	252	242.73	232.57	19	55	83	35	4.0	19	3.00
49	257	247.78	237.62	19	55	83	35	4.1	19	3.15
50	262	252.82	242.66	19	55	83	35	4.3	19	3.30
51	267	257.87	247.71	19	55	83	35	4.4	19	3.40
52	272	262.92	252.76	19	55	83	35	4.6	19	3.50
53	277	267.97	257.81	19	55	83	35	4.7	19	3.70
54	282	273.03	262.87	19	55	83	35	4.8	19	3.90
55	287	278.08	267.92	19	55	83	35	4.9	19	4.00
56	292	283.13	272.97	19	55	83	35	5.1	19	4.20
57	297	288.18	278.02	19	55	83	35	5.2	19	4.35
58	302	293.23	283.07	19	55	83	35	5.4	19	4.50
59	307	298.28	288.12	19	55	83	35	5.5	19	4.65
60	312	303.33	293.17	19	55	83	35	5.6	19	4.80
62	323	313.43	303.27	19	55	83	35		19	
64	333	323.53	313.37	19	55	83	35		19	5.65
65	338	328.58	318.42	19	63	93	40	6.9	19	5.80
66	343	333.64	323.48	19	63	93	40		19	
68	353	343.74	333.58	19	63	93	40		19	6.10
70	363	353.84	343.68	20	63	93	40	7.7	20	6.35
72	373	363.94	353.78	20	63	93	40		20	6.60
74	383	374.05	363.89	20	63	93	40		20	
75	388	379.10	368.94	20	63	93	40	8.6	20	7.00
76	393	384.15	373.99	20	63	93	40		20	
78	403	394.25	384.09	20	63	93	40		20	
80	414	404.36	394.20	20	63	93	40		20	8.46
85	439	429.62	419.46	20	63	93	40		20	
90	464	454.88	444.72	20	63	93	40		20	9.50

○上表の着色部分は歯先硬化を施しています。