



SANKO M60 スプロケット

(単位：mm)




A型 (材質SS400)



新B型 (材質機械構造用炭素鋼)

30Tまでヤキ入鍛造品
B型歯数*印に溝があります。
溝の外径は
9T：32φ
10T：37φ
11T：45φ

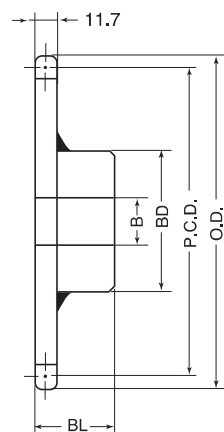

新BW型 (材質SS400)

31T～溶接品

歯数	外径 O.D.	ピッチ径 P.C.D.	歯底円 直径	新B型					A型	
				軸孔径B		ボス		概略 重量 kg	下孔	概略 重量 kg
				下孔	最大	径B.D	長さB.L			
* 9	63	55.70	43.79	10	24	42	32	0.40	10	0.17
* 10	70	61.65	49.74	14	30	49	32	0.49	10	0.20
* 11	76	67.62	55.71	14	32	51	32	0.60	14	0.26
12	82	73.60	61.69	14	35	51	32	0.69	14	0.30
13	88	79.60	67.69	14	38	57	32	0.81	14	0.37
14	94	85.61	73.70	16	40	62	32	0.96	16	0.43
15	101	91.63	79.72	16	45	68	32	1.1	16	0.51
16	107	97.65	85.74	16	50	73	32	1.3	16	0.60
17	113	103.67	91.76	16	50	73	32	1.4	16	0.68
18	119	109.70	97.79	16	55	83	40	2.0	16	0.75
19	125	115.74	103.83	16	55	83	40	2.1	16	0.88
20	131	121.78	109.87	16	55	83	40	2.2	16	0.96
21	137	127.82	115.91	16	55	83	40	2.3	16	1.10
22	143	133.86	121.95	16	55	83	40	2.4	16	1.15
23	149	139.90	127.99	16	55	83	40	2.5	16	1.20
24	155	145.95	134.04	16	55	83	40	2.5	16	1.40
25	162	151.99	140.08	16	55	83	40	2.7	16	1.51
26	168	158.04	146.13	16	55	83	40	2.9	16	1.65
27	174	164.09	152.18	16	55	83	40	3.0	16	1.70
28	180	170.14	158.23	16	55	83	40	3.1	16	1.90
29	186	176.19	164.28	16	55	83	40	3.3	16	2.05
30	193	182.25	170.34	18	55	83	40	3.4	20	2.25
31	199	188.30	176.39	20	55	83	40	3.5	20	2.40
32	205	194.35	182.44	20	55	83	40	3.7	20	2.55
33	211	200.41	188.50	20	55	83	40	3.8	20	2.70
34	217	206.46	194.55	20	55	83	40	4.0	20	2.90
35	223	212.52	200.61	20	55	83	40	4.2	20	3.12
36	229	218.57	206.66	20	55	83	40	4.4	20	3.21
37	235	224.63	212.72	20	55	83	40	4.6	20	3.45
38	241	230.69	218.78	20	55	83	40	4.8	20	3.56
39	248	236.74	224.83	20	55	83	40	4.9	20	3.83
40	253	242.80	230.89	20	55	83	40	5.1	20	4.05
41	260	248.86	236.95	20	63	93	45	5.5	20	4.22
42	266	254.92	243.01	20	63	93	45	6.0	20	4.37
43	272	260.98	249.07	20	63	93	45	6.2	20	4.61
44	278	267.03	255.12	20	63	93	45	6.4	20	4.89
45	284	273.09	261.18	20	63	93	45	6.7	20	5.10
46	290	279.15	267.24	20	63	93	45	6.8	20	5.25
47	296	285.21	273.30	20	63	93	45	7.1	20	5.50
48	302	291.27	279.36	20	63	93	45	7.4	20	5.75
49	308	297.33	285.42	20	63	93	45	7.6	20	6.00
50	314	303.39	291.48	20	63	93	45	7.8	20	6.25
51	321	309.45	297.54	20	63	93	45	8.0	20	6.50
52	327	315.51	303.60	20	63	93	45	8.4	20	6.84
53	333	321.57	309.66	20	63	93	45	8.6	20	
54	338	327.63	315.72	20	63	93	45	8.8	20	7.25
55	345	333.69	321.78	20	63	93	45	9.2	20	7.65
56	351	339.75	327.84	20	63	93	45	9.5	20	
57	357	345.81	333.90	20	63	93	45		20	8.10
58	363	351.87	339.96	20	63	93	45		20	8.73
59	369	357.93	346.02	20	63	93	45		20	
60	375	363.99	352.08	20	63	93	45	10.6	20	9.00
62	387	376.12	364.21						20	
64	399	388.24	376.33			93	45		20	
65	405	394.30	382.39	20	75	107	45	12.8	20	10.60
66	411	400.36	388.45	20	75	107	45		20	
68	423	412.49	400.58	20	75	107	45		20	
70	436	424.61	412.70	20	75	107	45	14.4	20	12.20
72	448	436.73	424.82	20	75	107	45		20	12.50
74	460	448.86	436.95	20	75	107	45		20	
75	466	454.92	443.01	20	75	107	45	16.30	20	13.00
76	472	460.98	449.07						20	14.00
80	496	485.23	473.32	30					30	15.90
85	527	515.54	503.63	30					30	
90	557	545.85	533.94	30					30	18.30

○上表の着色部分は歯先硬化を施しています。