

#### NCU18XH103F6SRB














#### Appearance & Shape










- 1. Excellent solderability and high stability in environment
- 2. Excellent long time aging stability
- 3. High accuracy in resistance and B-constant
- 4. Flow / Reflow soldering possible



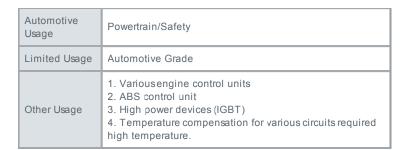



Packaging	Specifications	Minimum Order Quantity
RB	180mm Paper Tape	4000

1 of 3

#### Attention



URL: http://www.murata.com/



## NCU18XH103F6SRB

# Specifications

Resistance (25°C)	10kΩ
Resistance Value Tolerance (at 25°C)	±1%
B-Constant (25/50°C)	3380K
B-Constant (25/50°C) Tolerance	±1%
B-Constant(25/80°C)(Reference Value)	3428K
B-Constant(25/85°C)(Reference Value)	3434K
B-Constant(25/100°C)(Reference Value)	3455K
Permissive Operating Current (25°C)	0.31mA
Rated Electric Power (25°C)	100.0mW
Typical Dissipation Constant (25°C)	1mW/℃
Operating Temperature Range	-40°C to 150°C
Size Code (in mm)	1.6x0.8mm
Size Code (in inch)	0.6x0.3inch
Shape	SMD
Mass	0.0047g


2 of 3





## NCU18XH103F6SRB



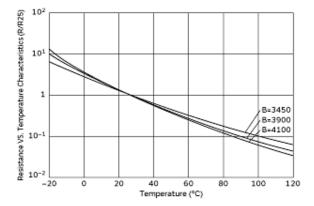

Resistance-Temperature Characteristics

3 of 3

