
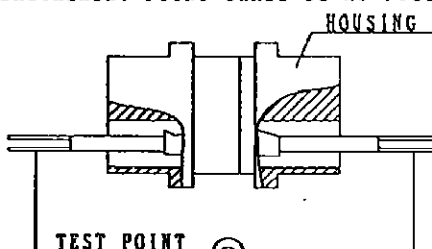



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
APPLICABLE STANDARD									
RATING	OPERATING TEMPERATURE RANGE	-10℃ TO 60℃			STORAGE TEMPERATURE RANGE	℃ TO ℃			
	VOLTAGE	V			CURRENT	A 			
	APPLICABLE CABLE								
SPECIFICATIONS									
ITEM		TEST METHOD			REQUIREMENTS			QT	AT
CONSTRUCTION									
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING.			○	○
MARKING		CONFIRMED VISUALLY.						○	○
ELECTRICAL CHARACTERISTICS									
CONTACT RESISTANCE		1 A (DC OR 1000 Hz). MEASUREMENT POINT SHALL BE AS FOLLOWS.			10 mΩ MAX.				
		 <p>(ONE EXAMPLE OF CONNECTOR CONFIGURATION IS SHOWN.)</p>						○	○
MECHANICAL CHARACTERISTICS									
MECHANICAL OPERATION		1000 TIMES INSERTIONS AND EXTRACTIONS			① CONTACT RESISTANCE: 20 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			○	-
ENVIRONMENTAL CHARACTERISTICS									
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -50 → 5 TO 35 → 85 → 5 TO 35 ℃ TIME 30 → 5 MAX. → 30 → 5 MAX. min UNDER 5 CYCLES.			① NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			○	-
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			① CONTACT RESISTANCE: 20 mΩ MAX. ② NO HEAVY CORROSION.			○	-
REMARKS  AS PER FORROWING TABLE-1.									
Unless otherwise specified, refer to JIS C 5402.				DRAWN J. Watanabe '95.8.3		DESIGNED J. Watanabe '95.8.3		CHECKED H. Miwa '95.8.3	
				APPROVED S. Watanabe '95.8.4		RELEASED			
Note QT: Qualification Test AT: Assurance Test ○: Applicable Test									
HRS HIROSE ELECTRIC CO., LTD.				SPECIFICATION SHEET			PART NO. QR/P-XC-111(12)		
CODE NO. (OLD) CL		DRAWING NO. ELC4-08217 -03			CODE NO. CL221-0009-2-12			1/1	

T0
Q2