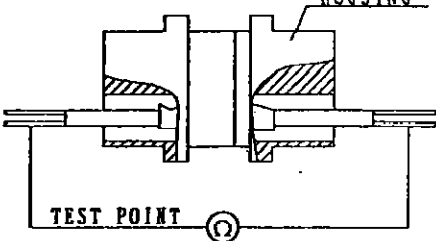


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
APPLICABLE STANDARD									
RATING	OPERATING TEMPERATURE RANGE	-10 ℃ TO 60 ℃			STORAGE TEMPERATURE RANGE	℃ TO ℃			
	VOLTAGE	V			CURRENT	A ☐ ☒			
	APPLICABLE CABLE								
SPECIFICATIONS									
ITEM		TEST METHOD			REQUIREMENTS			QT	AT
CONSTRUCTION									
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING.			☐	☐
MARKING		CONFIRMED VISUALLY.						☐	☐
ELECTRICAL CHARACTERISTICS									
CONTACT RESISTANCE		1 A (DC OR 1000 Hz). MEASUREMENT POINT SHALL BE AS FOLLOWS.			10 mΩ MAX.			☐	☐
		 TEST POINT (ONE EXAMPLE OF CONNECTOR CONFIGURATION IS SHOWN.)						☐	☐
MECHANICAL CHARACTERISTICS									
MECHANICAL OPERATION		1000 TIMES INSERTIONS AND EXTRACTATIONS			① CONTACT RESISTANCE: 20 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			☐	-
ENVIRONMENTAL CHARACTERISTICS									
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -50 → 5 TO 35 → 85 → 5 TO 35 ℃ TIME 30 → 5 MAX. → 30 → 5 MAX. min UNDER 5 CYCLES.			① NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			☐	-
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			① CONTACT RESISTANCE: 20 mΩ MAX. ② NO HEAVY CORROSION.			☐	-
REMARKS ☒ AS PER FORROWING TABLE-1.									
Unless otherwise specified, refer to JIS C 5402.				DRAWN		DESIGNED		CHECKED	
				J. Watanabe '95.8.3		J. Watanabe '95.8.3		H. Miura 95.8.3	
				APPROVED		RELEASED			
				95.8.4					
Note QT: Qualification Test AT: Assurance Test ○: Applicable Test									
HRS HIROSE ELECTRIC CO., LTD.				SPECIFICATION SHEET			PART NO.		
							QR/P-XC-121 (12)		
CODE NO. (OLD)		DRAWING NO.			CODE NO.				
CL		ELC4-08218 -03			CL221-0010 -1-12			1/1	

T0

Q2