



RIGHT ANGLE FEMALE PCB RECEPTACLES (captive center contact)

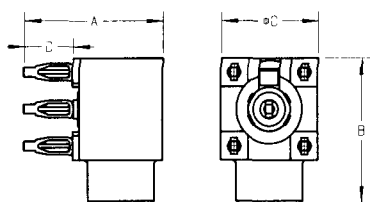



Fig. 1

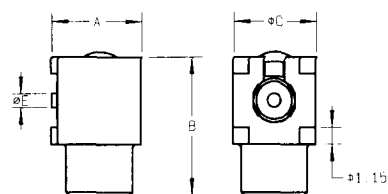


Fig. 2

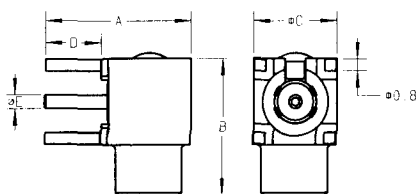


Fig. 3





Fig. 4

part number	fig.	imp. (Ω)	dimensions (mm)					mounting	PCB	finish	note
			A	B	C	D	E				
R113 661 000	1	50	10	10	7	3.5		M 06	P 04	Gold	Press-fit PCB mount
R113 661 020	1	50	10	10	7	3.5		M 06	P 04	Nickel	Press-fit PCB mount
R113 661 027	1	50	10	10	7	3.5		M 06	P 04	BBR	Press-fit PCB mount
R113 664 000	2	50	6.5	9.5	6		0.98	M 12		Gold	SMT
R113 664 100	2	50	6.5	9.5	6		0.98	M 12		Gold	SMT / reel 100 pieces
R113 664 120	2	50	6.5	9.5	6		0.98	M 12		Gold	SMT / reel 500 pieces
R113 665 000	3	50	10.5	9.5	6	4	0.98		P 05	Gold	
R113 665 010●	3	50	10	9.35	6	4	0.98		P 05	Gold	
R113 665 020	3	50	10.5	9.5	6	4	0.98		P 05	BBR	
R113 665 037	3	50	9.5	9.5	6	3	0.98		P 05	BBR	Packaging : 100 pieces
R113 665 110●	3	50	11.5	9.5	6	2.5	0.98		P 05	Gold	
R113 665 127●	3	50	10.5	9.5	6	4	0.98		P 05	BBR+tin lead	Packaging : 100 pieces
R113 665 137●	3	50	9.5	9.5	6	3	0.98		P 05	BBR+tin lead	Packaging : 100 pieces
R113 666 000	4	50	9	9.4	6	3	0.5		P 06	Gold	Space saving pattern
R113 666 020	4	50	9	9.4	6	3	0.5		P 06	BBR	Space saving pattern
R213 665 000●	3	75	10.5	9.5	6	4	0.83		P 05	Gold	

DEMONSTRATION BOARDS



part number	imp. (Ω)
R113 900 520	50
R213 900 520	75

Including straight and right angle through holes and SMT pins receptacles.

● Upon request.