

PRECISION TYPE METAL CLAD RESISTORS

RH / RHF

Features :

- Ideal for current sensing application.
- Small size, high power and ultra precise resistors.
- Ultra precise resistors in low resistance value are available.
- Low temperature coefficient.
- Strongly resistant to moisture, Solvent, Dielectric Strength, and Insulation.


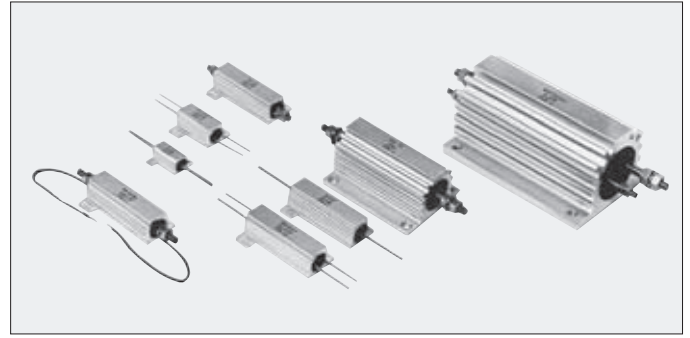


Fig. 1


Type	Wattage Rating (W)		Terminal	Resistance Range (Ω)						Maximum Resistance (Ω)	Maximum Current Running (A)	Dielectric Strength (V)	MAX WORKING (V) 1min.
	Chassis Mounted*	Free Air		Resistance Tolerance Minimum Resistance (Ω)									
				±1% (F)	±0.5% (D)	±0.1% (B)	±0.05% (A)	±0.02% (Q)	±0.01% (T)				
RH-10E4	4	2	4	0.02~	0.02~	0.05~	0.1~	0.2~	—	1	14	1000	AC300
RH-25E4	6	3	4	0.01~	0.01~	0.03~	0.05~	0.1~	—	1	24	1000	AC400
RH-50E4	10	4	4	0.01~	0.01~	0.02~	0.05~	0.1~	—	1	25	2000	AC1300
RH-50ML	10	4	4	0.001~	0.005~	0.01~	0.02~	0.05~	—	1	100	2000	AC1300
RH-75ML	20	8	4	0.001~	0.001~	0.001~	0.005~	0.01~	1	1	140	4500	AC1300
RH-100ML	30	12	4	0.001~	0.001~	0.001~	0.005~	0.01~	1	1	170	4500	AC1400
RH-100M4	30	12	4	0.001~	0.001~	0.001~	0.005~	0.01~	—	0.5	170	4500	AC1400
RH-250ML	50	20	4	0.001~	0.001~	0.001~	0.005~	0.01~	1	1	200	4500	AC1700
RH-250M4	50	20	4	0.001~	0.001~	0.001~	0.005~	0.01~	—	0.5	200	4500	AC1700
RH-5E	2	1	2	0.02~	0.1~	1~	2~	20~	30~	150K	10	500	AC300
RH-10E	4	2	2	0.02~	0.1~	0.3~	1~	10~	20~	300K	14	1000	AC300
RH-25E	6	3	2	0.02~	0.1~	0.5~	1~	10~	20~	600K	17	1000	AC400
RH-50E	10	4	2	0.02~	0.1~	0.5~	1~	10~	20~	3M	22	2000	AC1300
RH-50M	10	4	2	0.01~	0.05~	0.3~	0.5~	—	—	2M	31	2000	AC1300
RH-75M	20	8	2	0.01~	0.05~	0.3~	0.5~	10~	20~	150K	44	4500	AC1300
RH-100M	30	12	2	0.01~	0.05~	0.1~	0.3~	10~	20~	350K	50	4500	AC1400
RH-250M	50	20	2	0.01~	0.05~	0.1~	0.3~	40~	20~	600K	70	4500	AC1700

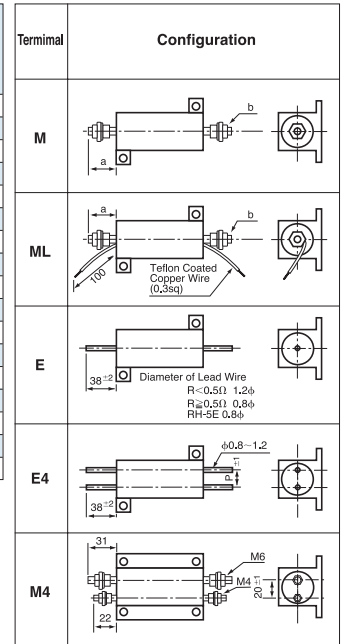

*On Test Chassis Mounted

RH(F)-5~RH(F)-50

RH(F)-75~RH(F)-250

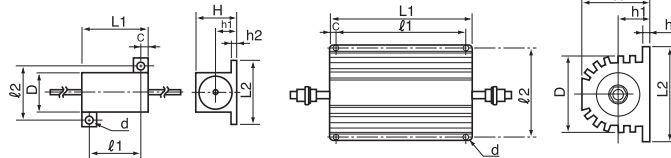


Test Chassis Dimensions

- RH(F)-5 · 10 152×102×51×1t
- RH(F)-25 · 50 178×127×51×1t
- RH(F)75~250 305×305×3t

Type	Dimensions (mm)											Weight (g)	
	L1±1	L2±0.8	ℓ1±0.8	ℓ2±0.8	D±1	H±0.8	d±0.3	c±0.8	h1±1	h2±0.5	a±2		b
RH-5E	15.3	16.4	11.3	12.5	8.5	8	2.3	2	4	1.6	—	—	3
RH-10E	19	20	14.3	15.9	10.8	10	2.4	2.4	5.3	2.4	—	—	5
RH-25E	27	28	18.3	19.8	13.5	14	3.2	4.4	7.1	2.4	—	—	6
RH-50E	49.2	29.2	39.7	21.4	15.1	16	3.2	4.8	8	2.5	13	M4	7
RH-75E	66	52	56	42	32	33	4.8	5	16	3.2	22	M5	—
RH-100E	88.9	71.4	69.9	57.2	46	44.5	4.8	9.5	19.5	4.8	25	M6	—
RH-250E	114.3	76.2	98.4	63.5	54	55.6	4.8	7.9	25.4	6.4	31	M6	—

Operating Temp. - 55°C~+125°C




Temp. Coefficient


Standard Temp. : 25°C
 Test Temp. : 0°C, 100°C

Resistance	T. C. (ppm/°C)	
	2 Terminal Type	4 Terminal Type
1Ω ≤ R	±30	±30
0.1Ω ≤ R < 1Ω	±50	±30
0.05Ω ≤ R < 0.1Ω	±50	±30
0.01Ω ≤ R < 0.05Ω	±100	±50
0.005Ω ≤ R < 0.01Ω	—	±50
0.001Ω ≤ R < 0.005Ω	—	±50

Surface Temp. Versus Power Load. (on chassis)

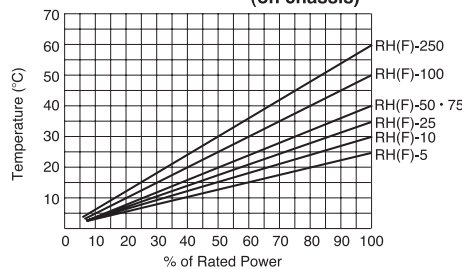

Surface Temp. Versus Power Load. (Free air)

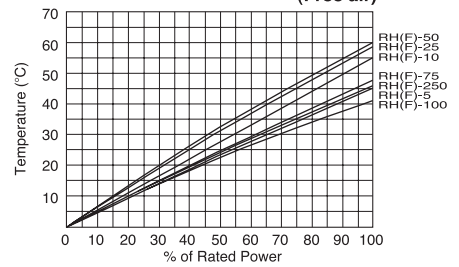

PRECISION TYPE METAL CLAD RESISTORS

RH / RHF

■ Performance

Parameters	Test Condition	Specification
Short Time Over Load	2×Wattage Rating 5sec	±0.1%
Heat Resistance	Normal Temp. → 150°C 2Hr	±0.1%
Dielectric Strength	FIG.1 1min	±0.02%
Insulation Resistance	DC500V	1000MΩ MIN
Moisture Resistance	+40°C, 90~95%RH, 1/10×Wattage Rating (1.5Hr ON-0.5Hr OFF) Repeat 500Hr	±0.05% Insulation R 100MΩ MIN
Vibration	10Hz~55Hz~10Hz (1min) 2Hr each of paralleled and Right angle	±0.1%
Load Life	Load Voltage Rating (Chassis mounted) 1.5Hr ON- 0.5Hr OFF (Repeat 2000Hr)	±0.2%

Internal Circuit of 4 Terminal Resistors



Notes :

- This RH/RHF series is designed for chassis mounting style and note the followings.
 - In order to mount the resistor tightly to chassis, mounting surface should be completely smooth.
 - On the mounting surface, paint flatly the well temperature-conductive material like the radiant heat grease.
 - For RH(F)50M, RH(F)75, RH(F)100 and RH(F)250, use solderless terminal for the terminal and cable connection and fasten the nut by the following torque.
 RH(F)50M : 0.6N·m MAX, RH(F)75 : 1.18~1.57N·m, RH(F)100, RH(F)250 : 1.96~2.35N·m (M4 Terminal : 0.60~0.75N·m)

How to order

RHF100M4 0.05Ω A
 Type Resistance Tolerance

Note : As for the terminal style E, indicate the terminal length of root from the terminal joint point. (standard type terminal lengths 10mm)

Standard Resistance (Stock)			
RHF50ML 1mΩF	RHF75ML 1mΩB	RHF100M4 1mΩB	RHF250M4 1mΩB
RHF50ML 5mΩD	RHF75ML 5mΩA	RHF100M4 0.01ΩQ	RHF250M4 5mΩA
RHF50ML 0.01ΩB	RHF75ML 0.01ΩQ	RHF100M4 0.1ΩQ	RHF250M4 0.01ΩQ
RHF50ML 0.05ΩQ	RHF75ML 0.05ΩQ		RHF250M4 0.05ΩQ
RHF50ML 0.1ΩQ	RHF75ML 0.1ΩQ		RHF250M4 0.1ΩQ
RHF50ML 0.5ΩQ			
RHF50ML 1ΩQ			
F : ±1% D : ±0.5% B : ±0.1% A : ±0.05% Q : ±0.02%			



PCN Corporation

Sagamihara Business Office

4-3-17 Sagamihara, Chuo-ku, Sagamihara-shi, Kanagawa-Pref., JAPAN 252-0231
 Phone : 81-42-776-0931 Fax : 81-42-776-0940 E-mail : sales@pcn.co.jp