
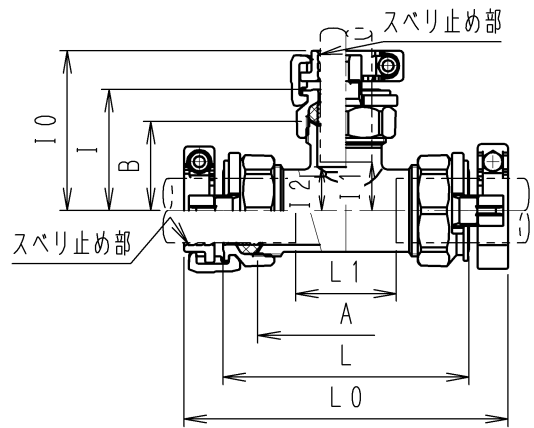


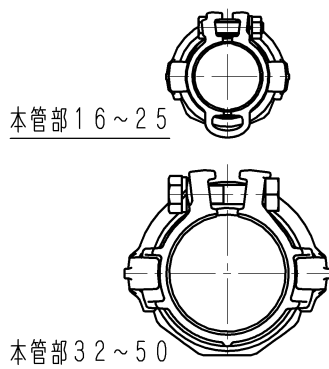

鋼管

呼び 径	各 部 寸 法									
	A	LO	L	L1		B	IO	I	I1	I2
				MAX	MIN					
16 × 16	79	138	102	38	22	39	69	51	19	17
20 × 16	75	142	100	32	22	42	72	54	22	20
× 20	83	150	108	40	27	45	79	58	24	20
25 × 16	82	152	111	42	22	46	76	58	26	23
× 20	86	156	115	46	27	47	81	60	26	23
× 25	93	163	122	53	34	50	85	65	30	23
32 × 16	105	180	136	60	22	49	79	61	29	27
× 20	110	185	141	65	27	49	83	62	28	27
× 25	120	195	151	75	34	50	85	65	30	27
× 32	140	215	171	95	42	70	108	86	48	27
40 × 16	104	188	139	58	22	53	83	65	33	31
× 20	115	199	150	69	27	55	89	68	34	31
× 25	120	204	155	74	34	56	91	71	36	31
× 32	145	229	180	99	42	70	108	86	48	31
× 40	150	234	185	104	48	75	117	93	52	31
50 × 16	124	210	161	60	22	67	97	79	47	38
× 20	105	191	142	41	27	70	104	83	49	38
× 25	110	196	147	46	34	70	105	85	50	38
× 32	140	226	177	76	42	72	110	88	50	35
× 40	135	221	172	71	48	68	110	86	45	34
× 50	145	231	182	81	60	77	120	96	45	32
許 容 差	±5									

鋼管 × ポリエチレン管 (JIS)

呼び 径	各 部 寸 法									
	A	LO	L	L1		B	IO	I	I1	I2
				MAX	MIN					
16 × P10	70	129	93	29	18	39	69	51	19	17
× P13	79	138	102	38	22	39	69	51	19	17
20 × P10	71	138	96	28	18	41	71	53	21	20
× P13	75	142	100	32	22	42	72	54	22	20
× P20	83	150	108	40	27	45	79	58	24	20
25 × P10	86	156	115	46	18	44	74	56	24	23
× P13	82	152	111	42	22	46	76	58	26	23
× P20	86	156	115	46	27	47	81	60	26	23
× P25	93	163	122	53	34	50	85	65	30	23
32 × P10	80	155	111	35	18	52	82	64	32	25
× P13	105	180	136	60	22	49	79	61	29	27
× P20	110	185	141	65	27	49	83	62	28	27
× P25	120	195	151	75	34	50	85	65	30	27
× P30	140	215	171	95	42	70	108	86	48	27
40 × P10	95	179	130	49	18	49	79	61	29	31
× P13	104	188	139	58	22	53	83	65	33	31
× P20	115	199	150	69	27	55	89	68	34	31
× P25	120	204	155	74	34	56	91	71	36	31
× P30	145	229	180	99	42	70	108	86	48	31
× P40	150	234	185	104	48	75	117	93	52	31
50 × P10	118	204	155	54	18	61	91	73	41	38
× P13	124	210	161	60	22	67	97	79	47	38
× P20	105	191	142	41	27	70	104	83	49	38
× P25	110	196	147	46	34	70	105	85	50	38
× P30	140	226	177	76	42	72	110	88	50	35
× P40	135	221	172	71	48	68	110	86	45	34
× P50	145	231	182	81	60	77	120	96	45	32
許 容 差	±5									

注) L、L0は、施工後の最大寸法。(計算値)

L1 MAX、I1は、パイプの規定挿入量を基にして算出。(計算値)

L1 MINは、枝部パイプ外径を基にして算出。(計算値)

接水部は、内面エポキシ樹脂コーティングで、膜厚0.2mm以上とする。
(JIS B 2301)

名 称

SKX ナット付チーズ 鋼管接続用
(SKX-NT 1/2)

図面番号

SK-SKX2301-E2-23-NT-G-04

(SK) 株式会社川西水道機器



23年04月05日

尺 度

1/4

SIZE

A4

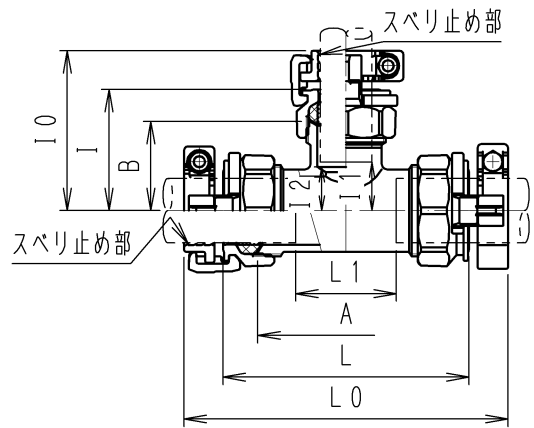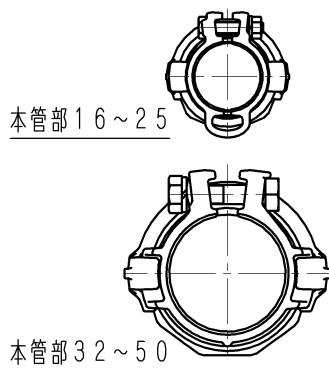

鋼管×塩ビ管

呼び径	各部寸法									
	A	LO	L	L1		B	IO	I	I1	I2
				MAX	MIN					
16 × V13	70	129	93	29	18	39	69	51	19	17
× V16	79	138	102	38	22	39	69	51	19	17
20 × V13	71	138	96	28	18	41	71	53	21	20
× V16	75	142	100	32	22	42	72	54	22	20
× V20	83	150	108	40	27	45	79	58	24	20
25 × V13	86	156	115	46	18	44	74	56	24	23
× V16	82	152	111	42	22	46	76	58	26	23
× V20	86	156	115	46	27	47	81	60	26	23
× V25	93	163	122	53	34	50	85	65	30	23
32 × V13	80	155	111	35	18	52	82	64	32	25
× V16	105	180	136	60	22	49	79	61	29	27
× V20	110	185	141	65	27	49	83	62	28	27
× V25	120	195	151	75	34	50	85	65	30	27
× V30	140	215	171	95	42	70	110	88	50	27
40 × V13	95	179	130	49	18	49	79	61	29	31
× V16	104	188	139	58	22	53	83	65	33	31
× V20	115	199	150	69	27	55	89	68	34	31
× V25	120	204	155	74	34	56	91	71	36	31
× V30	140	224	175	94	38	70	108	86	48	31
× V40	150	234	185	104	48	75	117	93	52	31
50 × V13	118	204	155	54	18	61	91	73	41	38
× V16	124	210	161	60	22	67	97	79	47	38
× V20	105	191	142	41	27	70	104	83	49	38
× V25	110	196	147	46	34	70	105	85	50	38
× V30	140	226	177	76	38	75	113	91	53	38
× V40	135	221	172	71	48	68	110	86	45	34
× V50	145	231	182	81	60	77	120	96	45	32
許容差	±5									

鋼管×内外面被覆鋼管(VD)

呼び径	各部寸法									
	A	LO	L	L1		B	IO	I	I1	I2
				MAX	MIN					
20 × D15	83	150	108	40	27	45	79	58	24	20
25 × D15	86	156	115	46	27	47	81	60	26	23
× D20	93	163	122	53	34	50	85	65	30	23
32 × D15	110	185	141	65	27	49	83	62	28	27
× D20	120	195	151	75	34	50	85	65	30	27
× D25	140	215	171	95	42	70	110	88	50	27
40 × D15	115	199	150	69	27	55	89	68	34	31
× D20	120	204	155	74	34	56	91	71	36	31
× D25	140	224	175	94	38	70	108	86	48	31
50 × D15	105	191	142	41	27	70	104	83	49	38
× D20	110	196	147	46	34	70	105	85	50	38
× D25	140	226	177	76	38	75	113	91	53	38
× D50	160	246	197	96	63	85	129	104	49	34
許容差	±5									

注) L、L0は、施工後の最大寸法。(計算値)

L1 MAX、I1は、パイプの規定挿入量を基にして算出。(計算値)

L1 MINは、枝部パイプ外径を基にして算出。(計算値)

接水部は、内面エポキシ樹脂コーティングで、膜厚0.2mm以上とする。
(JIS B 2301)

名称

SKX ナット付チース 鋼管接続用
(SKX-NT 2/2)

図面番号

SK-SKX2301-E2-23-NT-G-04

株式会社川西水道機器

23年04月05日

尺度

1/4

SIZE

A4