


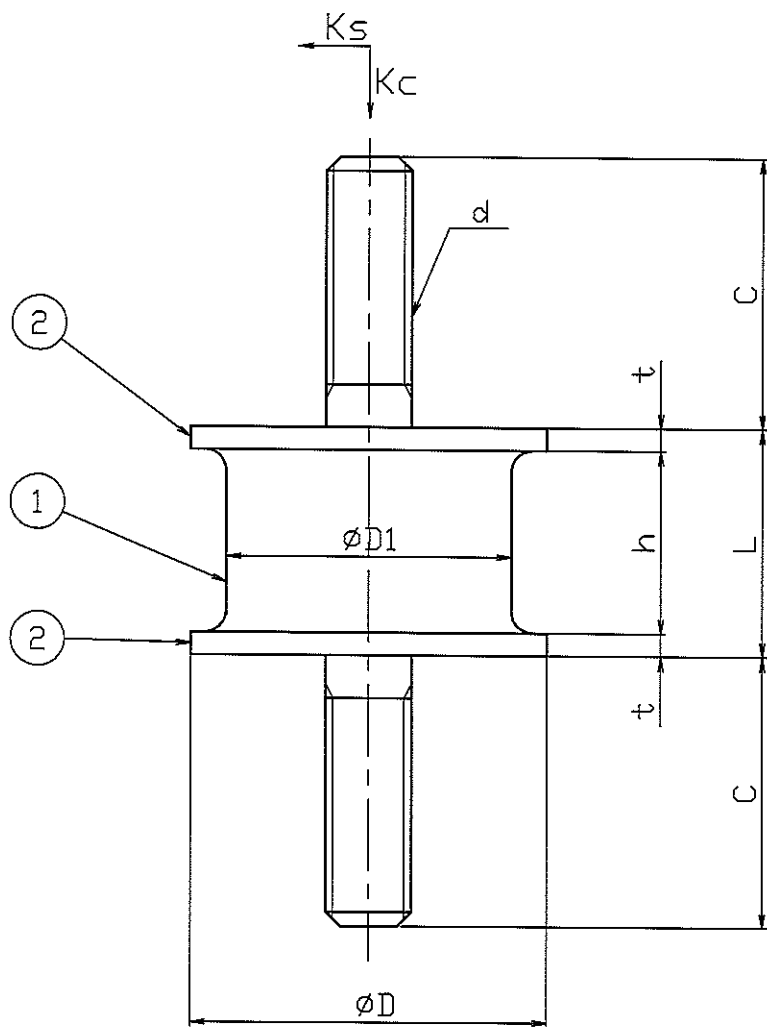

|       | 製品寸法 |     |    |      |     |     |    | 特 性 値              |             |               |                            |              |            |
|-------|------|-----|----|------|-----|-----|----|--------------------|-------------|---------------|----------------------------|--------------|------------|
|       | φD   | φD1 | L  | h    | d   | t   | C  | 圧縮ばね: Kc<br>(N/mm) | 最大荷重<br>(N) | 最大たわみ<br>(mm) | 受圧面積<br>(cm <sup>2</sup> ) | 剛性比<br>Ks/Kc | 質 量<br>(g) |
| TA501 | 15   | 11  | 15 | 11.8 | M5  | 1.6 | 14 | 34.5               | 88          | 2.6           | 0.95                       | 0.15         | 9          |
| TA502 | 21   | 16  | 16 | 12.8 | M6  |     | 19 | 78.5               | 185         | 2.4           | 1.8                        | 0.15         | 18         |
| TA503 | 25   | 20  |    |      |     |     |    | 135                | 345         | 2.5           | 3.1                        | 0.17         | 25         |
| TA504 | 29   | 24  | 20 | 15.4 | M8  | 2.3 | 23 | 175                | 490         | 2.8           | 4.5                        | 0.17         | 55         |
| TA505 |      |     | 30 | 25.4 |     |     |    | 83.5               | 390         | 4.7           |                            | 0.18         | 60         |
| TA506 | 38   | 32  | 20 | 15.4 |     |     | 28 | 345                | 930         | 3.2           | 8.0                        | 0.17         | 80         |
| TA507 |      |     | 25 | 20.4 |     |     |    | 225                | 835         | 3.7           |                            | 0.19         | 85         |
| TA508 |      |     | 30 | 25.4 |     |     |    | 150                | 735         | 4.8           |                            | 0.18         | 90         |
| TA509 | 46   | 40  | 25 | 18.6 | M10 | 3.2 | 27 | 420                | 1550        | 3.7           | 12.6                       | 0.16         | 145        |
| TA510 |      |     | 30 | 23.6 |     |     |    | 285                | 1350        | 4.8           |                            | 0.15         | 155        |
| TA511 |      |     | 40 | 33.6 |     |     |    | 165                | 1050        | 6.5           |                            | 0.17         | 170        |
| TA512 | 69   | 63  | 40 | 33.6 | M12 | 3.7 | 37 | 520                | 3350        | 6.4           | 31.2                       | 0.15         | 380        |
| TA513 |      |     |    |      |     |     |    | 55                 | 48.6        | 295           |                            | 2750         | 9.3        |
| TA514 | 90   | 80  | 60 | 50.0 | M16 | 5.0 | 45 | 520                | 5200        | 10.0          | 50.3                       | 0.17         | 920        |
| TA515 |      |     | 80 | 70.0 |     |     |    | 320                | 4450        | 14.0          |                            | 0.15         | 1030       |
| TA516 | 50   | 42  | 27 | 20.6 | M10 | 3.2 | 30 | 610                | 2500        | 4.1           | 13.9                       | 0.17         | 155        |