

10/100 BASE-T ETHERNET ISOLATION TRANSFORMER

P/N: TS8121CX HF DATA SHEET

Pag1/2

Feature



- Designed to meet IEEE 802.3u requirement, including 350uH OCL with 8mA bias.
- Comply with ROHS & Halogen Free requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +85°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100KHz/0.1V with 8mA DC Bias	L.L (uH Max)	C _{w/w} (pF Max)	DCR (Ω Max)		HI-POT (Vrms)
	1-3:16-14	6-8:11-9				1-3/6-8	16-14/11-9	
TS8121CX HF	1CT:1CT	1CT:1CT	350	0.5	56	0.7	1.1	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)			Cross talk (dB Min)		DCMR (dB Min)		
	0.3-100MHz	30MHz	60MHz	80MHz	0.3-60MHz	60-100MHz	30MHz	60MHz	100MHz
TS8121CX HF	-1.15	-18	-14	-12	-45	-35	-40	-35	-30

Schematic


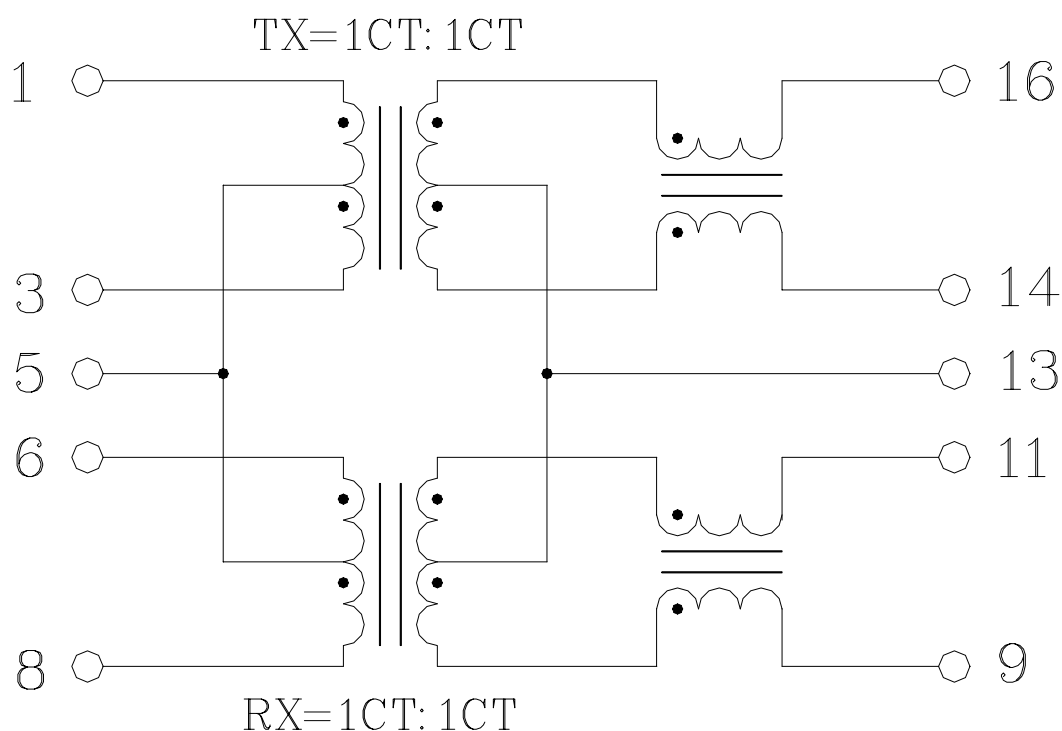


10/100 BASE-T ETHERNET ISOLATION TRANSFORMER



P/N: TS8121CX HF DATA SHEET

Pag2/2

Mechanical

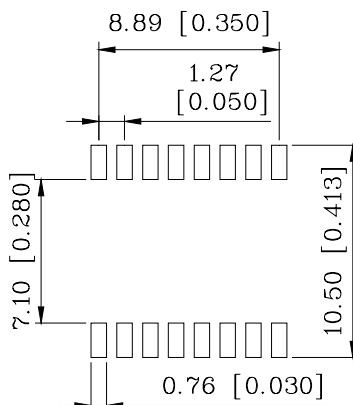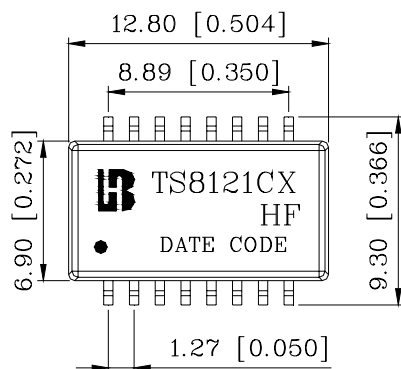

SUGGESTED PAD LAYOUT

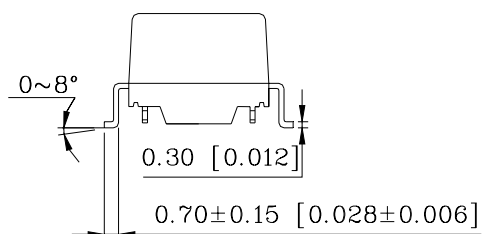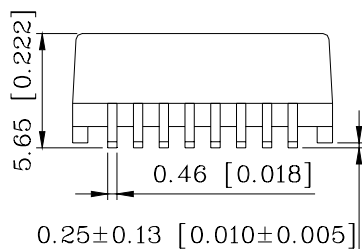

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]