

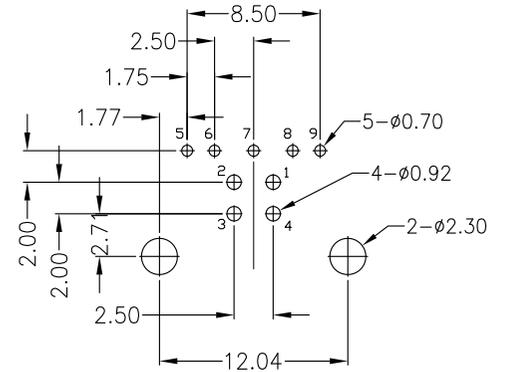
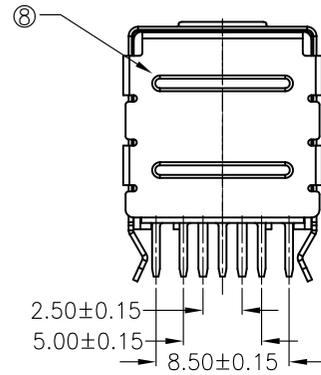
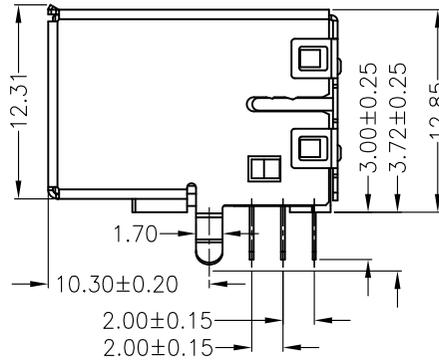
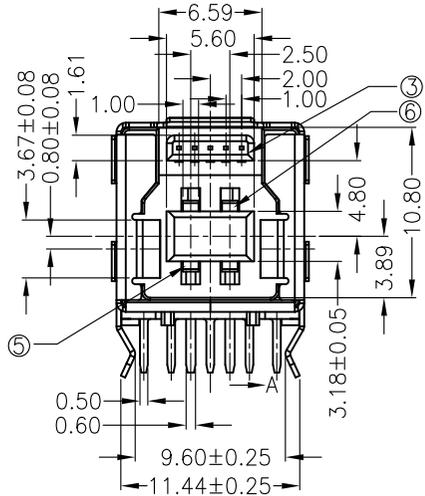
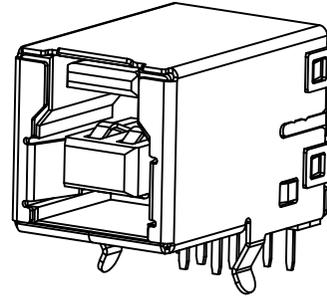


RoHS Complied

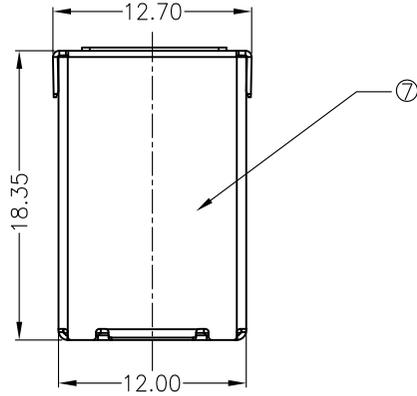

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.10)

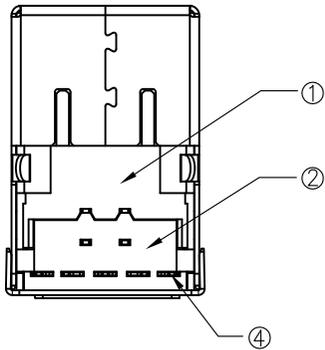

ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK	
⑧	BACK SHELL	----	1	SPCC t=0.3	MB:Cu(MIN 3.μm or more) NI(MIN 1.5μm or more)PLATED	
⑦	SHELL	----	1	C2680 t=0.3	MB:Cu(MIN 1μm or more) NI(MIN 1.5μm or more)PLATED	
⑥	Long Contact	----	2	C5191 t=0.25	Under plating: Ni plating(MIN 1μm) Contact area: Gold flash plating(MIN 0.025μm) Soldering area: Sn alloy plating(MIN 2μm)	
⑤	Short Contact	----	2	C5191 t=0.25		
④	5 pin Contact	----	5	C2680 t=0.2		
③	Insert mold 5 pin connector	----	1	PBT(BLUE)	UL 94V-0	
②	COVER	----	1	PBT(BLUE)	UL 94V-0	
①	HOUSING	----	1	PBT(BLUE)	UL 94V-0	
DSND	Peng	DATE	2011.06.02	3RD ANGLE PROJECTION	NAME	
DWN	Robert	DATE	2016.10.22		USB 3.0 B TYPE CONNECTOR	
CHKD	Kenyin	DATE	2016.10.22		CAT. NO.	
APVD	Wang	DATE	2016.10.22		UNIT: MM	UB3-046AL90-NAZ1
					DWN.NO.	1/1
					A-UB3-046AL90	001

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3