




BT series High Temperature Range, For +125°C Use

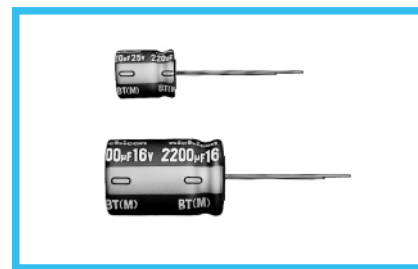


- Highly dependable reliability withstanding load life of 2000 to 10000 hours at +125°C.
- Suited for automobile electronics where heavy duty services are indispensable.
- Compliant to the RoHS directive (2002/95/EC).



Specifications

Item	Performance Characteristics																																												
Category Temperature Range	-40 to +125°C (10 to 250V), -25 to +125°C (350 to 450V)																																												
Rated Voltage Range	10 to 450V																																												
Rated Capacitance Range	1 to 4700µF																																												
Capacitance Tolerance	±20% at 120Hz, 20°C																																												
Leakage Current	Rated Voltage (V)	10 to 100																																											
	Leakage current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (µA), whichever is greater.																																											
Tangent of loss angle (tan δ)	160 to 450																																												
	CV ≤ 1000 : I = 0.1CV+40 (µA) max. (1 minute's) CV > 1000 : I = 0.04CV+100 (µA) max. (1 minute's)																																												
Stability at Low Temperature	120Hz, 20°C																																												
	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160 to 250</th> <th>350 to 450</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.20</td> <td>0.24</td> </tr> </tbody> </table> <p>For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF.</p>											Rated voltage (V)	10	16	25	35	50	63	80	100	160 to 250	350 to 450	tan δ (MAX.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08	0.20	0.24												
Rated voltage (V)	10	16	25	35	50	63	80	100	160 to 250	350 to 450																																			
tan δ (MAX.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08	0.20	0.24																																			
Endurance	120Hz																																												
	<table border="1"> <thead> <tr> <th colspan="2">Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160 to 250</th> <th>350 to 450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio</td> <td>Z-25°C / Z+20°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>6</td> <td>-</td> </tr> </tbody> </table>											Rated voltage (V)		10	16	25	35	50	63	80	100	160 to 250	350 to 450	Impedance ratio	Z-25°C / Z+20°C	3	2	2	2	2	2	2	2	3	6	ZT / Z20 (MAX.)	4	4	4	4	4	4	4	4	6
Rated voltage (V)		10	16	25	35	50	63	80	100	160 to 250	350 to 450																																		
Impedance ratio	Z-25°C / Z+20°C	3	2	2	2	2	2	2	2	3	6																																		
	ZT / Z20 (MAX.)	4	4	4	4	4	4	4	4	6	-																																		
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for less than 50V (φD = 8 : 2000 hours, φD = 10 : 5000 hours, φD ≥ 12.5 : 10000 hours), 63 to 100V (φD = 8 : 2000 hours, φD = 10 : 3000 hours, φD ≥ 12.5 : 5000 hours), more than 160V (2000 hours) at 125°C, the peak voltage shall not exceed the rated voltage.																																												
	<table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within ±30% of the initial capacitance value (10 to 100V) Within ±20% of the initial capacitance value (160 to 450V)</td> </tr> <tr> <td>Dissipation Factor</td> <td>300% or less than the initial specified value (10 to 100V) 200% or less than the initial specified value (160 to 450V)</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>											Capacitance change	Within ±30% of the initial capacitance value (10 to 100V) Within ±20% of the initial capacitance value (160 to 450V)	Dissipation Factor	300% or less than the initial specified value (10 to 100V) 200% or less than the initial specified value (160 to 450V)	Leakage current	Less than or equal to the initial specified value																												
	Capacitance change	Within ±30% of the initial capacitance value (10 to 100V) Within ±20% of the initial capacitance value (160 to 450V)																																											
Dissipation Factor	300% or less than the initial specified value (10 to 100V) 200% or less than the initial specified value (160 to 450V)																																												
Leakage current	Less than or equal to the initial specified value																																												
After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																													
Marking	Printed with white color letter on blue sleeve.																																												

Radial Lead Type

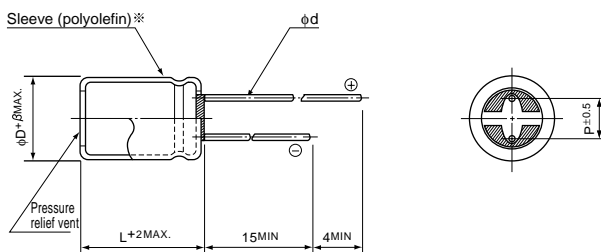


※ P.E.T. sleeve product is also available upon request.

	(mm)				
φD	8	10	12.5	16	18
β	0.8	0.8	1.0	1.0	1.0
P	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6*	0.8	0.8

※ In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

• Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 220µF)

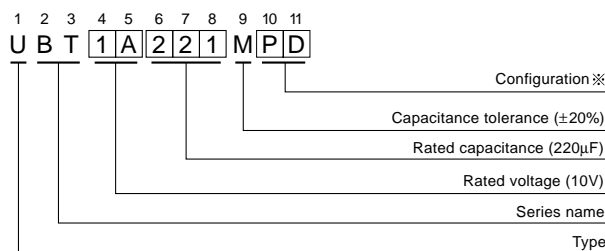

※ Configuration

φ D	Pb-free leadwire Pb-free Polyolefin sleeve
8 - 10	PD
12.5 to 18	HD

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

■ Dimensions

Cap. (μF)	V(Code)	Item Code	10 (1A)			16 (1C)			25 (1E)			35 (1V)			50 (1H)		
			Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)
1	010																
2.2	2R2																
3.3	3R3																
4.7	4R7																
10	100																
22	220																
33	330																
47	470																
100	101																
220	221	8 × 11.5	0.26	340	10 × 12.5	0.15	620	10 × 12.5	0.10	680	10 × 16	0.094	790	10 × 20	0.098	930	
330	331	10 × 12.5	0.15	620	10 × 12.5	0.10	680	10 × 16	0.075	945	10 × 20	0.075	950	12.5 × 20	0.070	1330	
470	471	10 × 12.5	0.10	680	10 × 16	0.075	945	10 × 20	0.057	1100	12.5 × 20	0.058	1330	12.5 × 25	0.055	1650	
1000	102	10 × 20	0.057	1100	12.5 × 20	0.042	1490	12.5 × 25	0.033	1750	16 × 25	0.031	2010	16 × 31.5	0.031	2430	
2200	222	12.5 × 25	0.033	1750	16 × 25	0.024	2300	16 × 31.5	0.020	2710	18 × 35.5	0.025	2790				
3300	332	16 × 25	0.024	2300	16 × 31.5	0.020	2710	18 × 31.5	0.017	3310							
4700	472	16 × 31.5	0.020	2710	18 × 31.5	0.018	3270										

Cap. (μF)	V(Code)	Item Code	63 (1J)			80 (1K)			100 (2A)		
			Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)
4.7	4R7										
10	100										
22	220	8 × 11.5	2.00	130	8 × 11.5	1.50	150	10 × 12.5	0.80	480	
33	330	8 × 11.5	1.50	150	10 × 12.5	0.80	480	10 × 12.5	0.80	480	
47	470	10 × 12.5	0.59	530	10 × 12.5	0.80	480	10 × 16	0.55	630	
100	101	10 × 16	0.41	690	10 × 20	0.39	790	12.5 × 20	0.25	990	
220	221	12.5 × 20	0.16	1050	12.5 × 25	0.18	1240	16 × 25	0.11	1500	
330	331	12.5 × 25	0.12	1290	12.5 × 31.5	0.16	1390	16 × 31.5	0.079	1790	
470	471	12.5 × 31.5	0.097	1460	16 × 25	0.11	1500				

Rated ripple current (mAmps) at 125°C 100kHz
Impedance (Ω) MAX. at 20°C 100kHz

● Frequency coefficient of rated ripple current

V	CV	Frequency			
		120Hz	300Hz	1kHz	10kHz or more
10 to 100	1000 > CV	0.50	0.64	0.83	1.00
	1000 ≤ CV	0.67	0.79	0.91	1.00

Cap. (μF)	V(Code)	Item Code	160 (2C)		200 (2D)		250 (2E)		350 (2V)		400 (2G)		450 (2W)	
			Case size φD × L (mm)	Rated ripple (mAmps)	Case size φD × L (mm)	Rated ripple (mAmps)	Case size φD × L (mm)	Rated ripple (mAmps)	Case size φD × L (mm)	Rated ripple (mAmps)	Case size φD × L (mm)	Rated ripple (mAmps)	Case size φD × L (mm)	Rated ripple (mAmps)
4.7	4R7													
10	100													
22	220	10 × 20	115	10 × 25	126	12.5 × 20	128	12.5 × 25	139	12.5 × 31.5	142	16 × 25	154	
33	330	10 × 25	154	12.5 × 20	157	12.5 × 25	171	16 × 25	189	16 × 25	189	16 × 31.5	203	
47	470	12.5 × 20	187	12.5 × 25	204	16 × 25	225	16 × 31.5	243	16 × 31.5	243			
68	680	12.5 × 25	245	16 × 20	250	16 × 31.5	292							
100	101	16 × 25	329	16 × 25	329									
150	151	16 × 31.5	434											

Rated ripple current (mAmps) at 125°C 120Hz

● Frequency coefficient of rated ripple current

V	Cap. (μF)	Frequency					
		50Hz	120Hz	300Hz	1kHz	10kHz	100kHz
160 to 450	4.7 to 33	0.75	1.00	1.25	1.50	1.75	1.80
	47 to 150	0.80	1.00	1.15	1.30	1.40	1.50