


DIM.	TOL.
5mm DOWN.	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP.	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

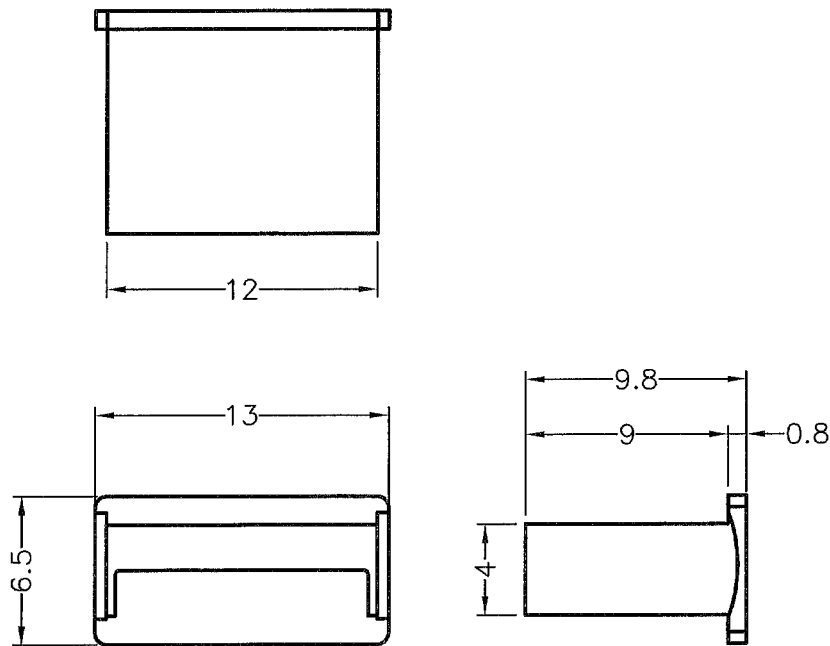

PART NO.	COLOR
USBC-4	COMPUTER
USBC-4(B)	BLACK
USBC-4(G)	GRAY
USBC-4(LG)	DARK GRAY
USBC-4(T)	NATURAL (TRANSPARENT)
USBC-4(W)	WHITE

QMFZ2 Component - Plastics
 NAN YA PLASTICS CORP PLASTICS 4TH DIV
 3RD FL 201 TUNG HWA NORTH RD TAIPEI TW
 Material Designation: 3117(f1)
 Product Description: Polypropylene (PP), furnished as pellets, sheets.
 Friday, October 24, 2003 E130155

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IBC GWIT	IBC GWFI
ALL	1.5	HB	3	0	125	125	125	-	-
	3	HB	2	0	125	125	125	-	-

IBC CTI: - HVTR: 0 D495: 4 IBC Ball Pressure (C): -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹⁰ohm-cm): - Dimensional Stability(%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -
 (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

Report Date: 1/28/1991 Underwriters Laboratories Inc®
 UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

PART NUMBER SEE ABOVE				DRAWING NUMBER		TITLE USB HOUSING		SPEC. DWG.				
				SIZE A4				SCALE 3:1		MATERIAL PP		DATE 2004.12.28
								UNIT mm		FINISH		DRAWN JASON
				REV E		COLOR SEE ABOVE		CHECK		APPROVED		
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE				APPROVED		