



■ビニル絶縁付角先開形端子(ストレート形)

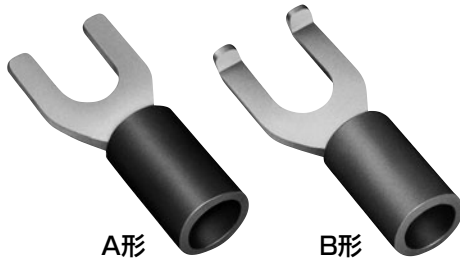

A形

B形

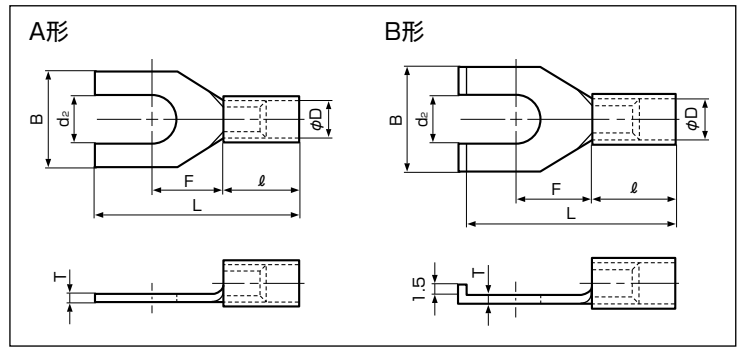

E42024



LR20812


形番		規格	寸法(mm)							標準色	適用電線範囲	適用圧着工具			1箱 入数 (個)										
			d2	B	L	F	ℓ	φD	T		燃線(mm ²)	手動	空気圧式	油圧式											
A形	V1.25-B3A	 	3.2	5.8	20.0	6.3	9.0	3.2	0.8	赤	※ 0.25~1.65 ※ 0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 1.25 (AWG#16)	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	V1.25-YS3A	 		6.4	19.6																				
	V1.25-S3A	 		7.2	20.0																				
	V1.25-N3A	 		6.2																					
	V1.25-C3.5A	 		5.6																					
	V1.25-YS4A	 	4.3	6.4	19.6	7.0																			
	V1.25-S4A	 		7.2	20.0																				
	V1.25-4A	 		8.5																					
	V1.25-5A	 	5.3	9.5	11.0																				
	V1.25-6A	 	6.4	12.0		26.2																			
B形	V2-N3A	 	3.2	5.9	20.0	6.3	9.0	3.9	0.8	青	1.04~2.63 1.25 (AWG#16) 2.0 (AWG#14)	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	V2-YS3A	 		6.4	19.6																				
	V2-S3A	 		7.2	20.2											6.5									
	V2-YS4A	 	4.3	6.4	19.6	6.3																			
	V2-YM4A	 		6.8	20.2											6.5									
	V2-S4A	 		7.2																					
	V2-4A	 	8.5	21.0	7.3																				
	V2-5A	 	5.3	9.5																					
	V2-6A	 	6.4	12.0		26.2										11.0									
	C形	V5.5-S3A	 	3.7	7.2	26.2										7.5	13.5	5.4	1.0	黄	2.63~6.64 3.5 (AWG#12) 5.5 (AWG#10)	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500
V5.5-3A		 	9.5																						
V5.5-S4A		 	4.3	8.5																					
V5.5-4A		 		9.5																					
V5.5-5A		 	5.3	13.5	32.2	12.2																			
V5.5-6A		 	6.4																						
D形		V1.25-S3B	 				3.7	7.5	17.3	5.1	9.0	3.2	0.8	赤	※0.25~1.65 ※0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 1.25 (AWG#16)	YNT-2216									
		V1.25-3B	 	8.5	21.7	7.2																			
		V1.25-S4B	 	4.3	7.5	17.3	5.1																		
		V1.25-4B	 		8.5	22.7	7.2																		
	V1.25-5B	 	5.3	13.5	28.2	11.7																			
	V1.25-6B	 	6.4																						
E形	V2-T3B	 	3.7				7.5	17.7	5.2	9.0	3.9	0.8	青	1.04~2.63 1.25 (AWG#16) 2.0 (AWG#14)	YNT-1614	YA-1,YAD-1A YA-2,YAD-2A YAT-1A YAT-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000							
	V2-3B	 		8.5	21.2	7.2																			
	V2-T4B	 	4.3	7.5	17.7	5.2																			
	V2-4B	 		8.5	21.2	7.3																			
	V2-5B	 	5.3	13.5	28.2	11.7																			
	V2-6B		6.4																						
	F形	V5.5-S3B					3.7	7.6	24.7	6.2	13.5	5.4	1.0	黄	2.63~6.64 3.5 (AWG#12) 5.5 (AWG#10)	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500						
		V5.5-3B		8.5	26.2	7.5																			
		V5.5-S4B		4.3	7.6	24.7	6.2																		
		V5.5-4B			8.5	26.2	7.5																		
V5.5-5B			5.3	13.5	33.2	12.2																			
V5.5-6B			6.4																						

注1) ※印は電線の合計断面積が0.5mm²以上となる様にして使用すればより確実になります。


(例:0.3mm²を2つ折りにして圧着、0.5mm²はそのまま圧着)

注2) ナイロン絶縁付仕様、また丸先開形端子(X形)、丸横開形端子(Y形)仕様も製作できます。詳細は弊社までお問い合わせください。

注3) 本製品の中には多少納期を要するものもあります。




■ビニル絶縁付角先開形端子 (F形)

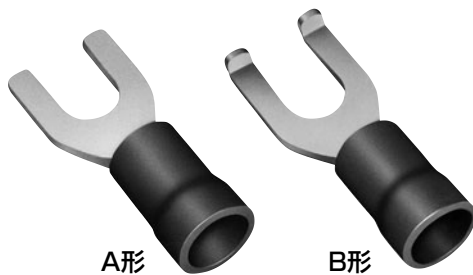

A形

B形

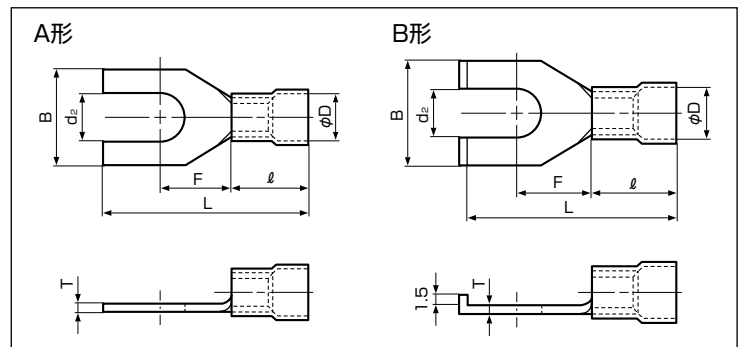

E42024



LR20812

形番		規格	寸法(mm)							標準色	適用電線範囲	適用圧着工具			1箱 入数 (個)										
			d2	B	L	F	ℓ	φD	T		撚線(mm ²)	手動	空気圧式	油圧式											
A形	FV1.25-B3A	 	3.2	5.8	20.0	6.3	9.0	4.0	0.8	赤	※ 0.25~1.65 ※ (0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	FV1.25-YS3A	 		6.4	19.6																				
	FV1.25-S3A	 	3.7	7.2	20.0																				
	FV1.25-N3A	 		6.2	20.0																				
	FV1.25-YS4A	 	4.3	6.4	19.6	7.0	9.0	4.5	0.8	青	1.04~2.63 (1.25 (AWG#16)) (2.0 (AWG#14))	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	FV1.25-S4A	 		7.2	20.0																				
	FV1.25-4A	 		8.5	20.0	7.3										13.5	6.8	1.0	黄	2.63~6.64 (3.5 (AWG#12)) (5.5 (AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500	
	FV1.25-5A	 	5.3	9.5	20.0																				
	FV1.25-6A	 	6.4	12.0	26.2	11.0	9.0	4.5	0.8	青	(1.25 (AWG#16)) (2.0 (AWG#14))	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	FV2-N3A	 	3.2	5.9	20.0	6.3																			
	FV2-YS3A	 	3.7	6.4	19.6																				
	FV2-S3A	 		7.2	20.2	6.5																			
	FV2-YS4A	 	4.3	6.4	19.6	6.3																			
	FV2-YM4A	 		6.8	19.6	6.3																			
	FV2-S4A	 		7.2	20.2	6.5																			
	FV2-4A	 		8.5	21.0	7.3																			
	FV2-5A	 	5.3	9.5	21.0	7.3																			
	FV2-6A	 	6.4	12.0	26.2	11.0																			
B形	FV5.5-S3A	 	3.7	7.2	7.5	13.5	6.8	1.0	黄	(3.5 (AWG#12)) (5.5 (AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500											
	FV5.5-3A	 		9.5																					
	FV5.5-S4A	 	4.3	8.5																					
	FV5.5-4A	 		9.5																					
	FV5.5-5A	 	5.3		12.2	13.5	6.8	1.0	黄		YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500											
	FV5.5-6A	 	6.4	13.5											32.2	12.2									
	FV1.25-S3B	 	3.7	7.5	17.3	5.1	9.0	4.0	0.8	赤	※0.25~1.65 (※0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1,YAD-1A YA-2,YAD-2A YAT-1A YAT-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	FV1.25-3B	 		8.5	21.7	7.2																			
	FV1.25-S4B	 	4.3	7.5	17.3	5.1																			
	FV1.25-4B	 		8.5	22.7	7.2																			
	FV1.25-5B	 	5.3		11.7	13.5	6.8	1.0	黄		YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500											
	FV1.25-6B	 	6.4	13.5											28.2	11.7									
	FV2-T3B	 	3.7	7.5	17.7	5.2	9.0	4.5	0.8	青	1.04~2.63 (1.25 (AWG#16)) (2.0 (AWG#14))	YNT-1614	YA-1,YAD-1A YA-2,YAD-2A YAT-1A YAT-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000										
	FV2-3B	 		8.5	21.2	7.2																			
	FV2-T4B	 	4.3	7.5	17.7	5.2																			
	FV2-4B	 		8.5	21.2	7.3																			
	FV2-5B	 	5.3		11.7	13.5	6.8	1.0	黄		YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500											
	FV2-6B	 	6.4	13.5											28.2	11.7									
FV5.5-S3B	 	3.7	7.6	24.7	6.2	13.5	6.8	1.0	黄	2.63~6.64 (3.5 (AWG#12)) (5.5 (AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500											
FV5.5-3B	 		8.5	26.2	7.5																				
FV5.5-S4B	 	4.3	7.6	24.7	6.2																				
FV5.5-4B	 		8.5	26.2	7.5																				
FV5.5-5B	 	5.3		12.2	13.5	6.8	1.0	黄		YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500												
FV5.5-6B	 	6.4	13.5											33.2	12.2										

注1) ※印は電線の合計断面積が0.5mm²以上となる様にして使用すればより確実になります。

(例:0.3mm²を2つ折りにして圧着、0.5mm²はそのまま圧着)

注2) ナイロン絶縁付仕様、また丸先開形端子(X形)、丸横開形端子(Y形)仕様も製作できます。詳細は弊社までお問い合わせください。

注3) 本製品の中には多少納期を要するものもあります。