

SMD Inductors(Coils)

Conformity to RoHS Directive

For Power Line(Wound, Magnetic Shielded)

VLCF Series VLCF4020


FEATURES

- Miniature size
- Mount area: 4x4mm
- Height: 2.0mm max.
- Generic use for portable DC to DC converter line
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


DC to DC converters for DVC, DSC, PDA, MD, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS

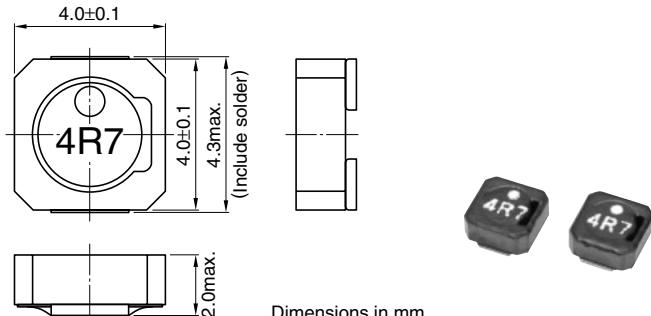

Dimensions in mm

RECOMMENDED PC BOARD PATTERN

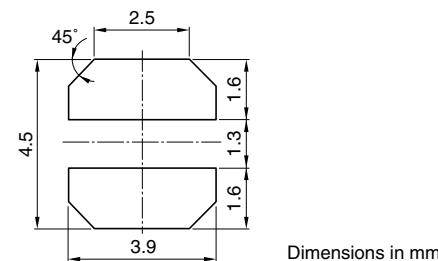

Dimensions in mm

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Inductance tolerance(%)	Test frequency (kHz)	DC resistance(Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change max.	Based on temperature rise typ.
VLCF4020T-1R8N1R9	1.8	±30	100	0.051	0.046	1.97	2.37
VLCF4020T-2R2N1R7	2.2	±30	100	0.059	0.054	1.72	2.19
VLCF4020T-3R3N1R5	3.3	±30	100	0.078	0.071	1.52	1.94
VLCF4020T-4R7N1R2	4.7	±30	100	0.098	0.089	1.24	1.71
VLCF4020T-6R8N1R0	6.8	±30	100	0.131	0.119	1.05	1.47
VLCF4020T-100MR85	10	±20	100	0.185	0.168	0.85	1.22
VLCF4020T-150MR68	15	±20	100	0.303	0.275	0.68	1.0
VLCF4020T-220MR56	22	±20	100	0.431	0.391	0.56	0.8
VLCF4020T-270MR48	27	±20	100	0.496	0.451	0.48	0.8
VLCF4020T-330MR47	33	±20	100	0.628	0.571	0.47	0.69
VLCF4020T-470MR39	47	±20	100	0.934	0.849	0.39	0.56
VLCF4020T-101MR26	100	±20	100	1.4	1.308	0.26	0.45

* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.