



LED



Industrial



Test




Comm



Broadcast

## Single Output 150-240W Power Supplies

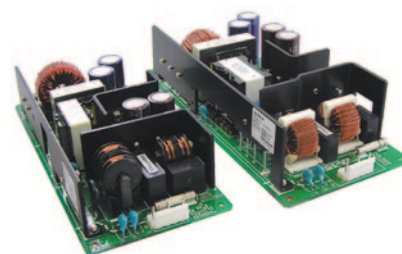

Features	Benefits
• 200% Peak power capability	• Can drive high current start up devices
• 30% smaller than previous generation	• Simplifies equipment design
• Operating temp. -10 to +70°C	• Improved system power optimisation
• 10 Year E-cap lifetime	• Superior reliability

Specification			
Model		ZWS150BP	ZWS240BP
ITEMS			
AC Input Voltage range (3)	-	85 - 265VAC (47-63Hz)	
DC Input Voltage range	-	120 - 370VDC	
Input Current (typical) (2)	A	1.9 / 0.95	2.8 / 1.5
Inrush Current (2)	A	15 / 30A - Cold Start	
Power Factor (Typical) (2) (4)	-	0.98 / 0.93	
Peak Power (5)	-	Conditions for Full Power : <5s Peak Power duration; duty = 35%	
Maximum Ripple and Noise (5)	mV	Tamb ≥ 0° to ≤ 70°C : 24V: 150mV; 36V: 360mV; 48V: 480mV Tamb ≥ -10° to < 0°C : 24V: 360mV; 36V: 540mV; 48V: 720mV	
Temperature Coefficient	-	<0.02% / °C	
Hold Up time (Typ) at 100VAC	ms	20ms	
Leakage Current (6)	-	0.2 / 0.4mA max.	
Remote Control	-	Option ( see table next page )	
Operating Temperature (5)	-	all models are convection : -10°C to +50°C=100% load; +60°C=75% load ; +70°C : 150W models=50% load ; 240W models=30% load	
Storage Temperature	°C	-30 to +75°C	
Humidity (non condensing)	-	Operating: 30 - 90%RH, Storage: 10 - 90%RH	
Withstand Voltage	-	I/P to Grnd 2kVAC (10mA), I/P to O/P: 3kVAC (10mA), O/P to Grnd: 500VAC (20mA) for 1mn	
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Grnd: 500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s <sup>2</sup> constant X, Y, Z 1 hour	
Shock	-	<196.1 m/s	
Safety agency Certifications	-	UL60950-1, CSA60950-1, EN60950-1, EN50178 (OV II), CE Mark	
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC-B, VCCI-B	
Immunity	-	IEC61000-4-2 (lv 2, 3), -3 (lv 3), -4 (lv 3), -5 (lv 3, 4), -6 (lv 3), -8 (lv 4), -11	
Weight (Typ)	g	360	520
Size (W x H x D)	mm	75 x 37 x 160	84 x 42 x 180

### Notes:

(1) Avoid prolonged operation in overload (2) 100 / 200VAC Input (3) 85-90Vac = output current = 80%

(4) Built to meet EN 61000-3-2 (5) Refer to detailed specifications & Application Notes

(6) 100/230VAC Input


## Model Selector

Model	Output Voltage (V)	Output Adjust Range (V)	Average Output Current (A)	Peak Output Current (A)	Average Output Power (W)	Peak Output Power (W)	Efficiency at 200VAC Input (%)	Load reg (mV)	Line reg (mV)	OCP (A)	OVP (V)
ZWS150BP-24	24	21.6 - 27.5	6.3	12	151.2	288	90	192	96	12.66	28.8 - 33.6
ZWS150BP-36	36	32.4 - 39.6	4.2	8	151.2	288	90	288	144	8.44	41.4 - 48.6
ZWS150BP-48	48	39.6 - 52.8	3.2	6	153.6	288	90	384	192	6.43	55.2 - 64.8
ZWS240BP-24	24	21.6 - 27.5	10	20	240	480	91	192	96	20.10	28.8 - 33.6
ZWS240BP-36	36	32.4 - 39.6	6.7	13.4	241.2	482.4	91	288	144	13.47	41.4 - 48.6
ZWS240BP-48	48	39.6 - 52.8	5	10	240	480	91	384	192	10.05	55.2 - 64.8


## Option Description

	Suffix
L-Plate and Cover	/A
L-Plate	/L
Conformally coated PCB	/CO2
Remote on/off	/R
Terminal Block (240W models only)	/T


/A Option

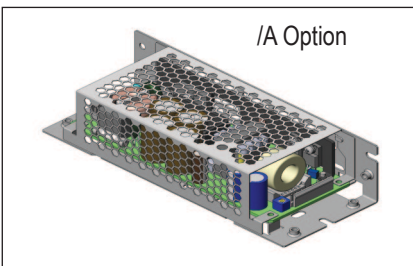


/L Option

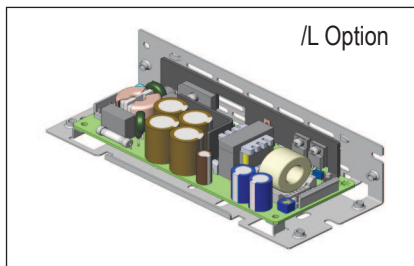

## Outline Drawing ZWS150BP

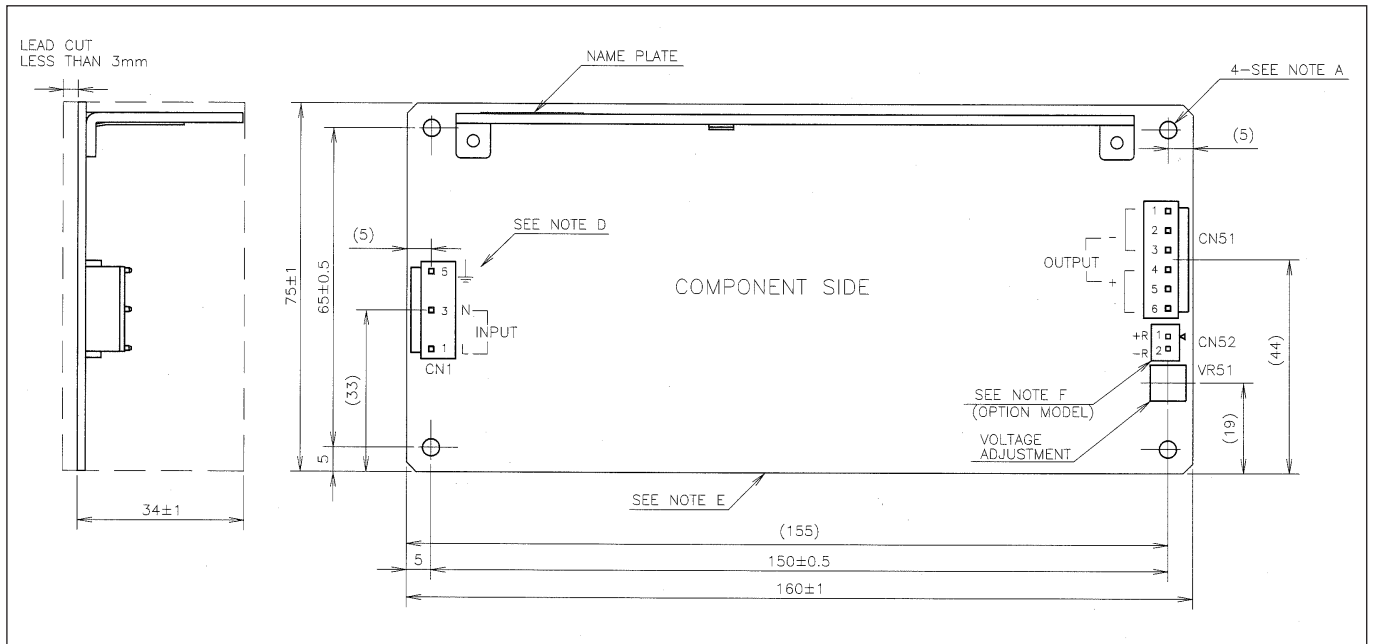

## Outline Drawing ZWS240BP

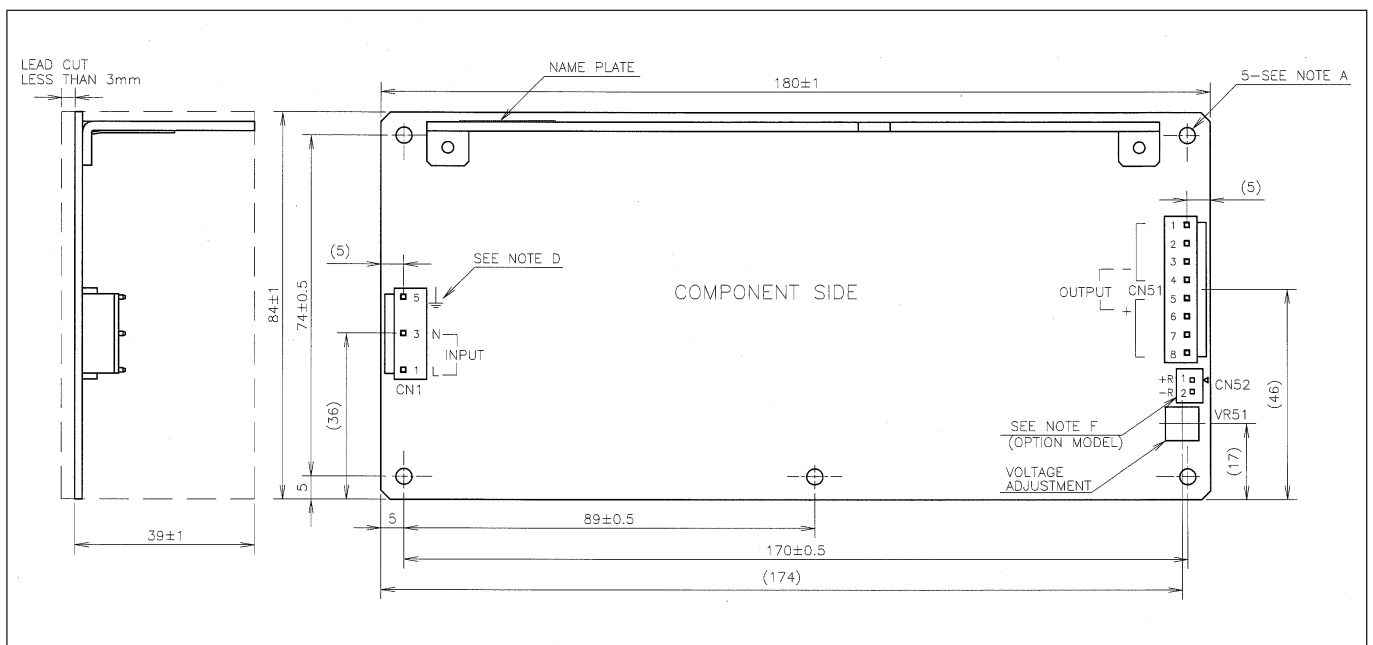

## TDK-LAMBDA EMEA

[www.emea.tdk-lambda.com](http://www.emea.tdk-lambda.com)



### TDK-Lambda France SAS

ZAC des Delaches  
CS 41077  
9 rue Thuillere  
91978 Villebon Courtaboeuf  
France  
Tel: +33 1 60 12 71 65  
Fax: +33 1 60 12 71 66  
[france@fr.tdk-lambda.com](mailto:france@fr.tdk-lambda.com)  
[www.fr.tdk-lambda.com](http://www.fr.tdk-lambda.com)



Italy Sales Office  
Via dei Lavoratori 128/130  
20092 Cinisello Balsamo (MI)  
Italy  
Tel: +39 02 61 29 38 63  
Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.it.tdk-lambda.com](http://www.it.tdk-lambda.com)



### TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40  
77855 Achern  
Germany  
Tel: +49 7841 666 0  
Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



Austria Sales Office  
Aredstrasse 22  
2544 Leobersdorf  
Austria  
Tel: +43 2256 655 84  
Fax: +43 2256 645 12  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



### TDK-Lambda UK Ltd.

Kingsley Avenue  
Ilfracombe  
Devon EX34 8ES  
United Kingdom  
Tel: +44 (0) 12 71 85 66 66  
Fax: +44 (0) 12 71 86 48 94  
[powersolutions@uk.tdk-lambda.com](mailto:powersolutions@uk.tdk-lambda.com)  
[www.uk.tdk-lambda.com](http://www.uk.tdk-lambda.com)



### TDK-Lambda Ltd.

Kibbutz  
Givat Hashlosha 48800  
Israel  
Tel: +9 723 902 4333  
Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.tdk-lambda.co.il](http://www.tdk-lambda.co.il)



### Russia

Technical Support:  
St Petersburg  
Tel: +7 (812) 6580463  
Sales:  
Moscow  
Tel: +7 (499) 7557732  
[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)  
[www.tdk-lambda.ru](http://www.tdk-lambda.ru)

## Local Distribution