

NO	件號 PAT.NO	品名 NAME	材質 MATL.	件數 SHT	處理 TREAT	備註 REMARK
1	C-1602-RA	A部本體 SHELL(A)	鋅合金 Zn ALLOY	1	鍍鎳 M--Cr	———
2	C-1603-RA-R	電木含針 INSULATOR	電木 BAKELITE	1	———	———
3	C-1602-RC-R	導針 CONTACT	黃銅 BRASS	3	鍍鎳 M--Ni	———
4	C-1602-RD	扣環 RING	工具鋼 SK5	1	鍍鎳 M--Ni	———

智慧財產權 請勿抄襲盜用


APEX CONNECTOR PROPRIETARY

本產品符合 RoHS 指令



參考圖面
REFER ORAIVING

NO.	ELECTRICAL CHARACTERISTICS	
1	Rated Current/voltage	5A 125V
2	Operation limit voltage (AC.V.rms)	200
3	Withstanding voltage (AC.V.rms) 1 minute	1000
4	Insulation resistance(MΩ MIN.) at DC 500V	1000
5	Contact resistance (mΩ MAX.) at DC 1A	3

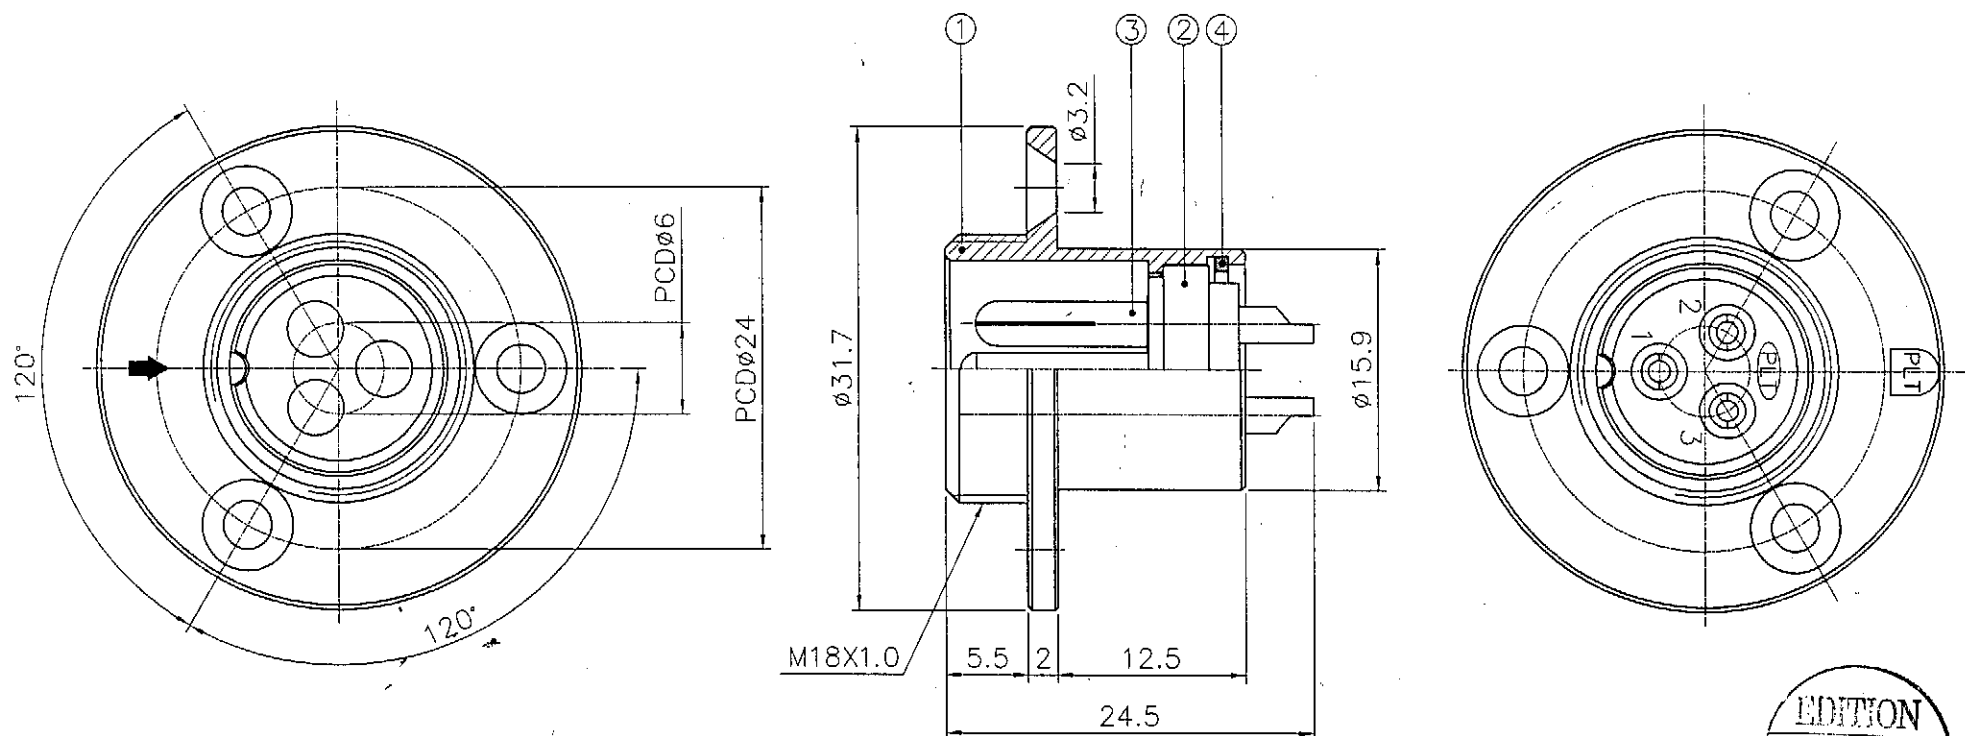

ISO-9001:2000 CERTIFIED MANUFACTURER		機 種 MODEL	PLK-163-R-R		DATE	84.01.13	UNIT	mm		DESIGNER	開發部	CHECKED	Yang	APPROVE	劉
鋁銅精密科技股份有限公司 APEX PRECISION TECHNOLOGY CORP.		品 名 NAME	3 PIN CONNECTOR		TOLERANCE	±0.2	SCALE	2X		2006.11.20	Mag	查	12/1	95.11.21	文謙
PLT	變更說明	NO.			公 差	±0.2	比 例	2X		計	計	計	計	計	計