

CME1500A/RF

A279-01-01/RF

SPECIFICATIONS(1/2)


MODEL			CME1500A -12/RF	CME1500A -15/RF	CME1500A -24/RF	CME1500A -36/RF	CME1500A -48/RF
ITEMS							
1	Nominal Output Voltage	V	12	15	24	36	48
2	Maximum Output Current	A	125	100	63	42	32
3	Maximum Output Power	W	1500	1500	1512	1512	1536
4	Efficiency (Typ) (*)13	100/115VAC	%	81/82	81/82	85/85	85/85
		200/230VAC	%	84/85	84/85	88/88	88/88
5	Input Voltage Range	(*)2)(*)11	-	85 - 265VAC (47 - 63Hz) or 120 - 340VDC			
6	Input Current (Typ) (*)13	100/115VAC	A	19 / 16			
		200/230VAC	A	10 / 8			
7	Inrush Current (Typ)	(*)1)(*)3	-	20A / 40A at 1st Inrush , 60A / 60A at 2nd Inrush			
8	PFHC		-	Designed to meet IEC61000-3-2			
9	Power Factor (Typ)	(*)1	-	0.98/0.95			
10	Output Voltage Range	V	10.2 - 14.4	12.8 - 18.0	20.4 - 28.8	30.6 - 43.2	40.8 - 52.8
11	Maximum Ripple & Noise (*)4	0≤Ta≤60°C	mV	150	150	180	250
		-20≤Ta<0°C	mV	180	180	200	300
12	Maximum Line Regulation	(*)5)(*)11	mV	48	60	96	144
13	Maximum Load Regulation	(*)6)(*)11	mV	96	120	144	216
14	Temperature Coefficient		-	Less than 0.02% / °C			
15	Over Current Protection	(*)7	A	131.3 -	105.0 -	66.2 -	44.1 -
16	Over Voltage Protection	(*)8	V	15.0 - 18.0	18.8 - 22.5	30.0 - 36.0	45.0 - 54.0
17	Hold-up Time (Typ)	(*)1	-	20ms			
18	Leakage Current	(*)9	-	Less than 0.3mA			
19	Remote Sensing	(*)14	-	Possible			
20	Monitoring Signal	(*)14	-	Possible			
21	Remote Control	(*)14	-	Possible			
22	Parallel Operation	(*)14	-	Possible			
23	Series Operation	(*)14	-	Possible			
24	Operating Temperature	(*)10)(*)11	-	-20 - +70°C (-20 - +50°C:100%, +60°C:75%, +70°C:50%)			
25	Operating Humidity		-	20 - 90%RH (No Condensing)			
26	Storage Temperature		-	-30 - +75°C			
27	Storage Humidity		-	10 - 90%RH (No Condensing)			
28	Cooling	(*)15	-	Forced Air Cooling (Variable fan speed, Intake fan)			
29	Withstand Voltage		-	Input-FG : 2kVAC (20mA) 1xMOPP, Input-Output : 4kVAC (20mA) 2xMOPP, Output-FG : 1.5kVAC (20mA) 1xMOPP for 1min			
30	Isolation Resistance		-	More than 100MΩ at 25°C and 70%RH Output to Chassis : 500VDC			
31	Vibration		-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.			
32	Shock		-	Less than 196m/s ²			
33	Safety		-	Approved by UL60950-1, CSA60950-1, EN60950-1, ES60601-1 3rd Edition, EN60601-1 3rd Edition, CSA-C22.2 No.60601-1 3rd Edition. UL62368-1, EN62368-1, CSA62368-1, EN62477-1(OVC III). Designed to meet Den-an Appendix 12 (J60950-1).			
34	Line DIP		-	Designed to meet SEMI-F47 (200VAC Line only)			
35	Conducted Emission	(*)12	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B			
36	Radiated Emission	(*)12	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B			
37	Immunity	(*)12	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11			
38	Weight (Typ)	g		3000			
39	Size (W x H x D)	mm		127 x 63 x 261 (Refer to Outline Drawing)			
40	Standby supply		-	5V / 1A			

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50-60Hz).
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- *4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- *5. 85 - 265VAC, constant load.
- *6. No load-Full load, constant input voltage.
- *7. Constant current limit with automatic recovery. Over current condition for more than 5 seconds will cause the output to shut down. Avoid to operate at over load or short circuit condition.
- *8. OVP circuit will shut down output, manual reset (Re power on).
- *9. Measured by the each measuring method of UL, CSA, EN and Den-an(at 60Hz), Ta=25°C.
- *10. Output Derating
 - Refer to LOAD vs. AMBIENT TEMPERATURE(A279-01-02/RF-).
 - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- *11. Output derating needed when input voltage less than 90VAC. Refer to LOAD vs. INPUT VOLTAGE(A279-01-02/RF-).
- *12. The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC directives.
- *13. Ta=25°C, nominal output voltage and maximum output power.
- *14. Refer to instruction manual(A279-04-01).
- *15. Fan noise depend on output power and internal temperature.
Fan noise is 52dB(typ) at 30°C / 70% load.

Fig.A

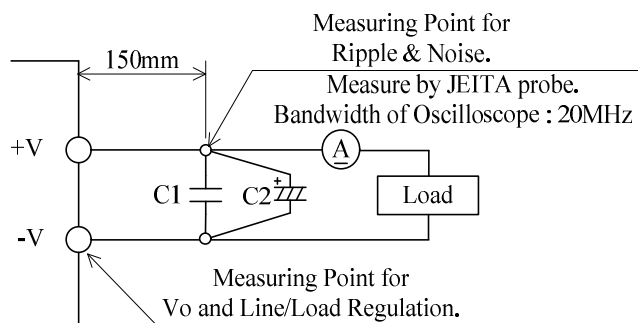

C1 : Film Cap. 0.1µF
C2 : Elect. Cap. 47µF

CME1500A/RF

OUTPUT DERATING

A279-01-02/RF

Ta (°C)	LOAD (%)
	MOUNTING A-D
-20 - +50	100
60	75
70	50

INPUT VOLTAGE (VAC)	LOAD (%)
	MOUNTING A-D
85	80
90 - 265	100

