

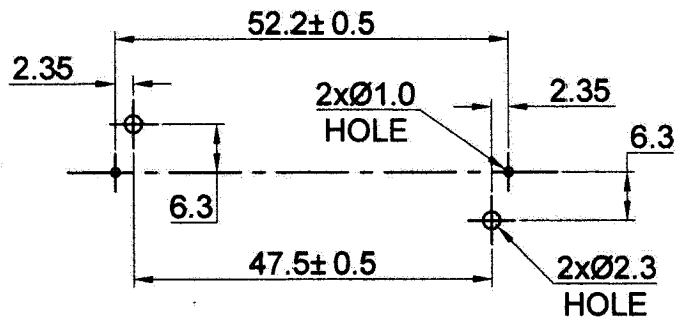
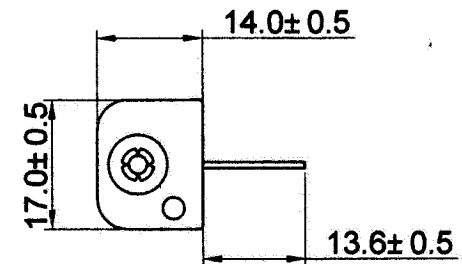
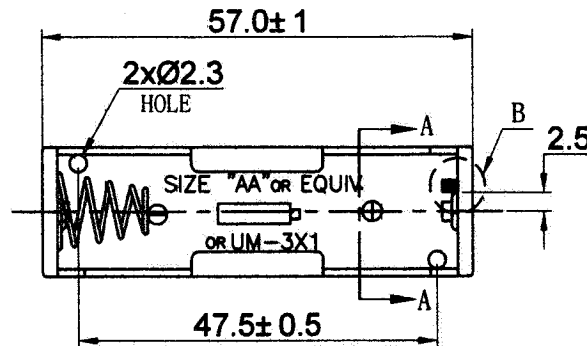



SECTION A-A



PCB/MOUNTING LAYOUT

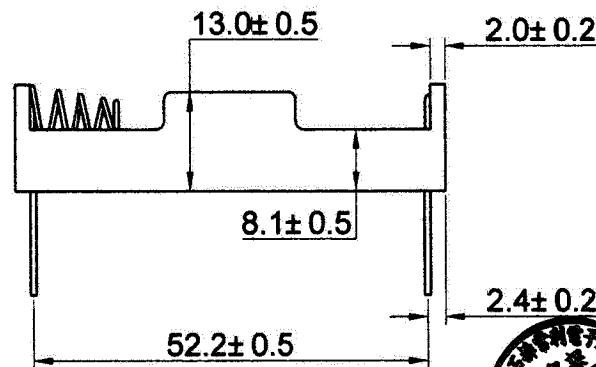

DETAIL "B" S=2:1  
Polarity protection device

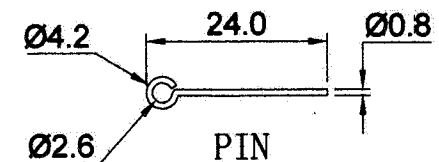

# SPECIFICATION

- (1) ITEM NO: BH-311-1P24/PPD
- (2) WITH PIN: Ø0.8X24MM, BRASS NICKEL PLATED
- (3) MATERIAL: P.P RESIN, BLACK COLOR
- (4) SPRING: 0.6MM 65C SPRING STEEL  
NICKEL PLATED
- (5) RIVET: BRASS NICKEL PLATED
- (6) RoHS COMPLIANT



| 3                             |              |      |
|-------------------------------|--------------|------|
| 2                             |              |      |
| 1                             |              |      |
| NO.                           | MODIFICATION | DATE |
| <p>THIRD ANGLE PROJECTION</p> |              |      |

|                                       |                                              |       |                           |
|---------------------------------------|----------------------------------------------|-------|---------------------------|
| <b>COMFORTABLE ELECTRONIC CO.LTD.</b> |                                              |       |                           |
| NAME                                  | BATTERY HOLDER: BH-311-1P <sub>24</sub> /PPD |       |                           |
| SCALE                                 | 1:1                                          | APPD  | <i>[Signature]</i>        |
| UNIT                                  | MM                                           | CHKD  | <i>[Signature]</i>        |
| MAT'L                                 | AS SPEC.                                     | DWN   | HUHONGWEI                 |
| DATE                                  | MAR. 10. 2008                                | DR NO | 3111P <sub>24</sub> -0308 |