

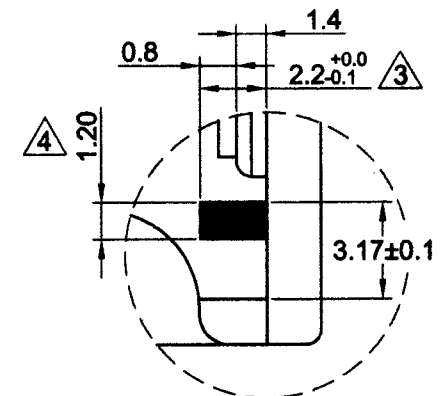
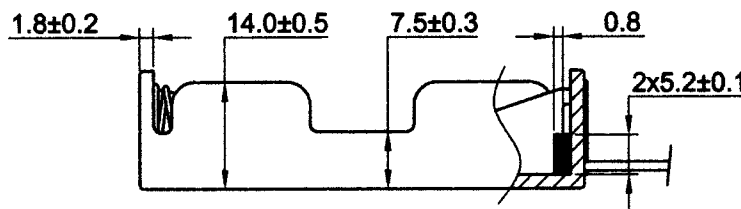




DETAIL "A" S=4
POLARITY PROTECTION DEVICE

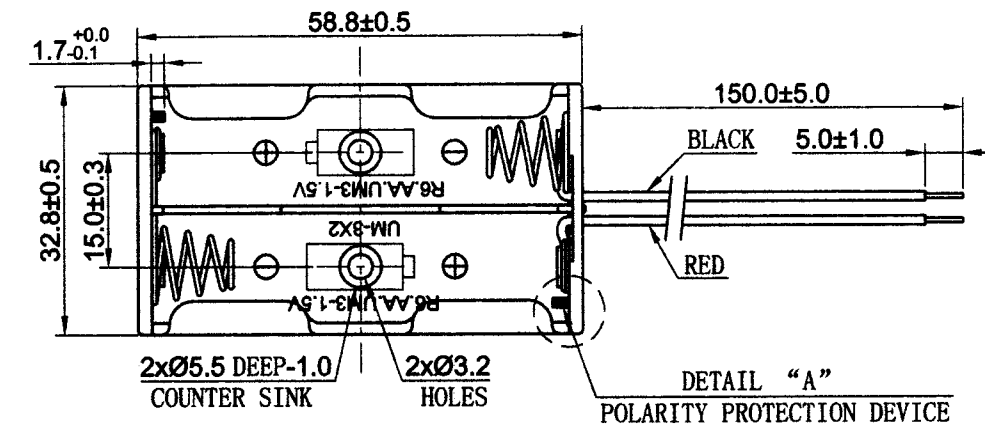

SPECIFICATION

- (1) ITEM NO. : BH-321-2A
- (2) WIRE: UL1007 AWG#26
BLACK & RED: 150MM±5MM
STRIP & TIN: 5MM±1MM
- (3) HOLDER MATERIAL: PP 94HB RESIN, BLACK COLOR
- (4) SPRING MATERIAL: Ø0.65MM SPRING STEEL NICKEL PLATED
- (5) RIVET MATERIAL: BRASS NICKEL PLATED
- (6) RoHS COMPLIANT

4	Changed P.P.D.configuration	AUG/03/2012
3	1. Changed P.P.D.dimension from 1.7 to 2.2 2. Changed the positive rivet from 5x2.4x4 to 8x2.4x4	FEB/14/2012
2	Changed P.P.D.dimension from 1.4 to 1.7, from 2.2 to 3.17	NOV/15/2011
1	Changed P.P.D.dimension from 2.0 to 1.4	JUL/03/2004
NO.	MODIFICATION	DATE
General Tolerances		
0 ~ >3	± 0.10	30 ~ >120 ± 0.30
3 ~ >6	± 0.10	120 ~ >400 ± 0.50
6 ~ >30	± 0.20	Angle: ± 3°



COMFORTABLE ELECTRONIC CO.LTD.

NAME	BATTERY HOLDER: BH-321-2A		
SCALE	1:1	APPD	陈鹏发 8.12
UNIT	MM	CHKD	黄少华 8.12
MAT'L	SEE SPEC.	DWN	陈鹏发
DATE	DEC. 25. 2002	DR NO	3212A-1202