

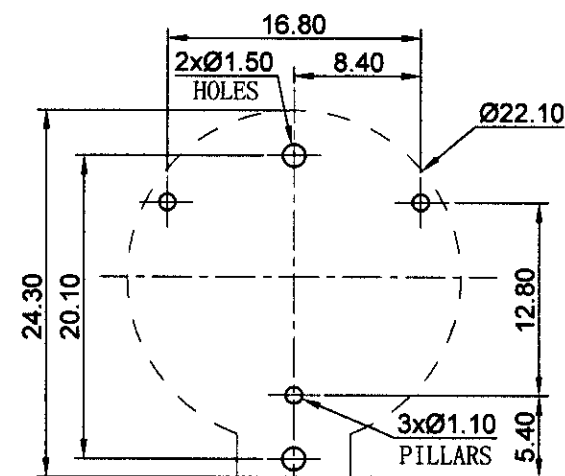
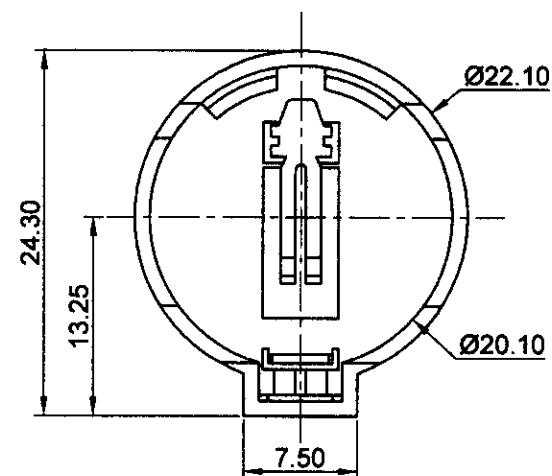


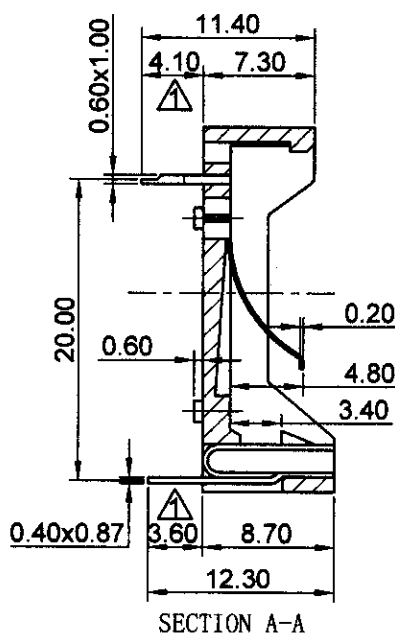

PCB MOUNTING LAYOUT

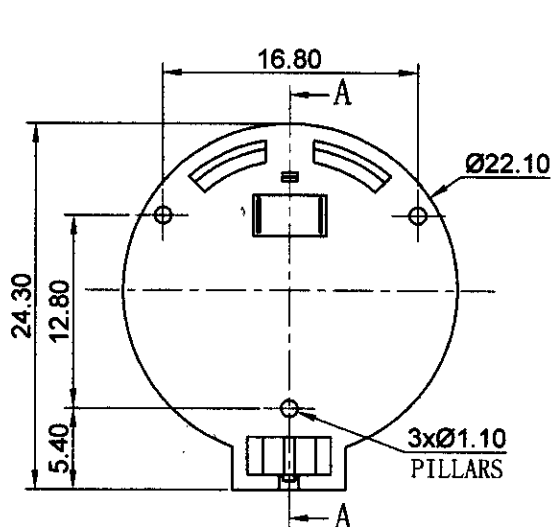

SPECIFICATION

- (1) ITEM NO.: CH224-2032LF
- (2) HOUSING MATERIAL: PBT UL94V0, BLACK COLOR
- (3) CONTACT MATERIAL: ANODE: 0.4MM THICK BRASS TIN PLATED
CATHODE: 0.2MM THICK BRASS TIN PLATED
- (4) CURRENT RATING : 0.5A DC
- (5) VOLTAGE RATING : 12V DC
- (6) CONTACT RESISTANCE: 30 MILLIOHMS MAX
- (7) INSULATION RESISTANCE: 1000 MEGAOHMS MIN
- (8) TEMPERATURE RANGE: -55° TO +85°
- (9) HUMIDITY: 40℃±2℃ , 90~95% RH FOR 96 HOURS
- (10) RoHS COMPLIANT

⚠	1.Changed contact material from phosphor bronze to brass 2.Changed pin dimensions from 3.9 to 4.10 & 3.60	Aug/12 /2014	COMFORTABLE ELECTRONIC CO.,LTD.			
			NAME	COIN CELL HOLDER: CH224-2032LF		
NO.	MODIFICATION	DATE	SCALE	2:1	APPD	游原正
General Tolerances			UNIT	MM	CHKD	黄永连
0 ~ >3	± 0.10	30 ~ >120	The Third Angle Projection	MAT'L	SEE SPEC.	RAOXIANHUI
3 ~ >6	± 0.10	120 ~ >400		DATE	AUG. 12. 2014	DR NO
6 ~ >30	± 0.20	Angle: ± 3°				CH224-0814