

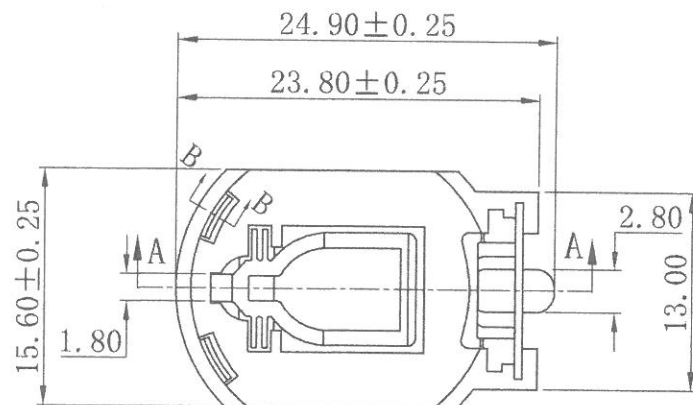


SECTION A-A



SECTION B-B

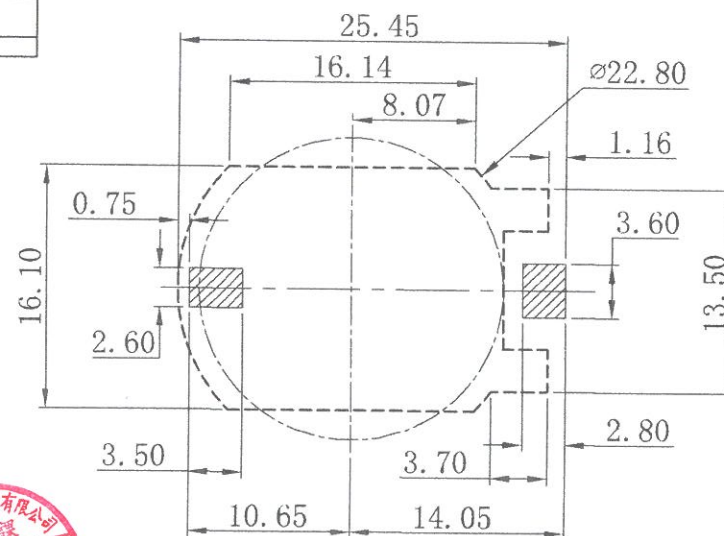

PCB MOUNTING LAYOUT



SPECIFICATION

- (1) PART NO. : CH7410-2032LF
- (2) MATERIAL:
HOUSING: PPS+40%GF UL94V0 BROWN COLOR
TERMINAL: PHOSPHOR BRONZE 0.2MM THK
GOLD 1u" PLATED; Ni 50u" MIN. UNDERPLATING
- (3) CURRENT RATING: 0.5A/DC
- (4) VOLTAGE RATING: 3V/DC
- (5) CONTACT RESISTANCE: 30MΩ MAX
- (6) INSULATION RESISTANCE: 1000MΩ MIN
- (7) TEMPERATURE RANGE: -25°C TO +85°C
- (8) HUMIDITY: 40°C AND 90-95% RH FOR 96 HOURS
- (9) RoHS COMPLIANT

3			COMP COMFORTABLE ELECTRONIC CO.LTD.		
2					
1					
NO.	MODIFICATION	DATE	NAME	BATTERY HOLDER: CH7410-2032LF	
General Tolerances			SCALE	2:1	APPD 張厚正 2022.08.22
0 ~ >3	± 0.10	30 ~ >120 ± 0.30	UNIT	MM	CHKD 劉志強 2022.08.22
3 ~ >6	± 0.10	120 ~ >400 ± 0.50	MAT'L	SEE SPEC.	DWN
6 ~ >30	± 0.20	Angle: ± 3°	DATE	AUG. 29. 2022	DR NO CH7410-0822

