



RoHS10 Support

REACH Support

CFSI Support

IP66 Waterproof after mating (Requires waterproof tube)

○形状 (SHAPE)

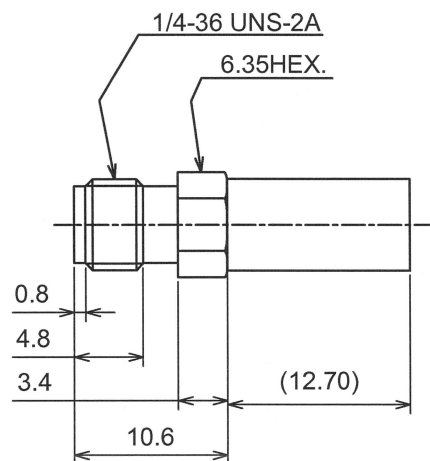

○規格 (STANDARD)

MIL-C-39012

○仕様 (SPECIFICATION)

特性インピーダンス (Impedance): 50 Ω

定格周波数 (Working Frequency Range): DC~6GHz

電圧定在波比 (VSWR): ≤1.35 max at 6GHz

挿入損失 (Insertion Loss): 0.04 dB max × √f GHz (f:Frequency)

定格電圧 (Voltage Rating): 335 Vrms max

耐電圧 (Proof Voltage): 700 Vrms max


勘合保証回数 (Connector Life): 500 times min

使用温度範囲 (Temperature range): -65°C~165°C




○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

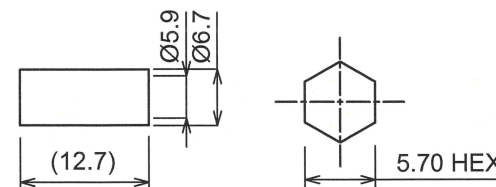

RECOMMENDED CRIMP HEIGHT 5.76±0.2

4	Ferrule	BRASS	NICKEL
3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS .XX ±0.08	.X ±0.13				
DIAMETER .X ±0.03			Unit	NAME	REV
Approved	Checked	Drawn	mm		
			A4	SMA-RS-RG223U	2