



RoHS10 Support

REACH Support

CFSI Support

IP66 Waterproof after mating (Requires waterproof tube)

○形状 (SHAPE)

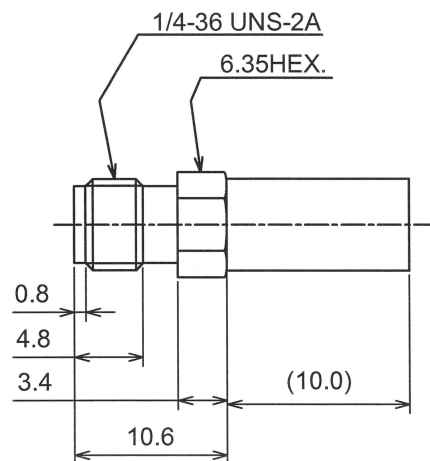

○規格 (STANDARD)

MIL-C-39012

○仕様 (SPECIFICATION)

特性インピーダンス (Impedance): 50Ω

定格周波数 (Working Frequency Range): DC~6GHz

電圧定在波比 (VSWR): ≤ 1.35 max at 6GHz挿入損失 (Insertion Loss): $0.04\text{ dB max} \times \sqrt{f\text{ GHz}}$ (f:Frequency)

定格電圧 (Voltage Rating): 335 Vrms max

耐電圧 (Proof Voltage): 700 Vrms max


勘合保証回数 (Connector Life): 500 times min

使用温度範囲 (Temperature range): $-65^{\circ}\text{C} \sim 165^{\circ}\text{C}$ 

4	Ferrule	BRASS	NICKEL
3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH


○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

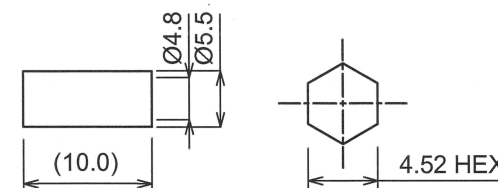RECOMMENDED CRIMP HEIGHT 4.73 ± 0.2

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ± 0.08	.X ± 0.13			
DIAMETER	.X ± 0.03				
Approved	Checked	Drawn	Unit	NAME	REV
			mm		
山崎	大江	大江	A4	SMA-RS-RG303U	2