
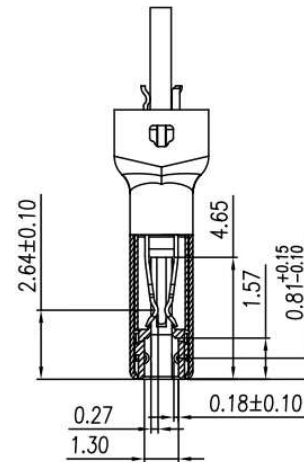
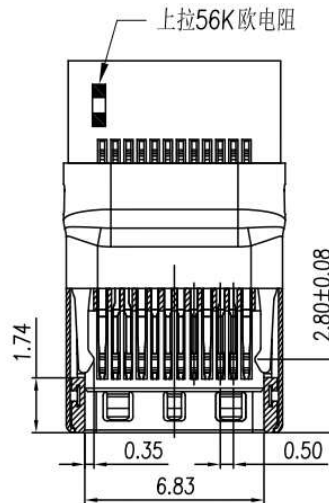



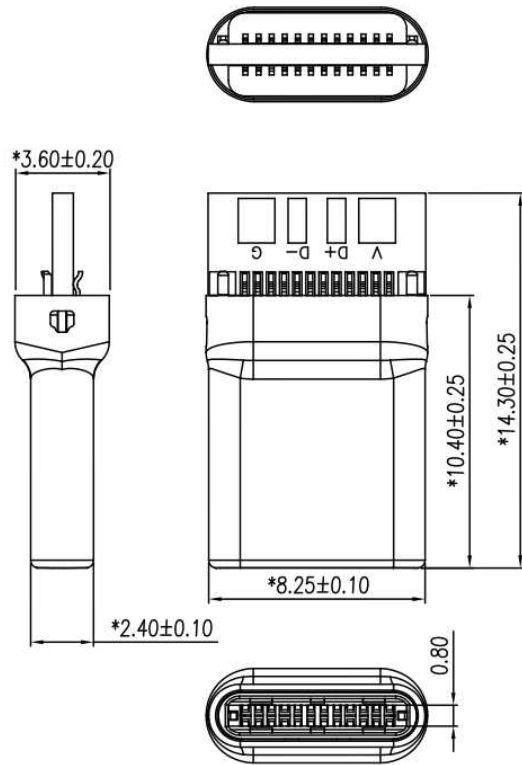

NOTE:

1.ELECTRICAL CHARACTERISTICS;

1.1 CONTACT RESISTANCE: 40m Ω Max FOR INITIAL. 50m Ω CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.

1.2 CONTACT CURRENT RATING: 3A FOR VBUS PIN; 1.25A FOR VCONN PIN.

1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.

1.4 INSULATION RESISTANCE 100M Ω Min

1.5 OPERATING TEMPERATURE: -25°C ~ 80°C

2.MECHANICAL CHARACTERISTICS:

2.1 MATING FORCE: 5~20N

2.2 UNMATED FORCE: 8~20N

2.3 DURABILITY: 10,000 CYCLES

6	RESISTANCE	1	/	0402	56K Ω
5	Shell	1	SUS	T=0.15mm	matte Tin Plated/Nickel Plated
4	LATCH	1	SUS	T=0.30mm	matte Tin Plated/Nickel Plated
3	Gnd plates	2	SUS	T=0.10mm	Solder area: Gold Plated
2	Contact	24	COPPER ALLOY	T=0.15mm	Contact area: 1u" PD/Ni+Gold Plated Solder area: 80u"min. matte Tin Plated over Nickel
1	Housing	3	THERMOPLASTIC	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 1°

照片框

ORDER INFORMATION

USB-PS-24C-LF

SERIES


LEADFREE

24 WAY C TYPE

SOLDER

MALE

DESCRIPTION: USB C TYPE(M) 2.0 拉伸殼 帶PCB

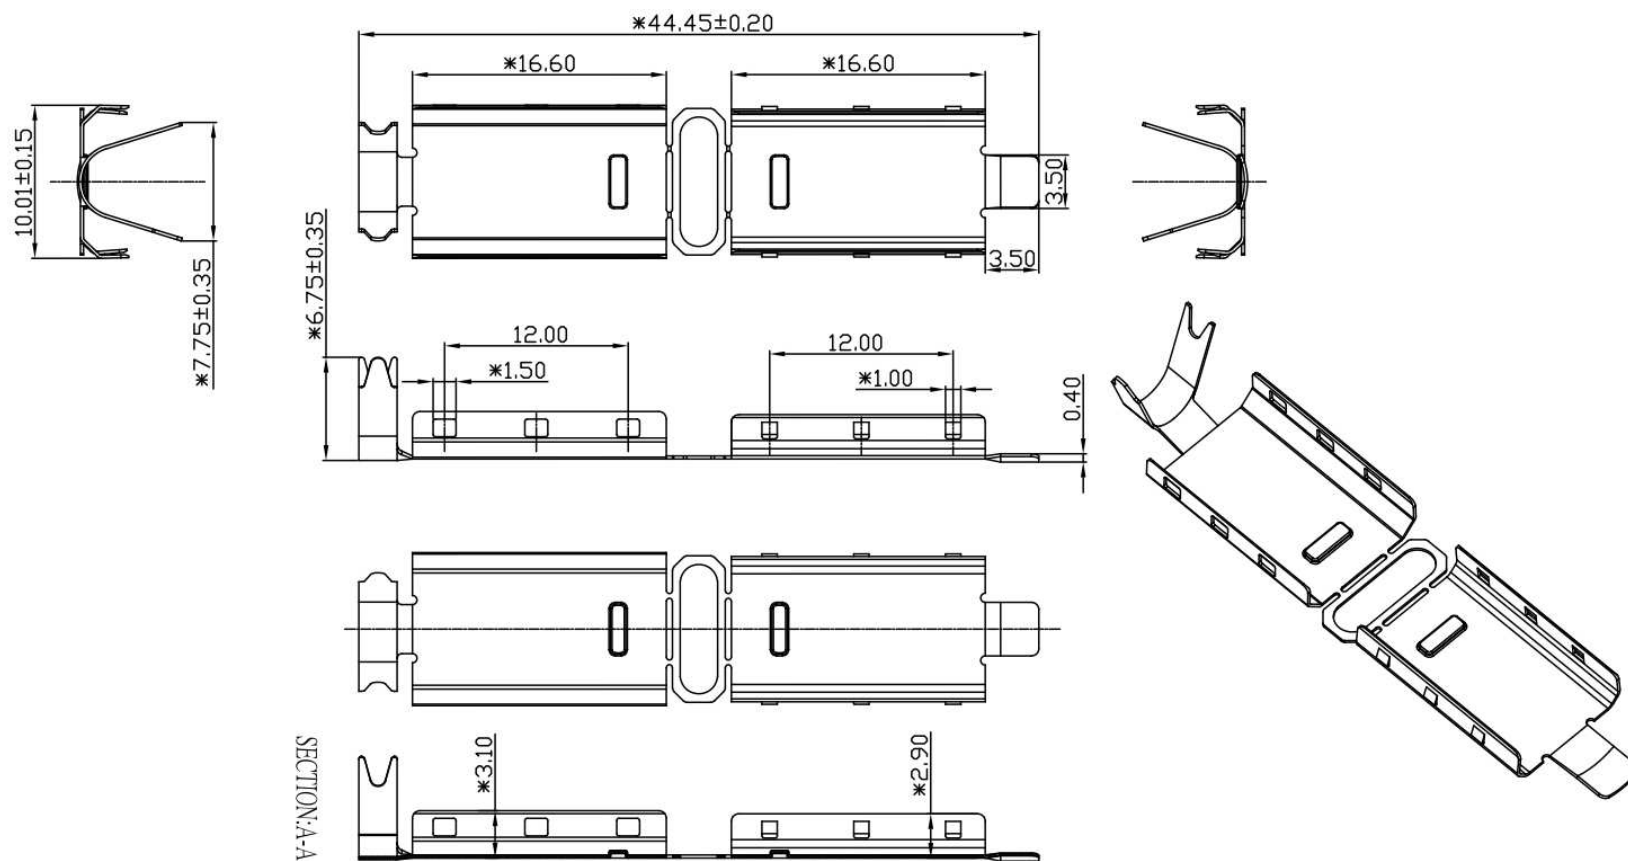

NOTE :

1. 材質 : SUS304, T=0.2mm
2. 毛邊 0.02 mm MAX
3. 不能有壓傷, 模痕等不良

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-PS-24C-LF
SERIES LEADFREE
24 WAY C TYPE
SOLDER
MALE

DESCRIPTION: USB C TYPE(M) 二合一裝配殼