


▼ ブラケット


BK20~60

BK70,80

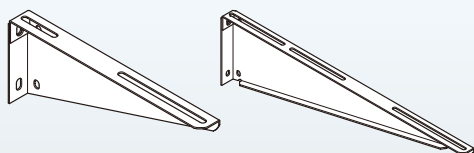

BKL20~60


BKL70,80

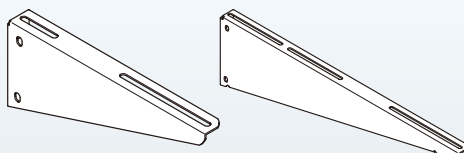


仕様	ご注文品番	A	板厚	適合 ラック幅	単品 質量	梱包・結束	販売 単位	標準価格 (円)	納期 区分
P	BK20	300	2.3	200	0.78	20	—	1個 1,200	
P	BK30	400	2.3	300	0.96	20	—	1個 1,380	
P	BK40	500	3.2	400	1.65	10	—	1個 1,860	
P	BK50	600	3.2	500	2.30	6	—	1個 2,420	
P	BK60	700	3.2	600	2.68	6	—	1個 2,680	
P	BK70	800	3.2	700	3.30	4	—	1個 6,220	セ
P	BK80	900	3.2	800	3.95	4	—	1個 6,720	セ
SD	SD-BK20	300	2.3	200	0.74	20	—	1個 1,420	
SD	SD-BK30	400	2.3	300	0.96	20	—	1個 1,700	
SD	SD-BK40	500	3.2	400	1.56	10	—	1個 2,960	
SD	SD-BK50	600	3.2	500	2.29	6	—	1個 3,580	
SD	SD-BK60	700	3.2	600	2.66	6	—	1個 3,960	
SD	SD-BK70	800	3.2	700	3.26	4	—	1個 5,400	セ
SD	SD-BK80	900	3.2	800	3.69	4	—	1個 5,700	セ
Z	Z-BK20	300	2.3	200	0.76	20	—	1個 1,440	
Z	Z-BK30	400	2.3	300	1.00	20	—	1個 1,720	
Z	Z-BK40	500	3.2	400	1.62	10	—	1個 2,980	
Z	Z-BK50	600	3.2	500	2.34	6	—	1個 3,600	
Z	Z-BK60	700	3.2	600	2.73	6	—	1個 3,980	
Z	Z-BK70	800	3.2	700	3.31	4	—	1個 5,420	納
Z	Z-BK80	900	3.2	800	3.85	4	—	1個 5,720	セ

仕様	ご注文品番	A	板厚	適合 ラック幅	単品 質量	梱包・結束	販売 単位	標準価格 (円)	納期 区分
P	BKL20	300	2.3	200	0.78	20	—	1個 1,200	
P	BKL30	400	2.3	300	0.96	20	—	1個 1,380	
P	BKL40	500	3.2	400	1.65	10	—	1個 1,860	
P	BKL50	600	3.2	500	2.30	6	—	1個 2,420	
P	BKL60	700	3.2	600	2.68	6	—	1個 2,680	
P	BKL70	800	3.2	700	3.30	4	—	1個 6,220	セ
P	BKL80	900	3.2	800	3.95	4	—	1個 6,720	セ
SD	SD-BKL20	300	2.3	200	0.74	20	—	1個 1,420	
SD	SD-BKL30	400	2.3	300	0.96	20	—	1個 1,700	
SD	SD-BKL40	500	3.2	400	1.56	10	—	1個 2,960	
SD	SD-BKL50	600	3.2	500	2.29	6	—	1個 3,580	
SD	SD-BKL60	700	3.2	600	2.66	6	—	1個 3,960	
SD	SD-BKL70	800	3.2	700	3.26	4	—	1個 5,400	セ
SD	SD-BKL80	900	3.2	800	3.69	4	—	1個 5,700	セ
Z	Z-BKL20	300	2.3	200	0.76	20	—	1個 1,440	
Z	Z-BKL30	400	2.3	300	1.00	20	—	1個 1,720	
Z	Z-BKL40	500	3.2	400	1.62	10	—	1個 2,980	
Z	Z-BKL50	600	3.2	500	2.34	6	—	1個 3,600	
Z	Z-BKL60	700	3.2	600	2.73	6	—	1個 3,980	
Z	Z-BKL70	800	3.2	700	3.31	—	—	1個 5,420	納
Z	Z-BKL80	900	3.2	800	3.85	4	—	1個 5,720	セ


BK,BKL20~40




BK,BKL50,60



BK,BKL70,80

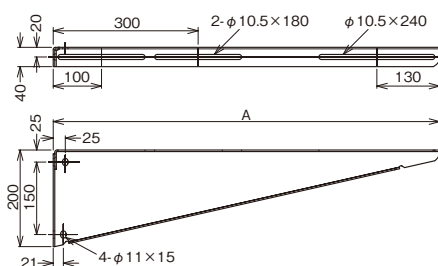

※() 寸法はBK,BKL20,30




※各仕様共通

品番	許容静荷重 N[kgf]
BK20,BKL20	2,941 [300]
BK30,BKL30	2,255 [230]
BK40,BKL40	2,451 [250]
BK50,BKL50	3,530 [360]
BK60,BKL60	2,941 [300]
BK70,BKL70	2,451 [250]
BK80,BKL80	2,451 [250]

使用上のご注意

●許容静荷重はブラケットのみの強度です。壁面にアンカーボルト等で施工の際はアンカーボルトの引抜力も考慮し、ブラケットへの積載荷重を決めてください。

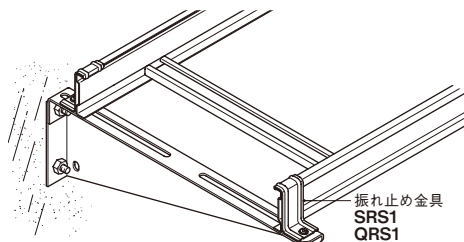

SRS1 ▶ 855P
QRS1 ▶ 911P

※ブラケットを取り付けるボルトは、W3/8又はM10をご使用ください。